



TVCR13E


REC-C SIGNAL

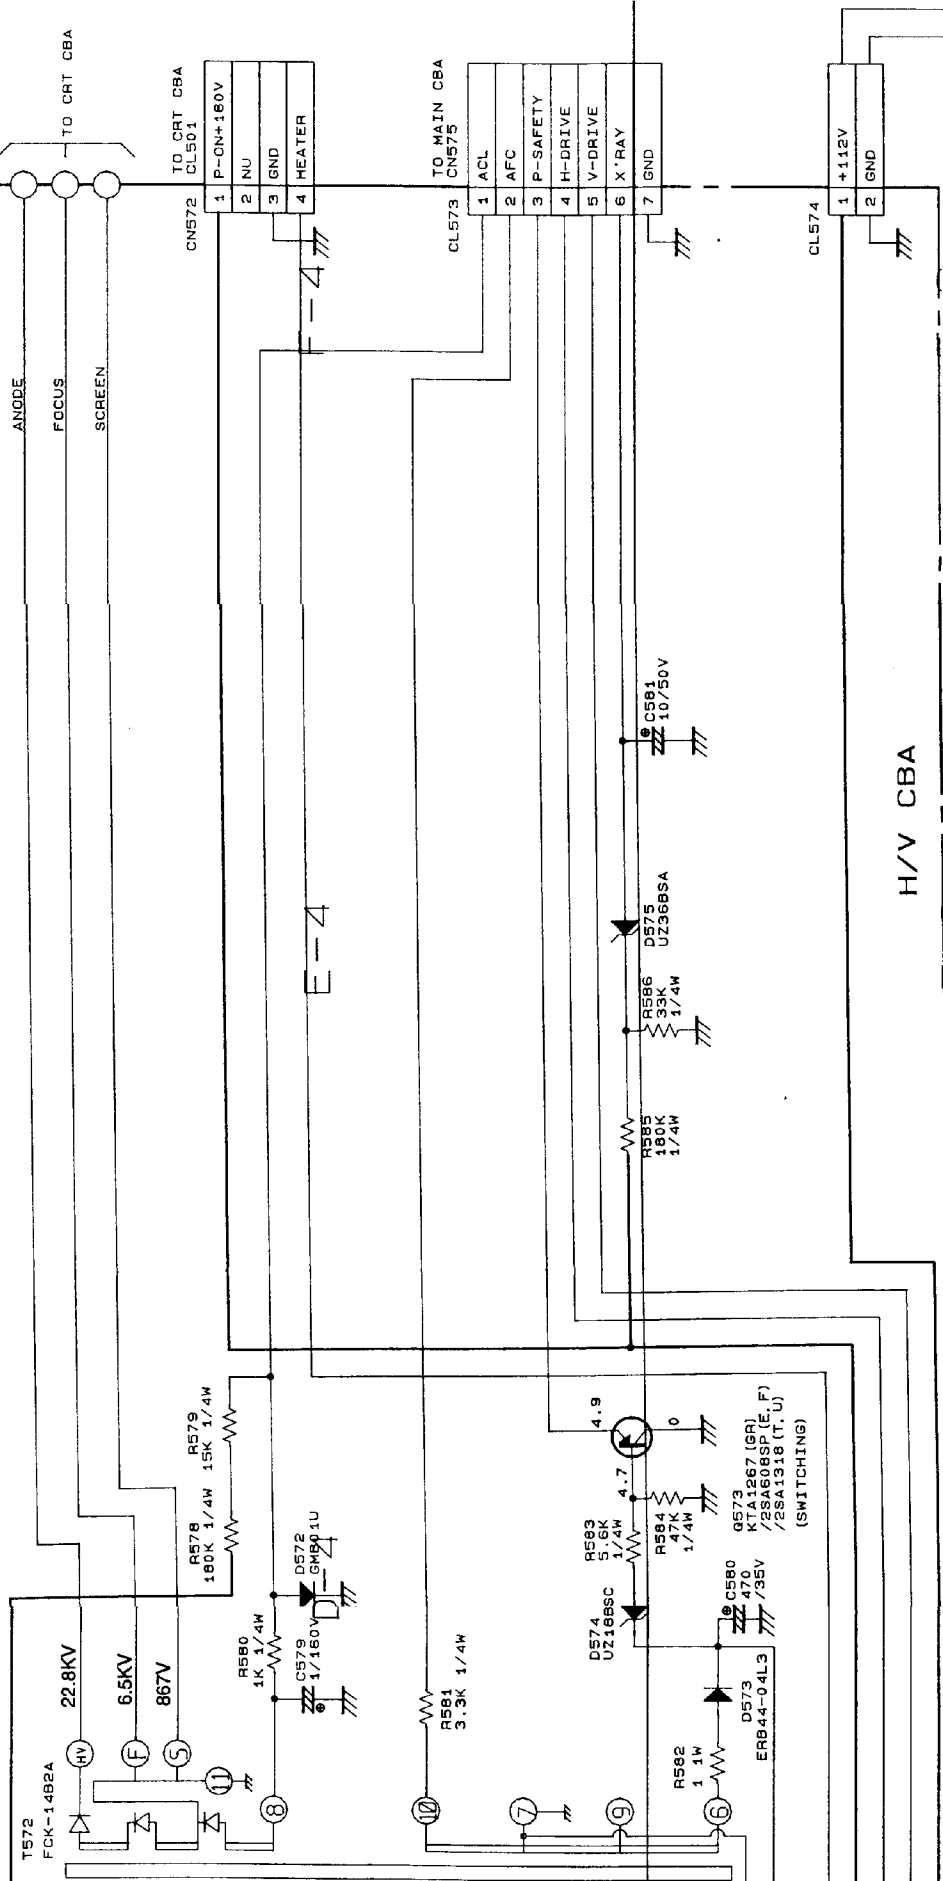


HOT

THE VOLTAGE FOR PARTS IN HOT CIRCUIT IS
MEASURED USING A HOT GND.

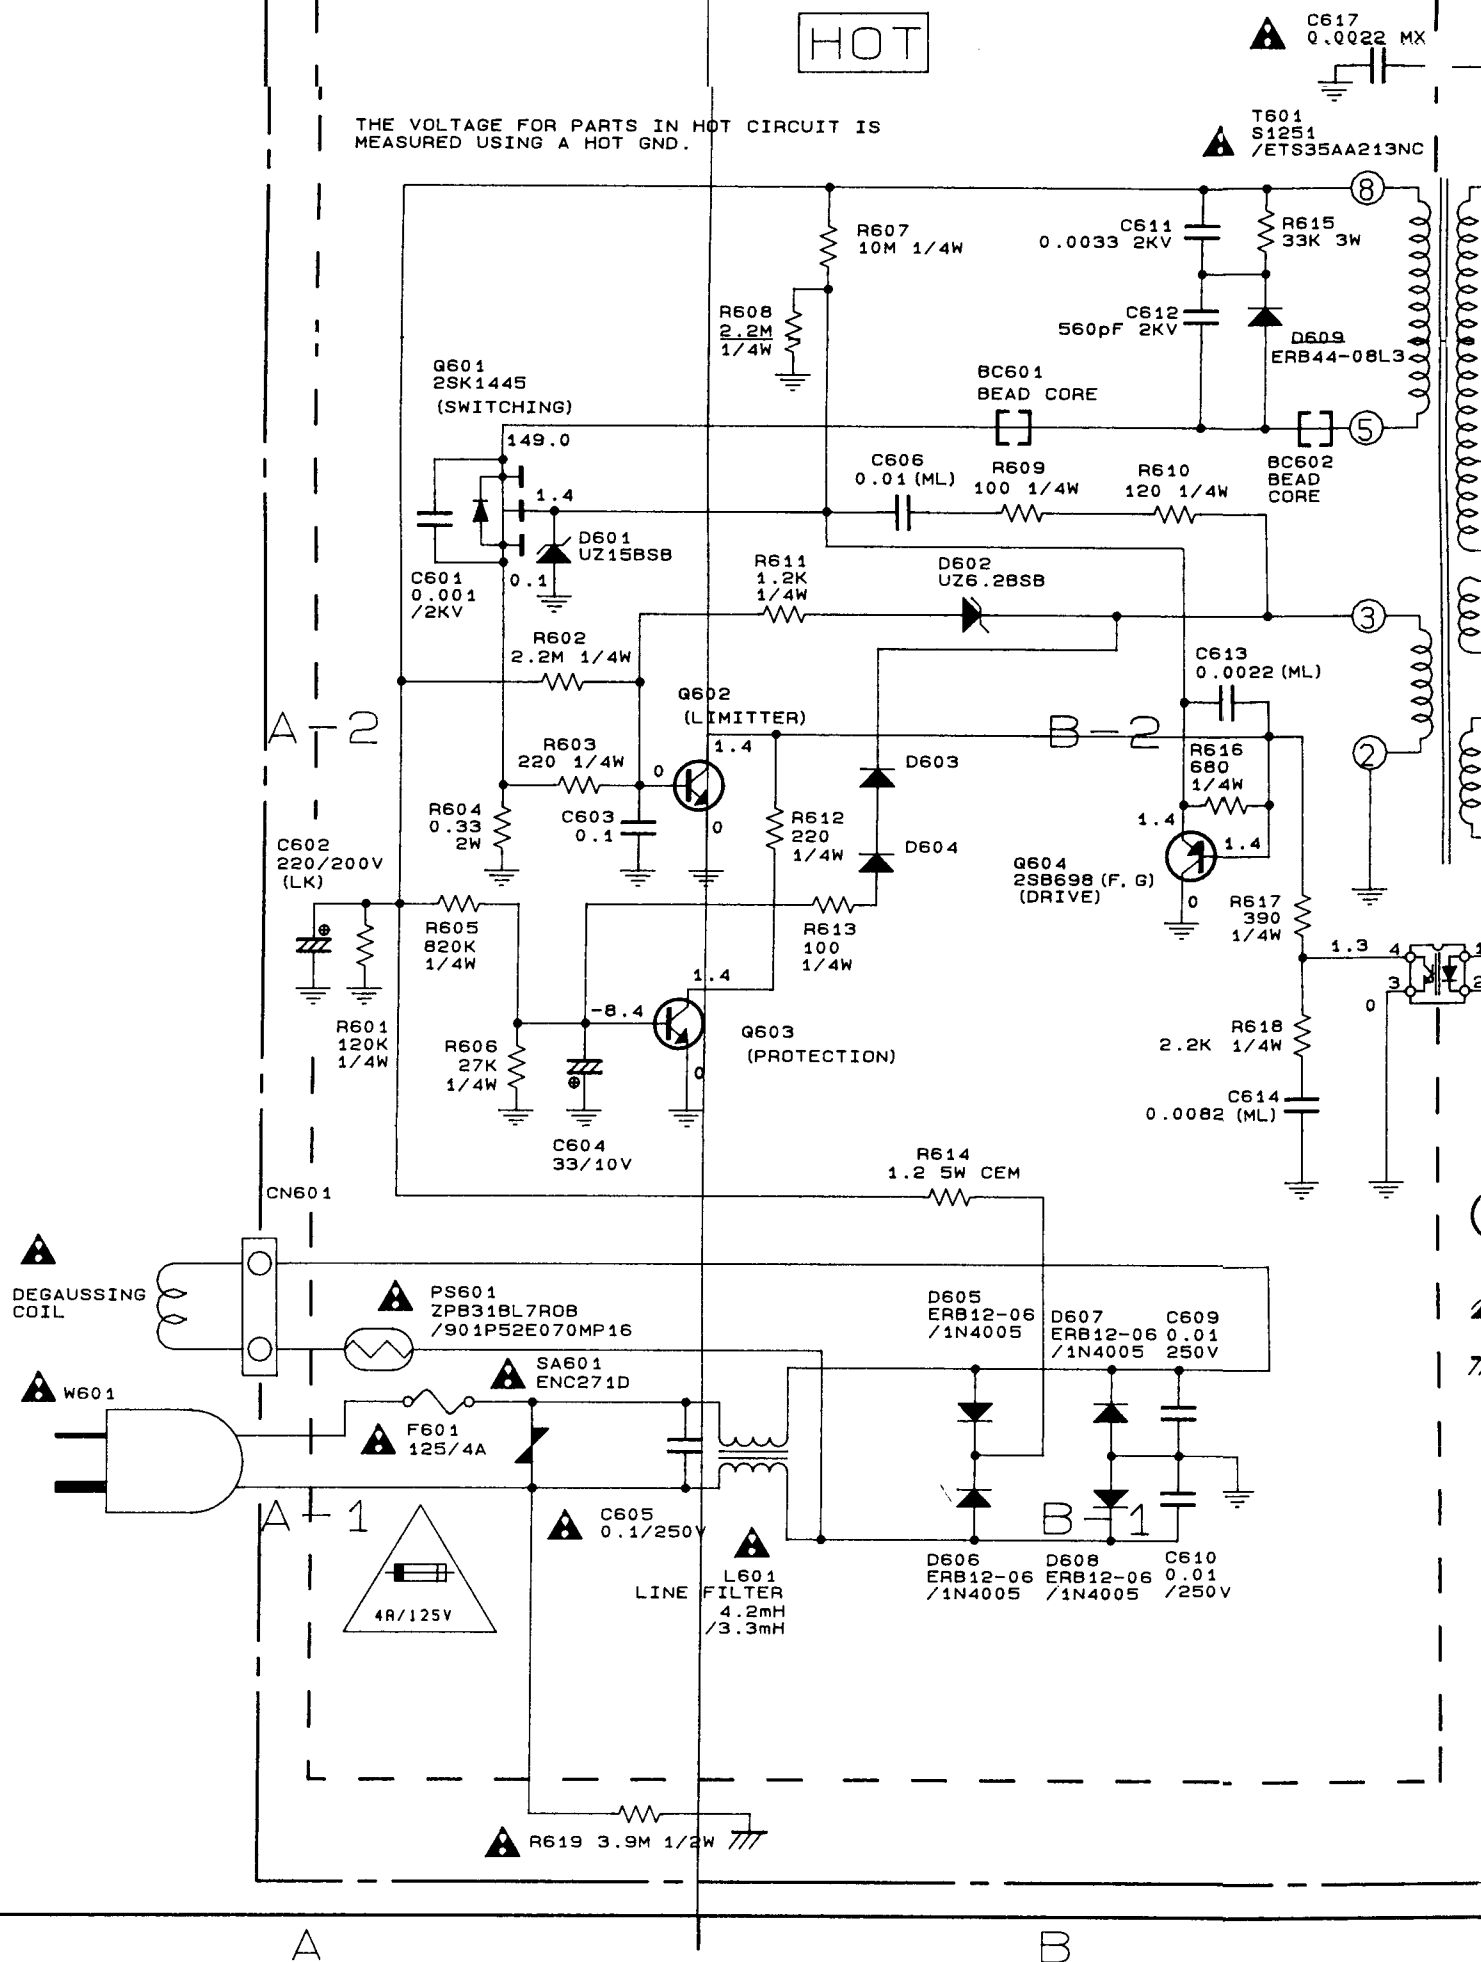

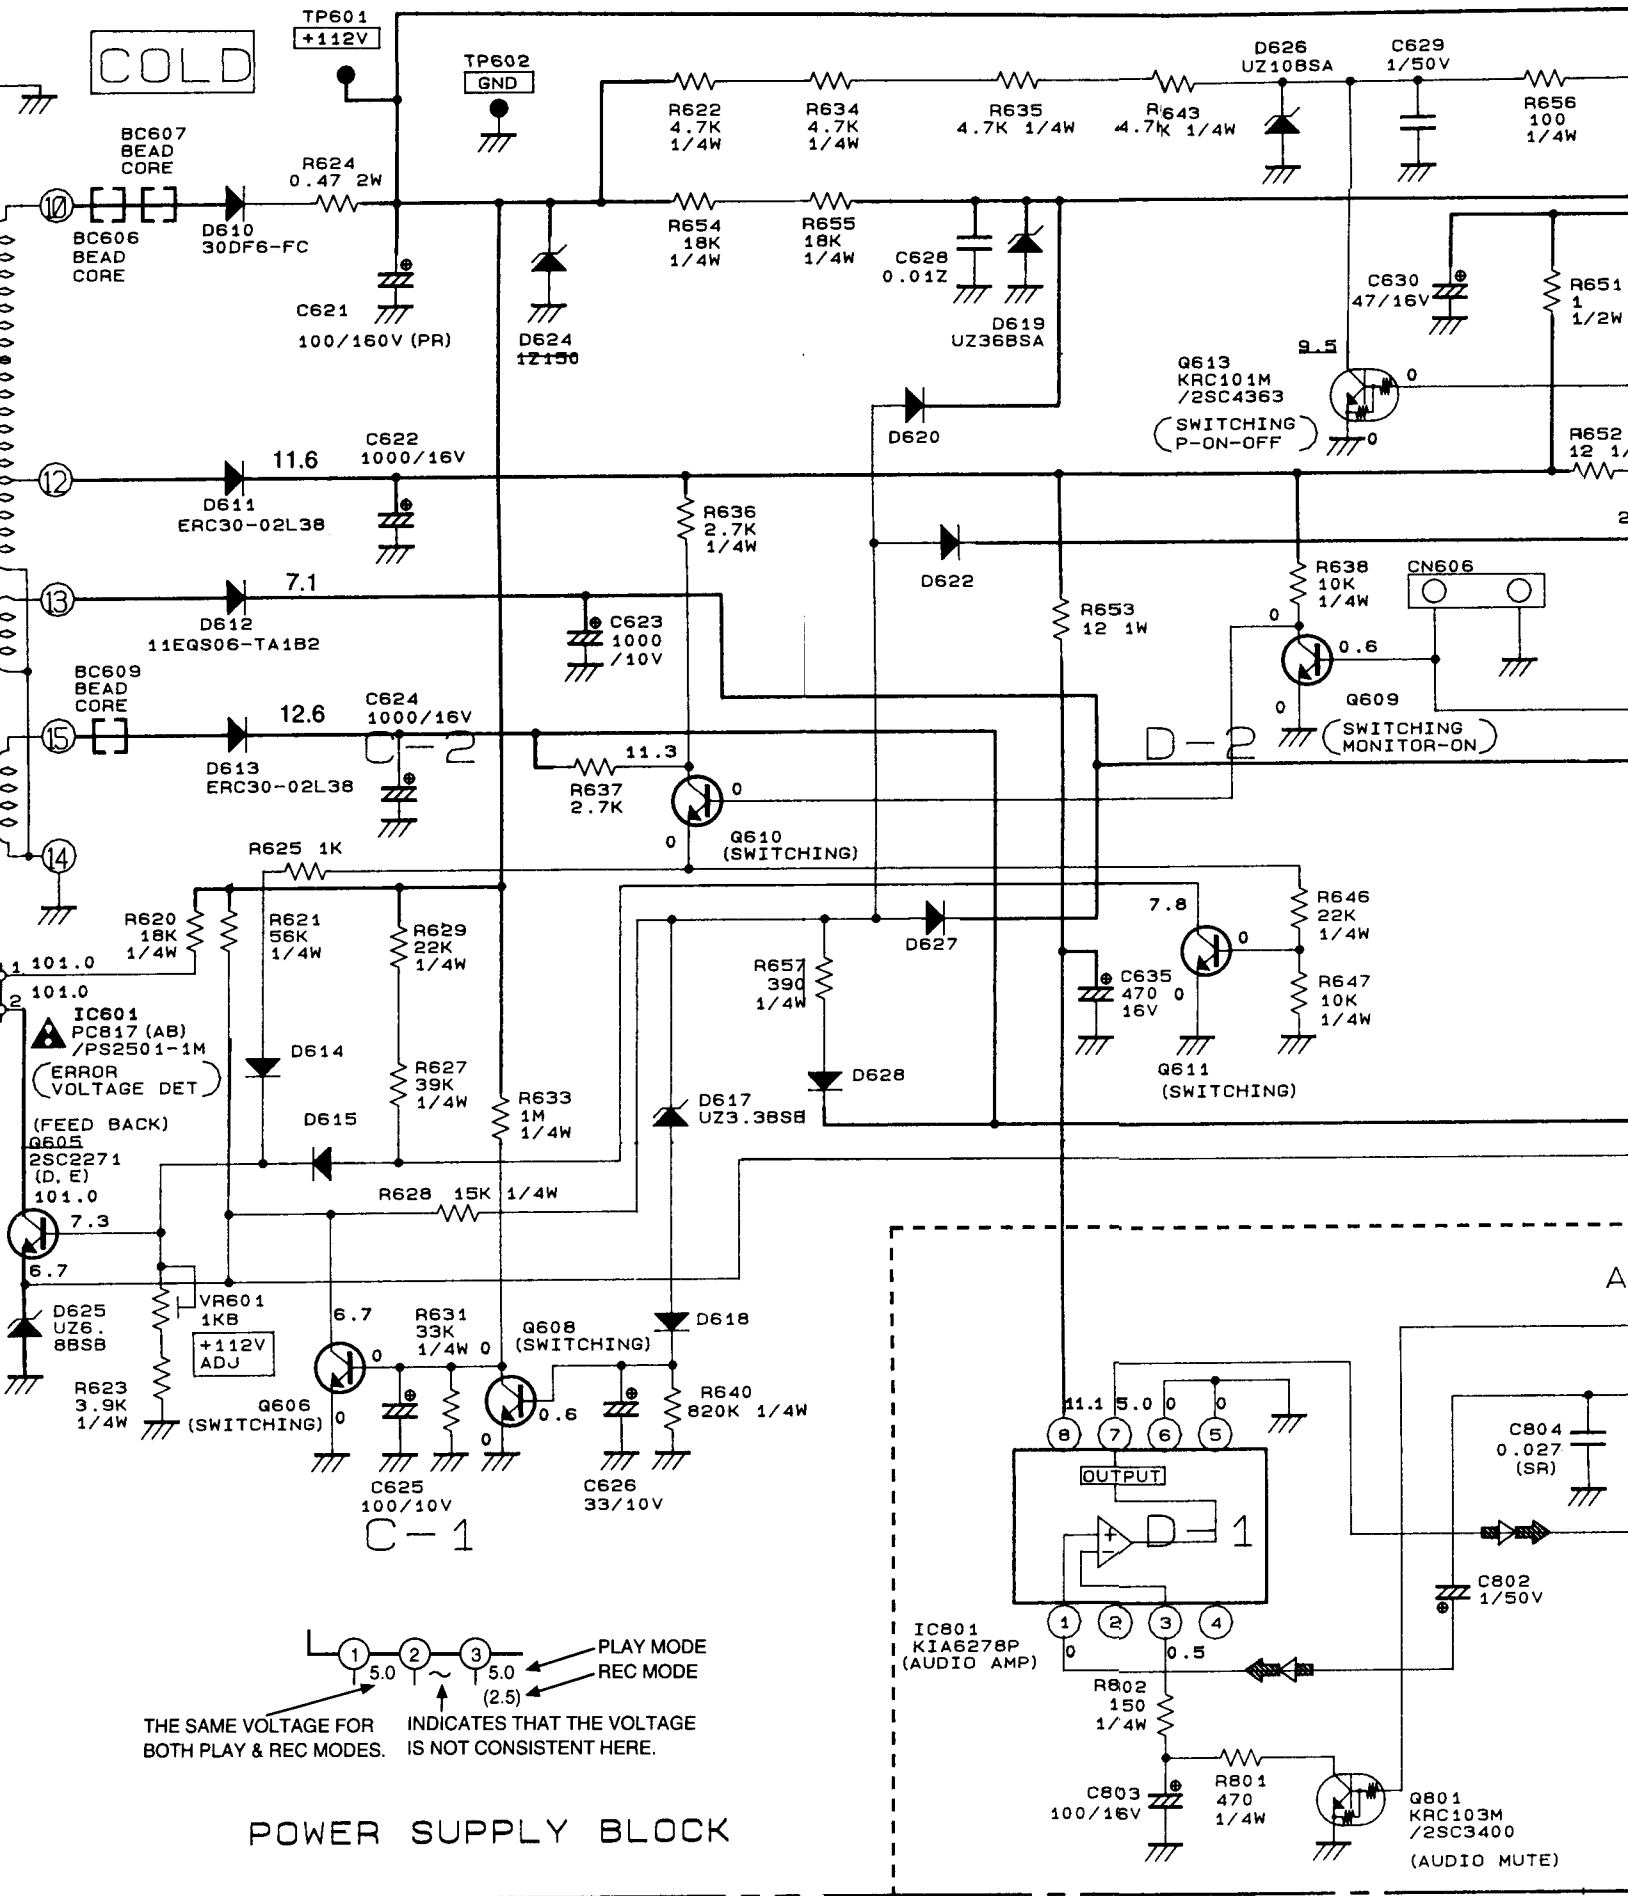

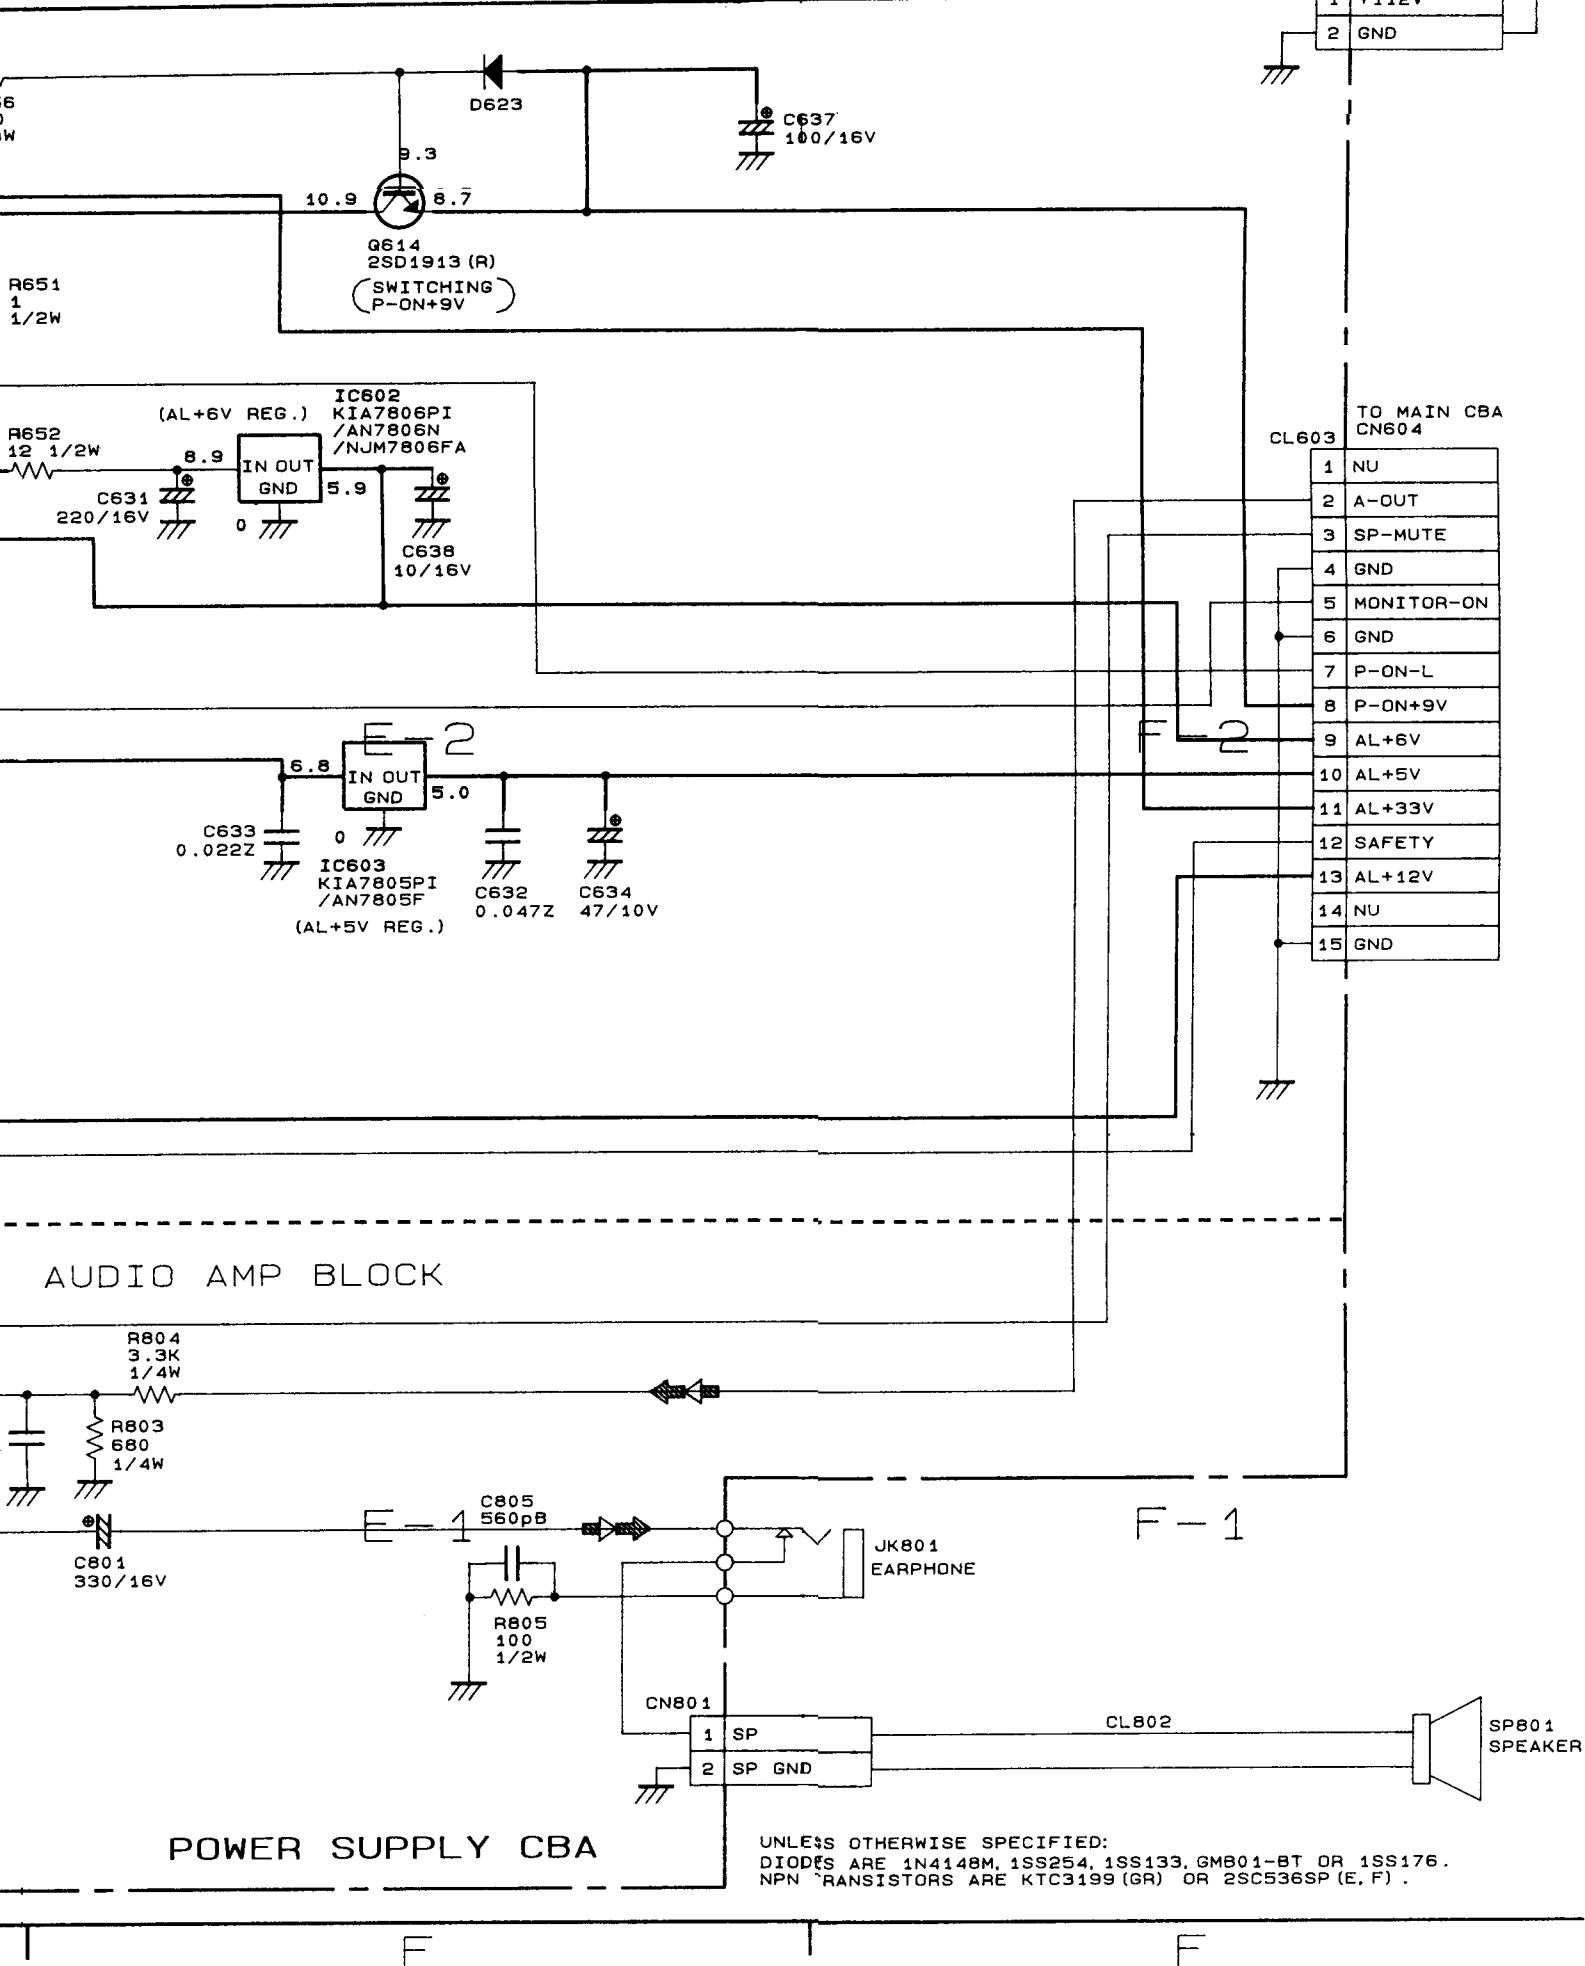

UNLESS OTHERWISE SPECIFIED:
 DIODES ARE 1N4148M, 1SS254, 1SS133, GMB01-BT OR 1SS176.
 NPN TRANSISTORS ARE KTC3199 (GR) OR 2SC536SP (E, F).

H/V
SCHEMATIC DIAGRAM
PARTS LOCATION GUIDE

Ref. No.	Position
ICS	
IC541	A-4
TRANSISTORS	
Q571	C-4
Q572	C-4
Q573	D-3
CONNECOTRS	
CN571	A-3
CN572	F-4
CL573	F-4
CL574	F-3
VARIABLE RESISTORS	
VR541	B-3

POWER SUPPLY
SCHEMATIC DIAGRAM
PARTS LOCATION GUIDE

Ref. No.	Position
ICS	
IC601	C-2
IC602	E-2
IC603	E-2
IC801	D-1
TRANSISTORS	
Q601	A-2
Q602	B-2
Q603	B-2
Q604	B-2
Q605	C-1
Q606	C-1
Q608	C-1
Q609	D-2
Q910	C-2
Q611	D-2
Q613	D-2
Q614	E-3
Q801	D-1
CONNECOTRS	
CN601	A-1
CN602	F-3
CL603	F-2
CN606	D-2
CN801	E-1
CL802	F-1
VARIABLE RESISTORS	
VR601	C-1
TEST POINTS	
TP601	C-3
TP602	C-3