

This file is provided FREE OF CHARGE from the
electromaniacs.com community

You are free to distribute this file to other persons
who needs it , but without of charge

Also on <http://electromaniacs.com> you can find
thousands of service manuals , schematics free of
charge



Service manual

59/68 Cm STEREO Color Television

CHASSIS : CP-785A

MODEL : DTE-25G5THS

DTE-29G5TH

FS-59T90

FS-68T90

DTE-25G4ZH

DTE-29G4ZH

FS-59V81

FS-68V81



NEC Corporation

September, 2002

Contents

1 - Main features	2
1-1 Specifications	2
1-2 External Terminals	2
1-3 Channel table	4
2 - Safety instruction	7
3 - Alignment instructions	8
3-1 Microcontroller configuration : Service mode	8
3-2 Microcontroller configuration : Option	8
3-3 TV set Alignment	10
4 - IC description	12
4-1 TDA936x TV signal processor - TXT with embedded μ -Controller	12
4-2 MSP34 Multistandard Sound Processor	19
4-3 TDA894x J Stereo Audio Amplifier	23
4-4 TDA835x J Vertical Amplifier	24
4-5 TDA6107Q	26
4-6 24C08 8 K bit EEPROM	27
4-7 STR-F665X	28
5 - Circuit description	30
5-1 Block diagram	30
5-2 IF	34
5-3 Source switching	35
5-4 μ -Controller I/O pin configuration and function	35
5-5 Sound processing	36
5-6 Sound amplification	37
5-7 Vertical deflection	38
5-8 Power supply (STR-F6654)	39
5-9 TV start-up, TV normal run and stand by mode operations	43
6 - Service parts list	50
6-1 PCB Difference Part (PCB change of FS-xxT90)	51
6-2 CRT Difference Part	59
6-3 Function & Cabinet Difference Part	60
6-4 All Electrical Parts List	61
7 - Compatible Components List for FS-xxT90, xxV81	
8 - Exploded view	83
9 - PCB Layout	84
9-1 Old Main PCB (4859804393)	85
9-2 New Main PCB (4859806493)	86
9-3 Control PCB (4859833214)	87
10 - Circuit Diagram	88
10-1 Old Main PCB	88
10-2 New Main PCB & Control PCB	89

1-1 Specifications

TV standard	PAL, - B/G, H
Sound system	NICAM B/G FM 2Carrier B/G
Power consumption	25" : 113W approx. 29" : 118W approx.
Sound Output Power	25" : 5W x 5W (at 60% mod, 10% THD) 29" : 5W x 5W (at 60% mod, 10% THD)
Speaker	25" : 7W 8 ohm x 2 29" : 7W 8 ohm x 2
Teletext system	10 pages memory FASTEXT (FLOF or TOP) : Option
Aerial input	75 ohm unbalanced
Channel coverage	Off-air channels, S-cable channels and hyperband
Tuning system	frequency synthesiser tuning system
Visual screen size	25" : 59 Cm 29" : 68 Cm
Channel indicatio	On Screen Display
Program Selection	100 programmes
Aux. terminal	INPUT1(SCART or RCA) - SCART : Audio / Video In, S-VHS In(with cable) - RCA : Audio / Video In. (SVHS : disable) INPUT2(RCA) : Audio / Video In OUTPUT(RCA) : TV OUT Headphone jack (3.5 mm) on front of cabinet
Remote Control Unit	R-44N08(RD-D90) for with Teletext R-44N09(RD-085) for with Teletext

1-2 External Teminals**1-2-1 Input 2 : Rear RCA**

Pin	Signal	Matching value
1(Yellow)	Video Input	1.0 Vpp+/- 3dB, Impedance 75 ohm
2(White)	Audio Input Left	0.5 Vrms, Impedance > 10k ohm
3(Red)	Audio Input Right	0.5 Vrms, Impedance > 10k ohm

1-2-2 Output : Rear RCA

Pin	Signal	Matching value
1(Yellow)	TV Video	1.0 Vpp+/- 3dB, Impedance 75 ohm
2(White)	TV Audio Left	0.5 Vrms at RF Sound FM 54%Mod.(27kHz dev.)
3(Red)	TV Audio Right	0.5 Vrms at RF Sound FM 54%Mod.(27kHz dev.)


1-2-3 Input1 : Rear RCA or Scart

-RCA Jack : Input1 (S-VHS not available)

Pin	Signal	Matching value
1(Yellow)	Video Input	1.0 Vpp+/- 3dB, Impedance 75 ohm
2(White)	Audio Input Left	0.5 Vrms, Impedance > 10k ohm
3(Red)	Audio Input Right	0.5 Vrms, Impedance > 10k ohm

- SCART (21pin Euro Scart) : Input1 & S-VHS input

Pin	Signal	Matching value
1	N.C.	
2	Audio Input Right	0.5 Vrms, Impedance > 10 k Ω
3	N.C.	
4	Audio Earth	
5	Earth	
6	Audio Input Left	0.5 Vrms, Impedance > 10 k Ω
7	N.C.	
8	N.C.	
9	N.C.	
10	N.C.	
11	N.C.	
12	N.C.	
13	N.C.	
14	Earth	
15	Chroma Input	+/- 3dB for a luminance signal of 1 Vpp
16	N.C.	
17	Earth	
18	Video In Earth	
19	N.C.	
20	Video Input / Y Input	1 Vpp +/- 3dB, Impedance 75 ohm
21	Common Earth	

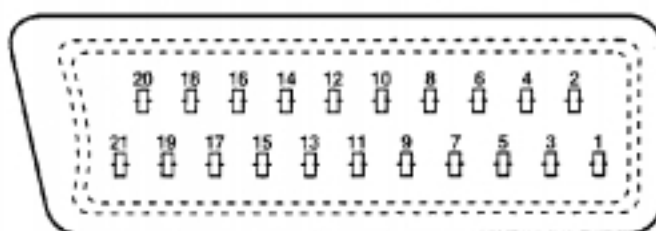

1-3 Channel table

FREQUENCY TABLE CP-785A

CH	AUSTRALIA	N/Z 'land		
C00	46.25			
C01	57.25			
C02	64.25			
C03	86.25			
C04	95.25			
C05	102.25			
C5A	138.25			
C06	175.25			
C07	182.25			
C08	189.25			
C09	196.25			
C10	209.25			
C11	216.75			
N01	-	45.25		
N02	-	55.25		
N03	-	62.25		
N08	-	203.25		
N09	-	210.25		
N10	-	217.25		
-	-	-		
C21	471.25			
C22	479.25			
C23	487.25			
C24	495.25			
C25	503.25			
C26	511.25			
C27	519.25			
C28	527.25			
C29	534.25			
C30	541.25			
C31	548.25			
C32	555.25			
C33	562.25			
C34	569.25			
C35	576.25			
C36	583.25			
C37	590.25			
C38	597.25			
C39	603.25			
C40	610.25			
C41	617.25			
C42	624.25			

CH	AUSTRALIA	N/Z 'land		
C43	631.25			
C44	638.25			
C45	645.25			
C46	652.25			
C47	659.25			
C48	666.25			
C49	673.25			
C50	680.25			
C51	687.25			
C52	694.25			
C53	701.25			
C54	708.25			
C55	715.25			
C56	722.25			
C57	729.25			
C58	736.25			
C59	743.25			
C60	750.25			
C61	757.25			
C62	764.25			
C63	771.25			
C64	779.25			
C65	786.25			
C66	793.25			
C67	800.25			
C68	807.25			
C69	814.25			
C70	-			
C71	-			
C72	-			
C73	-			
C74	-			
C75	-			
C76	-			
C77	-			
S01	105.25			
S02	112.25			
S03	119.25			
S04	126.25			
S05	133.25			
S06	140.25			
S07	147.25			
S08	154.25			
S09	161.25			
S10	168.25			
S11	231.25			

CH	AUSTRALIA	N/Z 'land		
S12	238.25			
S13	245.25			
S14	252.25			
S15	259.25			
S16	266.25			
S17	273.25			
S18	280.25			
S19	287.25			
S20	294.25			
S21	303.25			
S22	311.25			
S23	319.25			
S24	327.25			
S25	335.25			
S26	343.25			
S27	351.25			
S28	359.25			
S29	367.25			
S30	375.25			
S31	383.25			
S32	391.25			
S33	399.25			
S34	407.25			
S35	415.25			
S36	423.25			
S37	431.25			
S38	439.25			
S39	447.25			
S40	455.25			
S41	463.25			

2 - Safety instruction

WARNING: Only competent service personnel may carry out work involving the testing or repair of this equipment.

X-RAY RADIATION PRECAUTION

1. Excessive high voltage can produce potentially hazardous X-RAY RADIATION. To avoid such hazards, the high voltage must not exceed the specified limit. The nominal value of the high voltage of this receiver is 26~28 KV (25" - 29") at max beam current. The high voltage must not under any circumstances, exceed 29.5 KV (25") or 31 KV (29"). Each time a receiver requires servicing, the high voltage should be checked. It is important to use an accurate and reliable high voltage meter.
2. The only source of X-ray Radiation in this TV receiver is the picture tube. For continued X-ray RADIATION protection, the replacement tube must be exactly the same type tube as specified in the parts list.

SAFETY PRECAUTION

1. Potentials of high voltage are present when this receiver is operating. Operation of the receiver outside the cabinet or with the back board removed involves a shock hazard from the receiver.
 - 1) Servicing should not be attempted by anyone who is not thoroughly familiar with the precautions necessary when working on high voltage equipment.
 - 2) Discharge the high potential of the picture tube before handling the tube. The picture tube is highly evacuated and if broken, glass fragments will be violently expelled.
2. If any Fuse in this TV receiver is blown, replace it with the FUSE specified in the Replacement Parts List.
3. When replacing a high wattage resistor (oxide metal film resistor) in circuit board, keep the resistor 10 mm away from circuit board.
4. Keep wires away from high voltage or high temperature components.
5. This receiver must operate under AC 240 volts, 50 Hz. NEVER connect to DC supply or any other power or frequency.

PRODUCT SAFETY NOTICE

Many electrical and mechanical parts in this equipment have special safety-related characteristics. These characteristics are often passed unnoticed by a visual inspection and the X-ray Radiation protection afforded by them cannot necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in this manual and its supplements, electrical components having such features are identified by designated symbol on the parts list. Before replacing any of these components, read the parts list in this manual carefully. The use of substitutes replacement parts which do not have the same safety characteristics as specified in the parts list may create X-ray Radiation.

3 - Alignment instructions

3-1 Microcontroller configuration : Service mode

To switch the TV set into service mode please see instruction below.

- 1 - Select pr. number 91
- 2 - Adjust sharpness to minimum value and exit all menu.
- 3 - Quickly press the key sequence : RED - GREEN - menu

To exit SERVICE menu press menu key or Operate(Std By) key.

In Service Mode press "OK" to stop the microcontroller i.e. the I2C bus is free and the set can be controlled by external equipment. Press "OK" again to allow the microcontroller to control the set again.

3-2 Microcontroller configuration : Option

Section	Items	BareDATA	29 "		25 "		21 "	REMARK
			G5TH	G4ZH	G5THS	G4ZH		
For Adjustment (Variable)	AGC	32	38	38	38	38	38	
	BIAS R/G	31/31	31/31	31/31	31/31	31/31	31/31	old micom : 8/8
	DRIVE R/G/B	32/32/32	32/32/28	32/32/28	32/32/32	32/32/32	32/32/32	
	H-PARALLEL	31	36	36	32	32	32	
	H-BOW	42	34	34	35	35	35	
	H-SHIFT	25	30	30	30	30	27	
	V-SLOPE	32	35	35	35	35	35	
	V-Amplitude	39	19	19	30	30	27	
	V. S-Correction	13	27	27	25	25	23	
	V SHIFT	32	34	34	34	34	45	
	H-WIDTH	32	37	37	57	57	33	
	EW Parabola	32	20	20	17	17	0	
	Up-Conner	32	32	32	42	42	32	
	Dn-Conner	32	32	32	42	42	32	
	EW Trapezium	32	29	29	31	31	29	
For Function Change (OPTION)	Option	04	04	04	04	04	04	0,1,2,3 : For D/W Remote controller 4,5,6,7 : For NEC Remote controller "
	CH Lock or HOTEL Lock	OFF	OFF	OFF	OFF	OFF	OFF	"Hotel Lock" will be changed to "CH Lock"
	HOTEL Max Vol or Max VOL	15	43	43	43	43	43	"Hotel Max Vol" will be changed to "Max Vol"
	Colck Pr.	01	07	07	07	07	07	change the reference channel for Automatic clock setting
	SVHS	ON	ON	OFF	ON	OFF	OFF	OFF : disable S-VHS Input
	AV START	OFF	OFF	OFF	OFF	OFF	OFF	"AV START" is add
	KEY LOCK	OFF	OFF	OFF	OFF	OFF	OFF	"KEY LOCK" is add
	SCREEN	24	31	31	33	33	35	each CRT has different Adjusting point

Change of Lock Function

(1) Model

- New AV Stereo Model (FS-xxV81, DTE-xxG4ZH) will be applied the new lock function from 1st MP.
- Current Model (FS-xxT90, DTE-xxG5THx) will be changed to new lock function when the CPU software is changed (TDA9365 : DW9365-CH1 ==> DW9365-CH2)

(2) Details

Lock Function Name		Description	Applied Models	CPU Version	Remark
Current Lock Function	Hotel Lock	<ul style="list-style-type: none"> - Channel Setting : Enable / Disable - Volume Limit (Hotel Max Vol) : Enable / Disable - When this function is active, It is impossible to change the channel data (can not enter the INSTALL menu) & the sound can be limited by " Hotel Max Vol " . 	FS-59T90 FS-68T90 PF51T31	DW9365-CH1	These current Lock function will be change to New Lock Function.
	Hotel Max. Volume	<ul style="list-style-type: none"> - This Function is available When " Hotel Lock " is on (This function is depend on Hotel Lock Function) - When Hotel Lock is off, the sound dose not limited. 			
New Lock Function	CH Lock	<ul style="list-style-type: none"> - Channel Setting : Impossible / Possible - The former " Hotel mode " has been removed and added " CH lock " - When this function is active, It is impossible to change the channel data (can not enter the INSTALL menu) 	FS-59V81 FS-68V81		<ul style="list-style-type: none"> - Each Lock Function is independence - It is possible to change the features by combination of each function - We will apply these new lock function to current TEXT micom.
	Max Vol	<ul style="list-style-type: none"> - Max Volume is limited. - Even if " CH lock " is not active the sound can be limited by the service function " Max Vol " . - In case of virgin EEPROM, the default setting is 43 (Max). - In normal, the " Max. Vol. " must be 43 	(FS-59T90) (FS-68T90) (PF51T31)	DW9365-CH2 DW9385-CH1	<ul style="list-style-type: none"> - Example) CH lock=ON, Max Vol=20 ==> CH setting = Disable Volume Limit : under 20 Max. Vol=20, AV start=ON, Key Lock=ON ==> Volume Limit : under 20 Tv is always turn on at AV1 mode Front local keys are not operate
	AV Start	<ul style="list-style-type: none"> - When " VA start " is active, the set always start in AV1 mode (main AC switch on/off & remote controller on/off). - In case of virgin EEPROM, the default setting is OFF. 			
	Key Lock	<ul style="list-style-type: none"> - When active the local keyboard cannot be used. - In case of virgin EEPROM, the default setting is OFF. 			

* Note : These Function is changed only Service Mode not Factory mode . So you must use the user 's remote controller

- Change the PR. No. to 91 ==> change the sharpness to 00(min) in Picture control Menu ==> Exit the User control Menu ==> Press the [RED],[GREEN],[MENU] quickly
- Then the Service Menu is appeared.

3-3 TV set Alignment

3-3-1 - G2 alignment

- TV in AV mode without video signal → Black screen.
- TV preset with WP Red, WP Green and WP Blue equal to 32.
- TV preset with Black R, Black G equal to 32.
- Set TV in NORMAL I mode
- Adjust screen volume (on FBT) such that the highest cathod cut-off voltage measured on CRT board, is V cut off $\pm 5V$.

Screen size	Vcut-off
25"	140V
29"	140V

3-3-2 - White balance


- Select a dark picture and adjust Black G and Black R to the desired colour temperature.
- Select a bright picture and adjust WP Red, WP Green, WP Blue to the desired colour temperature.

3-3-3 - Focus

- Adjust the Focus volume (on FBT) to have the best resolution on screen.

3-3-4 - Vertical geometry

- Adjust the Vertical Amplitude, Shift, S-Correction and Slope to compensate for vertical distortion.

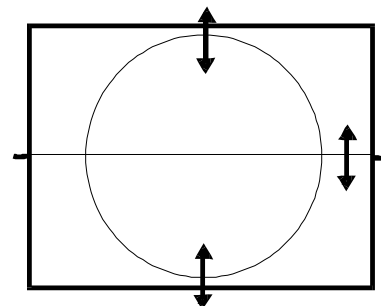


3-3-5 - Horizontal picture centering


- Adjust H Shift to have the picture in the center of the screen.

3-3-6 - East / West correction


- Adjust the H Parall, H Bow, H Width, EW Parabo, Up Corner, Dw Corner, EW trapez to compensate for geometrical distortion.

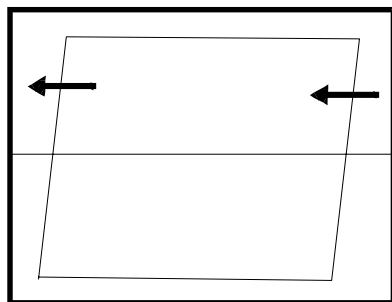


H. Parall

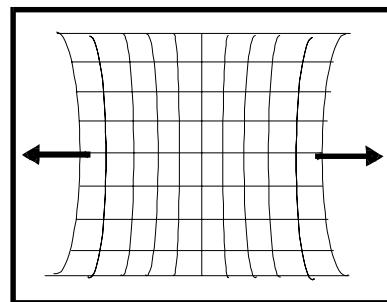


EW.Parabola

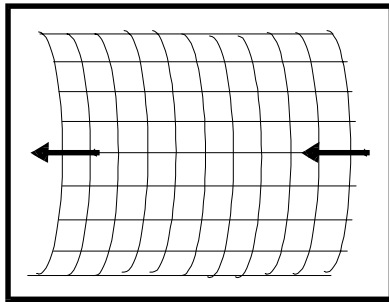


H. Bow

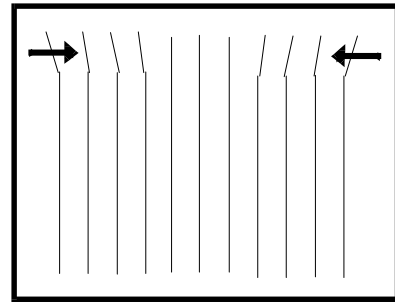

Up Corner

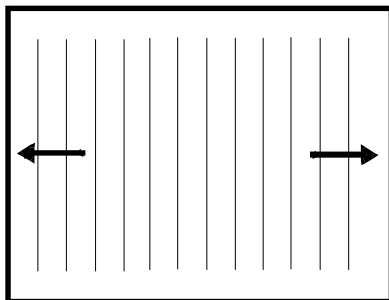

H. Width

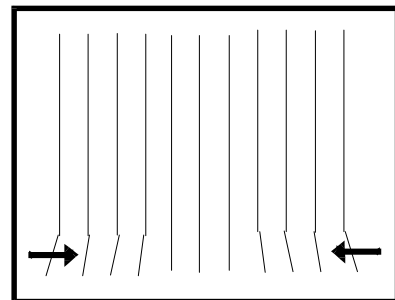

Dw Corner

3-3-7 - AGC

- Adjust the antenna signal level at 68 dBV 2 (UHF - CH25)
- Set RF AGC to 0.
- Increase RF AGC level and stop when the level on pin 6 of TDA936x goes below 2.5 Vdc

4 - IC description

4-1 TDA936x TV signal processor - Teletext decoder with embedded -Controller.

- TDA936x : TEXT Available
- TDA938x : TEXT Not Available

CHASSIS(MODELS)	IC MARKING	TEXT	TV STANDARD	Version History
CP-785A, AF (DTE-xxxxTHx) (FS-XXT90,PF-51T31)	TDA9365 (DW9365/N2-CH1)	10 PAGE TEXT (Pan-Eur opeun)	PLA/SECAM	TDA-9365/N1(otp) TDA9365/N2-H:DW9365-CH(Masking) TDA9365/N2-I : DW9365-CH2(Masking)
CP-785A (DTE-xxxxZH) (FS-xxV81)	TDA9385 -OTP : TDA9385/N2/I -Masking : TDA9385/N2/I DW9385/N2/-I-CH1	Not USED	PAL	TDA9385/N2-I : DW9385-CH1

TV-signal Processor

- Multi-standard vision IF circuit with alignment-free PLL demodulator
- Internal (switchable) time-constant for the IF-AGC circuit
- Source selection between 'Internal' CVBS and external CVBS or Y/C signals
- Integrated chrominance trap circuit
- Integrated luminance delay line with adjustable delay time
- Asymmetrical ' delay line type' peaking in the luminance channel
- Black stretching for non-standard luminance signals
- Integrated chroma band-pass filter with switchable centre frequency
- Only one reference (12 MHz) crystal required for the -Controller, Teletext and the colour decoder
- PAL / NTSC or multistandard colour decoder with automatic search system
- Internal base-band delay line
- RGB control circuit with 'Continuous Cathode Calibration', white point and black level off set adjustment so that the colour temperature of the dark and the bright parts of the screen can be chosen independently.
- The Text/OSD signals are internally supplied from the -Controller/Teletext decoder
- Contrast reduction possibility during mixed-mode of OSD and Text signals
- Horizontal synchronisation with two control loops and alignment-free horizontal oscillator
- Vertical count-down circuit
- Vertical driver optimised for DC-coupled vertical output stages
- Horizontal and vertical geometry processing
- Horizontal and vertical zoom function for 16 : 9 applications
- Horizontal parallelogram and bow correction for large screen picture tubes

μ-Controller

- 80C51 μ-controller core standard instruction set and timing
- 1 μs machine cycle
- 32 - 128Kx8-bit late programmed ROM
- 3 - 12Kx8-bit Auxiliary RAM (shared with Display and Acquisition)
- Interrupt controller for individual enable/disable with two level priority
- Two 16-bit Timer/Counter registers
- WatchDog timer
- Auxiliary RAM page pointer
- 16-bit Data pointer
- IDLE and Power Down (PD) mode
- 14 bits PWM for Voltage Synthesis Tuning
- 8-bit A/D converter
- 4 pins which can be programmed as general I/O pin, ADC input or PWM (6-bit) output

Data Capture

- Text memory 10 pages
- Inventory of transmitted Teletext pages stored in the Transmitted Page Table (TPT) and Subtitle Page Table (SPT)
- Data Capture for US Closed Caption
- Data Capture for 525/625 line WST, VPS (PDC system A) and Wide Screen Signalling (WSS) bit
- decoding Automatic selection between 525 WST/625 WST
- Automatic selection between 625 WST/VPS on line 16 of VBI
- Real-time capture and decoding for WST Teletext in Hardware, to enable optimised -processor throughput
- Automatic detection of FASTEXT transmission
- Real-time packet 26 engine in Hardware for processing accented, G2 and G3 characters
- Signal quality detector for video and WST/VPS data types
- Comprehensive teletext language coverage
- Full Field and Vertical Blanking Interval (VBI) data capture of WST data

Display

- Teletext and Enhanced OSD modes
- Features of lever 1.5 WST and US Close Caption
- Serial and Parallel Display Attributes
- Single/Double/Quadruple Width and Height for characters
- Scrolling of display region
- Variable flash rate controlled by software
- Enhanced display features including overlining, underlining and italics
- Soft colours using CLUT with 4096 colour palette
- Globally selectable scan lines per row (9/10/13/16) and character matrix [12x10, 12x13, 12x16 (VxH)]
- Fringing (Shadow) selectable from N-S-E-W direction
- Fringe colour selectable
- Meshing of defined area

- Contrast reduction of defined area
- Cursor
- Special Graphics Characters with two planes, allowing four colours per character
- 32 software redefinable On-Screen display characters
- 4 WST Character sets (GO/G2) in single device (e.g. Latin, Cyrillic, Greek, Arabic)
- G1 Mosaic graphics, Limited G3 Line drawing characters
- WST Character sets and Closed Caption Character set in single device


Data Capture

The Data Capture section takes in the analogue Composite Vidéo and Blanking Signal (CVBS), and from this extracts the required data, which is then decoded and stored in memory.

The extraction of the data is performed in the digital domain. The first stage is to convert the analogue CVBS signal into a digital form. This is done using an ADC sampling at 12MHz. The data and clock recovery is then performed by a Multi-Rate Video Input Processor (MuVIP). From the recovered data and clock the following data types are extracted WST Teletext (625/525), Closed Caption, VPS, WSS. The extracted data is stored in either memory (DRAM) via the Memory Interface or in SFR locations.

Data Capture Features


- Video Signal Quality detector
- Data Capture for 625 line WST
- Data Capture for 525 line WST
- Data Capture for US Closed Caption
- Data Capture for VPS data (PDC system A)
- Data Capture for Wide Screen Signalling (WSS) bit decoding
- Automatic selection between 525 WST/625WST
- Automatic selection between 625WST/VPS on line 16 of VBI
- Real-time capture and decoding for WST Teletext in Hardware, to enable optimised microprocessor throughput
- 10 pages stored On-Chip
- Inventory of transmitted Teletext pages stored in the Transmitted Page Table (TPT) and Subtitle Page Table (SPT)
- Automatic detection of FASTEXT transmission
- Real-time packet 26 engine in Hardware for processing accented, G2 and G3 characters
- Signal quality detector for WST/VPS data types
- Comprehensive Teletext language coverage
- Full Field and Vertical Blanking Interval (VBI) data capture of WST data

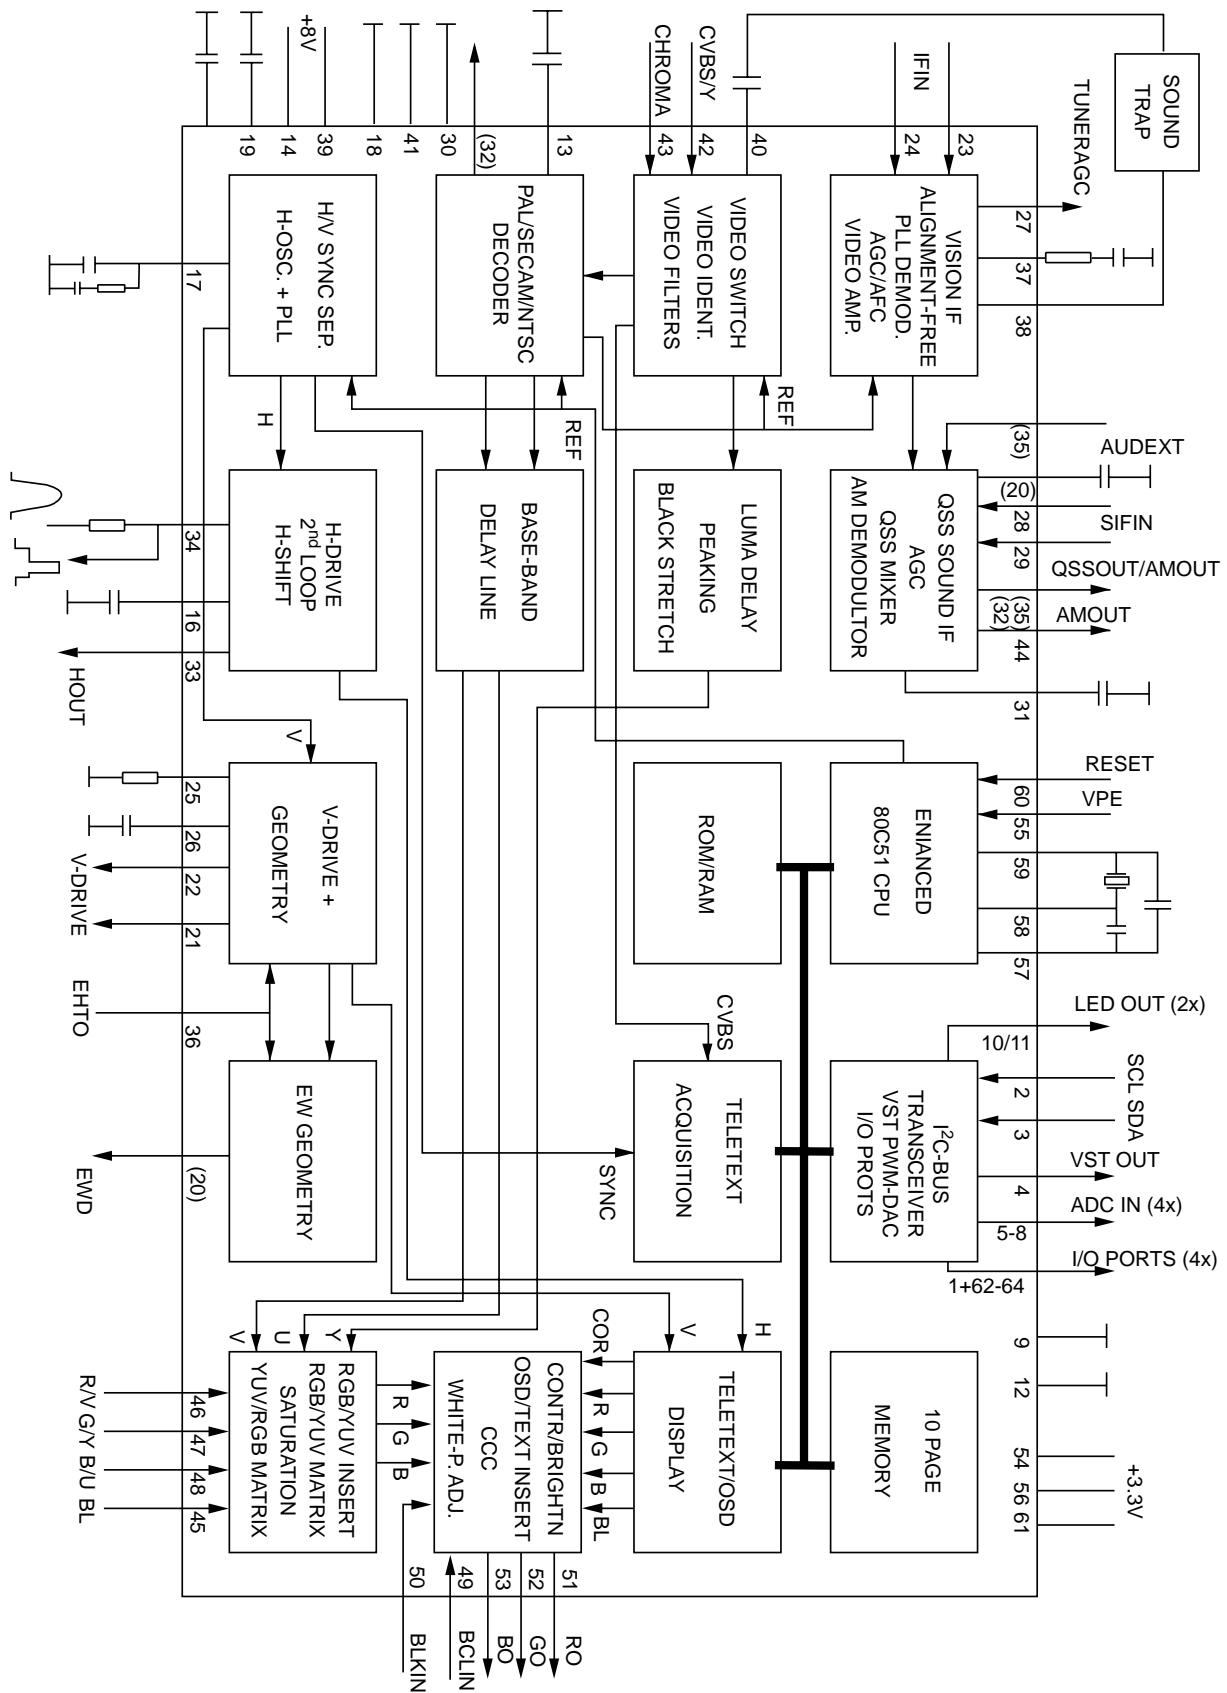

PINNING

SYMBOL	PIN	DESCRIPTION
n.u.	1	Port 1.3 Not used.
SCL	2	I2C bus clock line
SDA	3	I2C Data line
SECAM L 'out	4	Port 2.0 : High when L selected (PushPull)
OCP	5	Port 3.0 : Over Current Protection
RF AGC in	6	ADC 1 : For factory use only (High impedance)
Key-in	7	ADC 2 : local key input (High impedance)
S/SW	8	ADC 3 : Scart Slow switching input
VssC/P	9	digital ground for -controller core and peripheral
LED 1	10	port 0.5 (8mA current sinking capability)
LED 2	11	port 0.6 (8mA current sinking capability)
VSSA	12	analog ground of teletext decoder and digital ground of TV processor
SEC PLL	13	SECAM PLL decoupling
VP2	14	2nd supply voltage TV-processor
DECDIG	15	decoupling digital supply of TV-processor
PH2LF	16	phase-2 filter
PH1LF	17	phase-1 filter
GND3	18	ground 3 for TV-processor
DECBG	19	bandgap decoupling
AVL/EWD	20	East / West drive output
VDRB	21	vertical drive B output
VDRA	22	vertical drive A output
IFIN1	23	IF input 1
IFIN2	24	IF input 2
IREF	25	reference current input
VSC	26	vertical sawtooth capacitor
TUNERAGC	27	tuner AGC output
SIFIN1	28	SIF input 1
SIFIN2	29	SIF input 2
GND2	30	ground 2 for TV processor
SIF AGC	31	AGC sound IF
REF0	32	n.u.
HOUT	33	horizontal output
FBISO	34	flyback input / sandcastle output
QSS out	35	QSS intercarrier output
EHT0	36	EHT/Overvoltage protection
PLLIF	37	IF PLL loop filter
IFVO	38	IF video output
VP1	39	main supply voltage TV-processor
CVBSINT	40	internal CVBS input
GND1	41	ground 1 for TV-processor
CVBS/Y	42	external CVBS/Y input
CHROMA	43	chrominance input (SVHS)
AMOUT	44	n.u.
INSSW2	45	2nd RGB insertion input
R2IN	46	2nd R input

SYMBOL	PIN	DESCRIPTION
G2IN	47	2nd G input
B2IN	48	2nd B input
BCLIN	49	beam current limiter input
BLKIN	50	black current input
R0	51	RED Output
G0	52	GREEN Output
B0	53	BLUE Output
VDDA	54	analog supply of Teletext decoder and digital supply of TV-Processor (3.3V)
VPE	55	OTP programming supply
VDDC	56	digital supply to core (3.3V)
OSCGND	57	oscillator ground supply
XTALIN	58	crystal oscillator input
XTALOUT	59	crystal oscillator output
RESET	60	reset
VDDP	61	digital supply to periphery (3.3V)
Audio Mute	62	Port 1.0 : Audio mute output (PushPull)
Power	63	Port 1.1 : Power output (PushPull)
IR in	64	Interrupt input 0 : R/C Infrared input

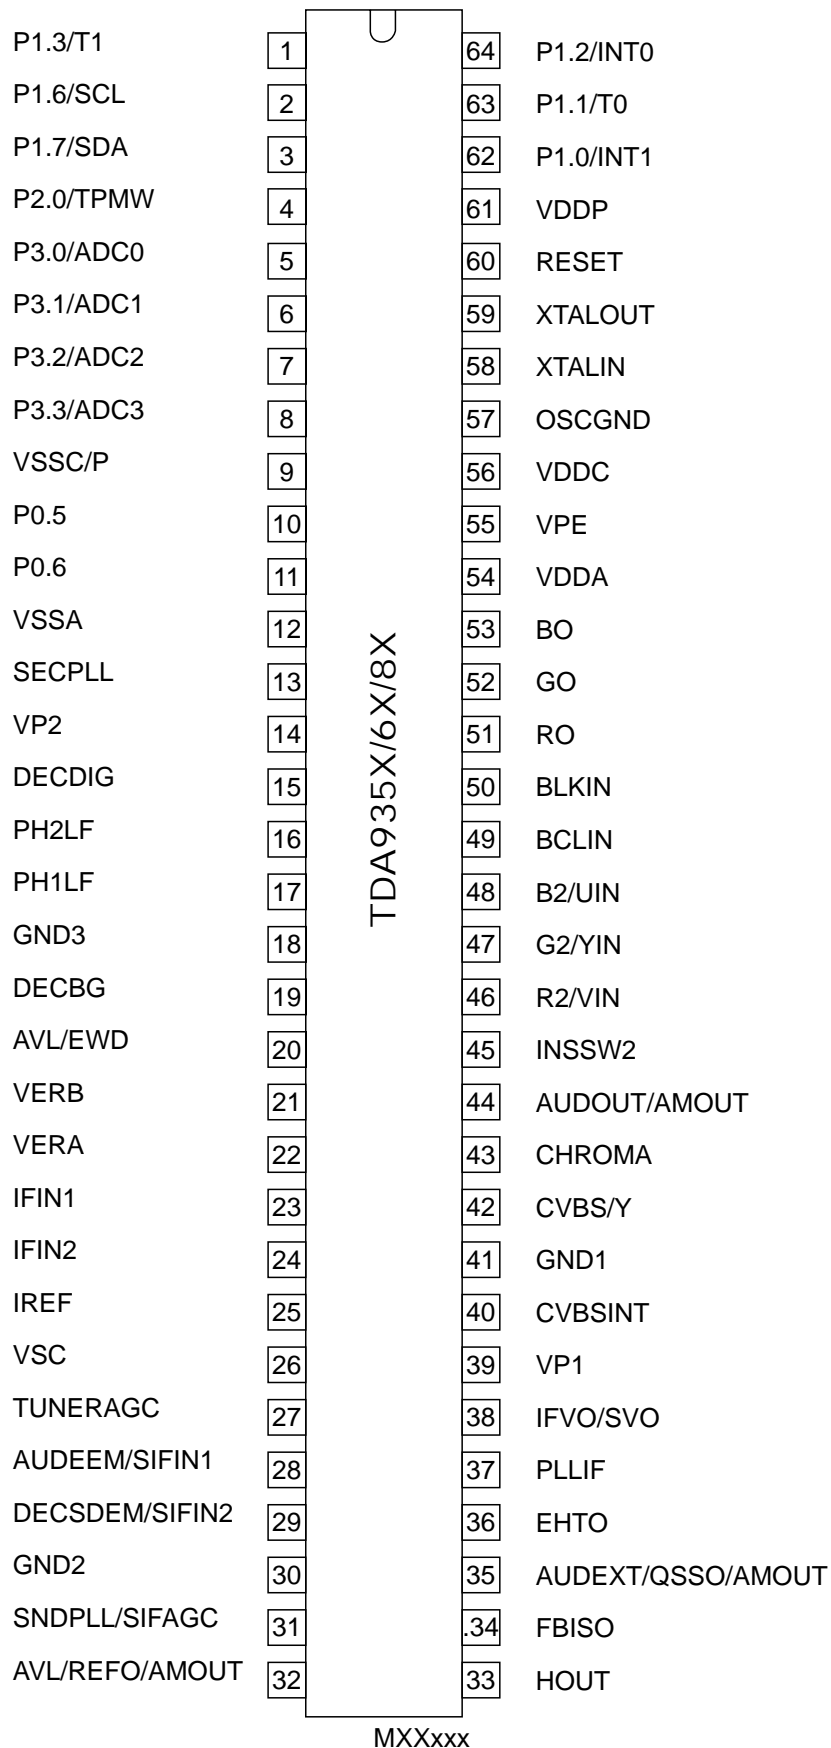

4-2 MSP34xxx Multistandard Sound Processor

The MSP34xxx is designed as a single-chip Multistandard Sound Processor for applications in analogue and digital TV sets, video recorders, and PC cards.

MSP34xxx	MSP3410D, 3415D, 3410G, 3415G	Stereo(Nicam & 2-Carrier)	CP-785A = DTE-25G5THS(FS-59T90) DTE-29G5TH(FS-68T90) CP-785AF = DTE-21U6TH(PF-51T31)
MSP3465G	-	Mono(Only AV Stereo)	CP-785A = DTE-25G4ZH(FS-59V81) DTE-29G4ZH(FS-68V81)

MSP 3415D features

- sound IF input
- No external filters required
- Stereo baseband input via integrated AD converters
- Two pairs of DA converters
- Two carrier FM or NICAM processing
- AVC : Automatic Volume Correction
- Bass, treble, volume processing
- Full SCART in/out matrix without restrictions
- Improved FM-identification
- Demodulator short programming
- Autodetection for terrestrial TV - sound standards
- Precise bit-error rate indication
- Automatic switching from NICAM to FM/AM or vice versa
- Improved NICAM synchronisation algorithm
- Improved carrier mute algorithm
- Improved AM-demodulation
- Reduction of necessary controlling
- Less external components

Basic Features of the MSP 3415D

Demodulator and NICAM Decoder Section

The MSP 3415D is designed to simultaneously perform digital demodulation and decoding of NICAM-coded TV stereo sound, as well as demodulation of FM or AM mono TV sound. Alternatively, two carrier FM systems according to the German terrestrial specs can be processed with the MSP 3415D.

The MSP 3415D facilitates profitable multistandard capability, offering the following advantages:

- Automatic Gain Control (AGC) for analogue input: input range: 0.10 - 3 Vpp
- integrated A/D converter for sound-IF input
- all demodulation and filtering is performed on chip and is individually programmable
- easy realisation of all digital NICAM standards (B/G, I, L and D/K)
- FM-demodulation of all terrestrial standards (include identification decoding)
- no external filter hardware is required
- only one crystal clock (18.432 MHz) is necessary
- high deviation FM-mono mode (max. deviation: approx. ± 360 kHz)

DSP-Section (Audio Baseband Processing)

- flexible selection of audio sources to be processed
- performance of terrestrial de-emphasise systems (FM, NICAM)
- digitally performed FM-identification decoding and de-matrixing
- digital baseband processing: volume, bass, treble
- simple controlling of volume, bass, treble

Analogue Section

- two selectable analogue pairs of audio baseband input (= two SCART inputs) input level: <2 V RMS, input impedance: >25 k Ω
- one selectable analogue mono input (i.e. AM sound): Not used in this chassis
- two high-quality A/D converters, S/N-Ratio: >85 dB
- 20 Hz to 20 kHz bandwidth for SCART-to-SCART copy facilities
- loudspeaker: one pair of four-fold oversampled D/A converters
output level per channel: max. 1.4 VRMS output resistance: max. 5 k Ω
S/N-ratio: >85 dB at maximum volume max. noise voltage in mute mode: < 10 V (BW: 20 Hz... 16 kHz)
- one pair of four-fold oversampled D/A converters supplying a pair of SCART-outputs.
output level per channel: max. 2 V RMS, output resistance: max. 0.5 k Ω
S/N-Ratio: >85 dB (20 Hz... 16 kHz)

Application Fields of the MSP 3415D

In the following sections, a brief overview about the two main TV sound standards, NICAM 728 and German FM Stereo, demonstrates the complex requirements of a multistandard audio IC.

NICAM plus FM/AM-Mono


According to the British, Scandinavian, Spanish, and French TV-standards, high-quality stereo sound is transmitted digitally. The systems allow two high-quality digital sound channels to be added to the already existing FM/AM-channel. The sound coding follows the format of the so-called Near Instantaneous Companding System (NICAM 728). Transmission is performed using Differential Quadrature Phase Shift Keying (DQPSK). Table below offers an overview of the modulation parameters. In the case of NICAM/FM (AM) mode, there are three different audio channels available: NICAM A, NICAM B, and FM/AM-mono. NICAM A and B may belong either to a stereo or to a dual language transmission. Information about operation mode and about the quality of the NICAM signal can be read by the controlling software via the control bus. In the case of low quality (high bit error rate), the controlling software may decide to switch to the analogue FM/AM-mono sound. Alternatively, an automatic NICAM-FM/AM switching may be applied.

German 2-Carrier System (DUAL FM System)

Since September 1981, stereo and dual sound programs have been transmitted in Germany using the 2-carrier system. Sound transmission consists of the already existing first sound carrier and a second sound carrier additionally containing an identification signal. More details of this standard are given in Tables below. For D/K very similar system is used.

TV standards

TVsystem	Position of sound carrier(MHz)	Sound modulation	Color system	Remark
B/G	5.5 / 5.7421875	FM Stereo	PAL	Applied
B/G	5.5 / 5.85	FM-Mono / NICAM	PAL	Applied
L	6.5 / 5.85	AM - Mono / NICAM	SECAM-L	N.A
I	6.0 / 6.552	FM-Mono / NICAM	PAL	N.A
D/K	6.5 / 6.2578125 D/K1 6.5 / 6.7421875 D/K2 6.5 / 5.85 D/K-NICAM	FM Stereo FM-Mono / NICAM	SECAM-East	N.A

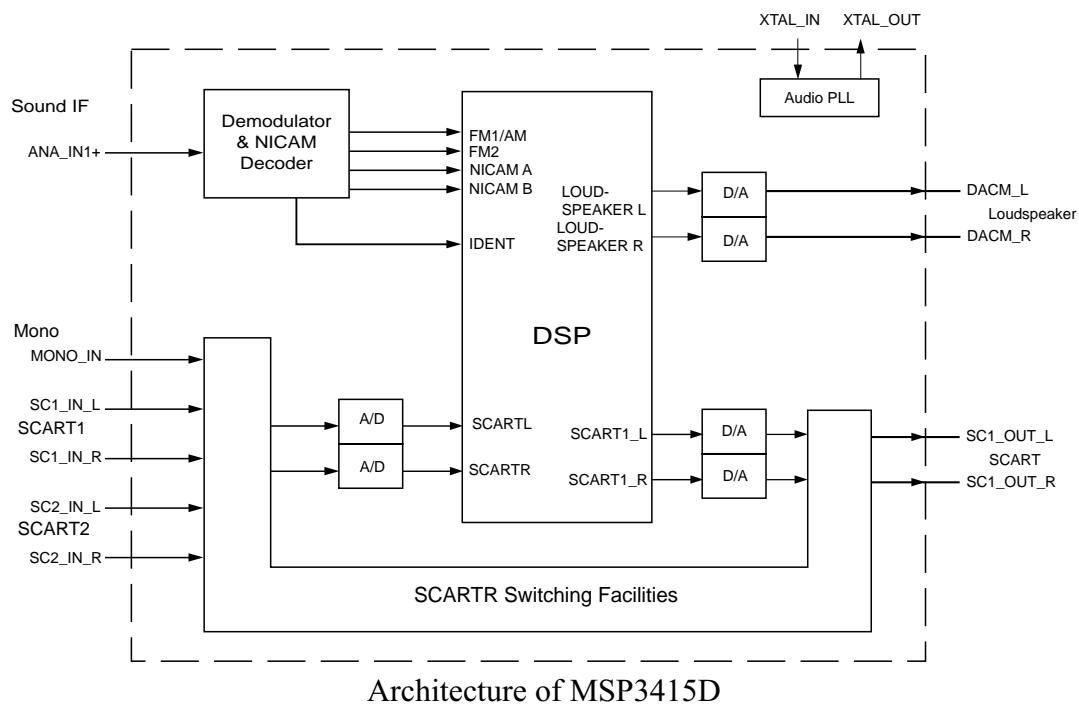

Pin connections and short description

Pin No.	Pin Name	Type	Short description
1	TP	Out	Test pin
2	NC		Not Connected
3	NC		Not Connected
4	TP	Out	Test pin
5	TP	Out	Test pin
6	ADR_SEL	In	I2C bus Address select
7	STANDBYQ	In	Standby (Low-active)
8	NC		Not Connected
9	I2C_CL	In / Out	I2C Clock
10	I2C_DA	In / Out	I2C data
11	TP	In / Out	Test pin
12	TP	In / Out	Test pin
13	TP	Out	Test pin
14	NC		Not Connected
15	TP	Out	Test pin

Pin No.	Pin Name	Type	Short description
16	TP	Out	Test pin
17	TP	Out	Test pin
18	DVSUP		Digital power supply +5V
19	DVSS		Digital Ground
20	NC		Not Connected
21	NC		Not Connected
22	NC		Not Connected
23	NC		Not Connected
24	RESETQ	In	Power-On-reset
25	NC		Not Connected
26	NC		Not Connected
27	VREF2		Reference ground 2 high voltage part
28	DACM_R	Out	Loudspeaker out Right
29	DACM_L	Out	Loudspeaker out Left
30	NC		Not Connected
31	TP	Out	Test pin
32	NC		Not Connected
33	NC		Not Connected
34	NC		Not Connected
35	VREF1		Reference ground 1 high voltage part
36	SC1_OUT_R	Out	Scart output 1, right
37	SC1_OUT_L	Out	Scart output 1, left
38	NC		Not Connected
39	AHVSUP		Analog power supply 8.0V
40	CAPL_M		Volume capacitor MAIN
41	AHVSS		Analog ground
42	AGNDC		Analog reference voltage high voltage part
43	NC		Not Connected
44	NC		Not Connected
45	NC		Not Connected
46	NC		Not Connected
47	NC		Not Connected
48	ASG2		Analog Shield Ground 2
49	SC2_IN_L	In	Scart input 2 in, left
50	SC2_IN_R	In	Scart input 2 in, right
51	ASG1		Analog Shield Ground 1
52	SC1_IN_L	In	Scart input 1 in, left
53	SC1_IN_R	In	Scart input 1 in, right
54	VREFTOP		Reference voltage IF A/D converter
55	MONO_IN	In	Mono input
56	AVSS		Analog ground
57	AVSUP		Analog power supply
58	ANA_IN1+		In IF input 1
59	ANA_IN1-		In IF common
60	NC		Not Connected
61	TESTEN	In	Test pin
62	XTAL_IN	In	Crystal oscillator
63	XTAL_OUT	Out	Crystal oscillator
64	NC		Test pin

4-3 TDA894xJ family Stereo Audio Amplifier

The TDA8946J is a dua-channel audio power amplifier with an output power of 2 x 7W at an 8 ohm load and a 12 V supply. The circuit contains two Bridges Tied Load (BTL) amplifiers with an all-NPN output stage and standby/mute logic. The TDA8946J comes in a 17-pin DIL power package.

Features

Few external components

Fixed gain

Standby and mute mode

No on/off switching plops

low standby current


High supply voltage ripple rejection


Outputs short-circuit protected to ground, supply and across the load

Thermally protected

Pin description

Pin	Symbol	Description
1	OUT-	negative loudspeaker terminal 1
2	GND1	ground channel 1
3	Vcc1	supply voltage channel 1
4	OUT1+	positive loudspeaker terminal 1
5	n.c.	not connected
6	IN1+	positive input1
7	n.c.	not connected
8	IN1-	negative input1
9	IN2-	negative input2
10	MODE	mode selection input
11	SVR	half supply voltage decoupling (ripple rejection)
12	IN2+	positive input2

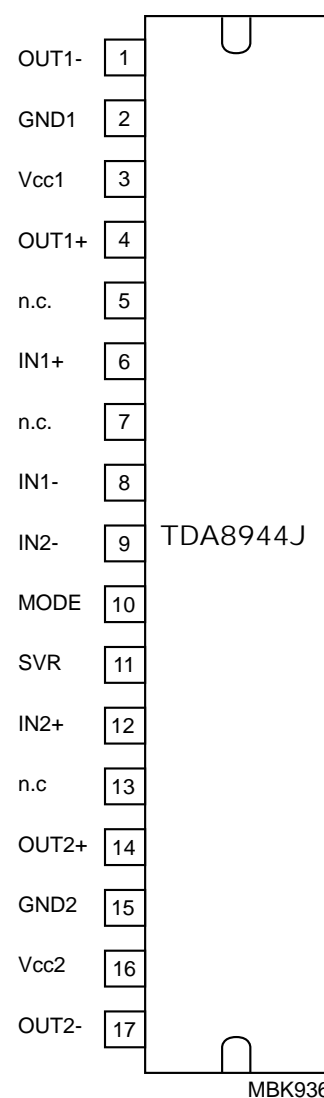

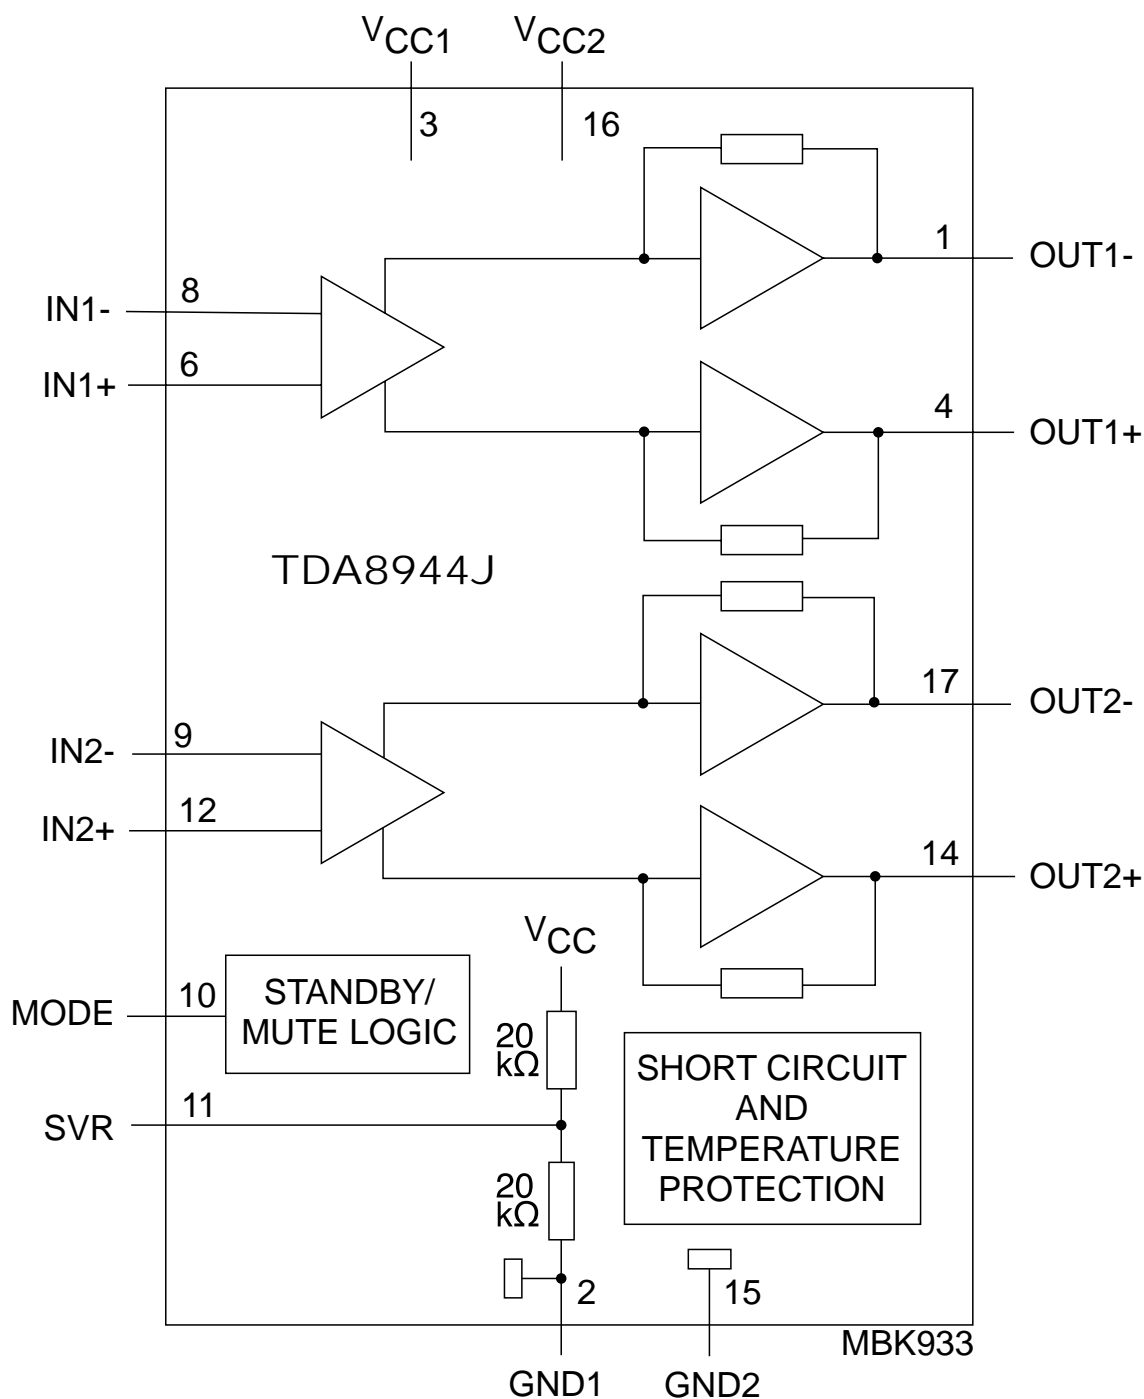

4-4 TDA835xJ Vertical Amplifier

The TDA835xJ are power circuit for use in 90° and 110° colour deflection systems for field frequencies of 25 to 200Hz and 16/9 picture tubes. The circuit provides a DC driven vertical deflection output circuit, operating as a highly efficient class G system. Due to the full bridge output circuit the deflection coils can be DC coupled.

The IC is constructed in a Low Voltage DMOS process that combines Bipolar, CMOS and DMOS devices. MOS transistors are used in the output stage because of the absence of second breakdown.


4-4-1 TDA8358J

An East-West output stage is provided that is able to sink current from the diode modulator circuit.

Features :

- Few external components
- Highly efficient fully DC-coupled vertical output bridge circuit
- Short rise and fall time of the vertical flyback switch
- Guard circuit
- Temperature (thermal) protection
- High EMC because of common mode inputs
- East-West output stage

$V_{i(pos)}$	1	TDA8358J
$V_{i(neg)}$	2	
V_p	3	
V_{oB}	4	
V_{iew}	5	
GND_V	6	
GND_{EW}	7	
V_{oEW}	8	
V_{flb}	9	
V_{oA}	10	
$V_{o(guard)}$	11	
V_M	12	
I_{comp}	13	

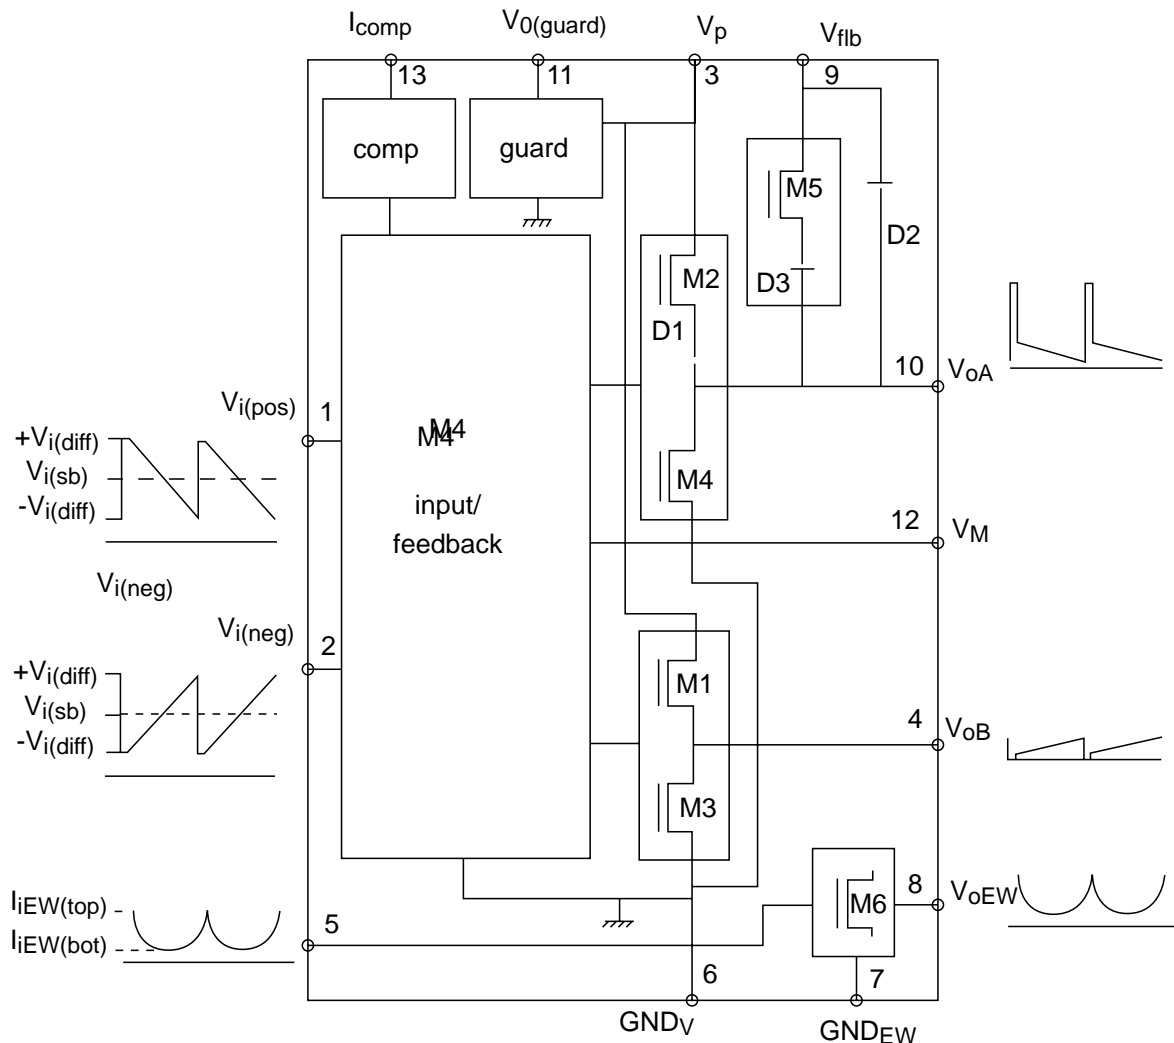

4-5 TDA6107Q

The TDA6107Q includes three video output amplifiers in one plastic DIL-Bent-SIL 9-pin medium power package, using high voltage DMOS technology, and is intended to drive the three cathodes of a colour CRT directly. To obtain maximum performance, the amplifier should be used with black-current control.

Features

Typical bandwidth of 5.5 MHz for an output signal of 60 Vpp

High slew rate of 900V/s

No external components required

Very simple application

Single supply voltage of 200V

Internal reference voltage of 2.5 V


Fixed gain of 50.


Black-current stabilisation (BCS) circuit

Thermal protection

Pin description

Pin	Symbol	Description
1	$V_{i(1)}$	inverting input 1
2	$V_{i(2)}$	inverting input 2
3	$V_{i(3)}$	inverting input 3
4	GND	ground (fin)
5	I_{om}	black current measurement output
6	V_{DD}	supply voltage
7	$V_{OC(3)}$	cathode output 3
8	$V_{OC(2)}$	cathode output 2
9	$V_{OC(1)}$	cathode output 1

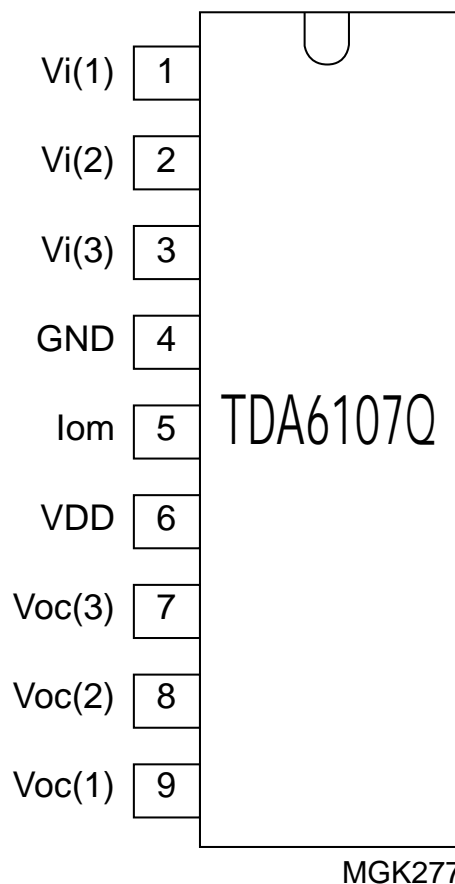

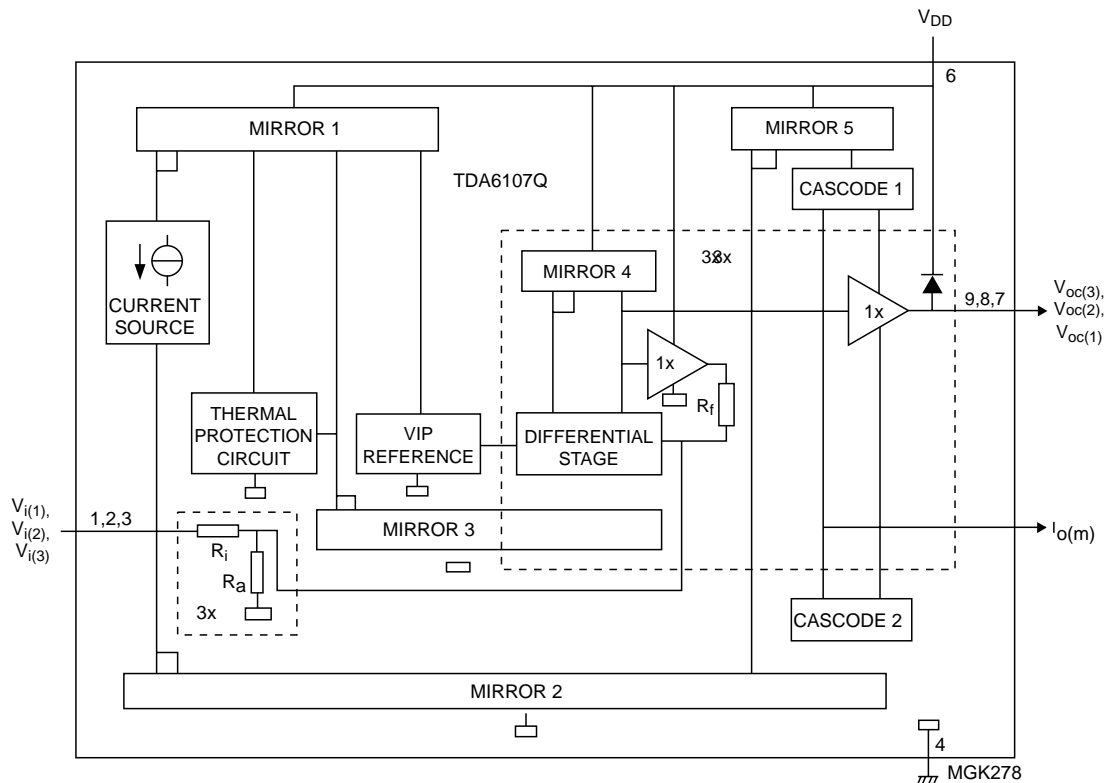

Block diagram TDA6107Q

4-6 24C08 8 Kbit EEPROM

features :

8 Kbit serial I2C bus EEPROM

Single supply voltage : 4.5 V to 5.5 V

1 Million Erase/Write cycles (minimum)

40 year data retention (minimum)

Pin description

Pin No.	Name	Description
1,2,3	E0, E1, E2	Device address
5	SDA	Serial Data/Address Input/Output
6	SCL	Serial clock
7	WC	Write contro
8	Vcc	Supply voltage
4	Vss	Ground

The memory device is compatible with the I2C memory standard. This is a two wire serial interface that uses a bi-directionnal data bus and serial clock. The memory carries a built-in- 4-bit unique device type identifier code (1010) in accordance with the I2C bus definition.

Serial Clock (SCL)

The SCL input is used to strobe all data in and out of the memory.

Serial Data (SDA)

The SDA pin is bi-directionnal, and is used to transfer data in or out of the memory

4-7 STR - F665X

4-7-1 General description

The STR-F6654 is an hybrid IC with a build-in MOSFET and control IC, designed for flyback converter type switch mode power supply applications.


4-7-2 Features

Small SIP fully isolated molded 5 pins package

Many protection functions :

- * Pulse-by-pulse overcurrent protection (OCP)
- * Overvoltage protection with latch mode (OVP)
- * Thermal protection with latch mode (TSD)

4-7-3 Block diagram

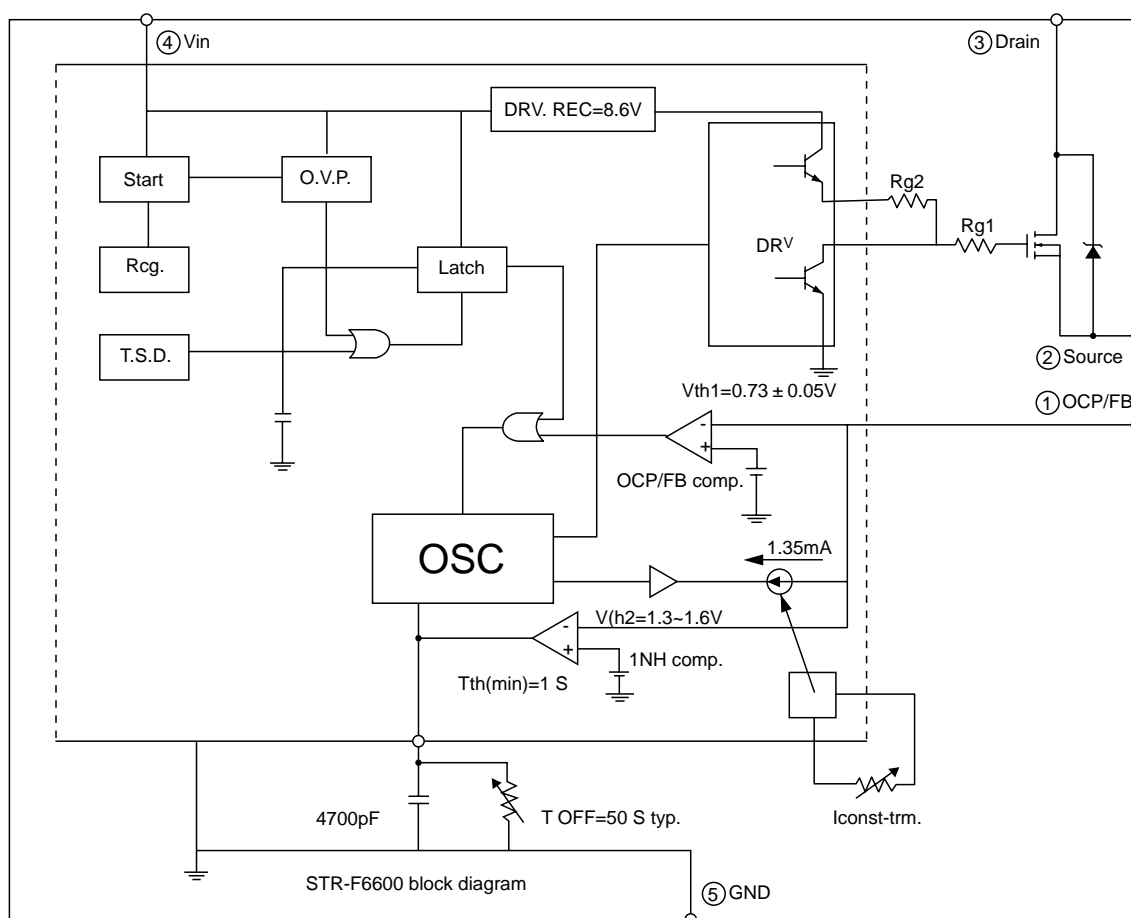

4-7-4 Pins description

pin	name	symbol	description
1	Overcurrent / feedback	O.C.P./ F.B.	Input of overcurrent detection signal and feedback signal
2	Source	S	MOSFET source
3	Drain	D	MOSFET drain
4	Supply	V _{IN}	Input of power supply for control circuit
5	Ground	GND	Ground

4-7-5 Control part electrical characteristics


description	IC pins number	symbol	rating			unit
			min.	typ.	max.	
Operation start voltage	4-5	V _{IN} (on)	14.4	16	17.6	V
Operation stop voltage	4-5	V _{IN} (off)	9	10	11	V
Circuit current in operation	4-5	I _{IN} (on)	-	-	30	mA
Circuit current in non-operation	4-5	I _{IN} (off)	-	-	100	A
Maximum OFF time	-	T _{OFF} (max)	45	-	55	sec
Minimum time for input of quaxi resonant signals	1-5	T _{TH} (2)	-	-	1.0	sec
Minimum off time	-	T _{OFF} (min)	-	-	1.5	sec
O.C.P./F.B. terminal threshold voltage 1	1-5	V _{TH} (1)	0.68	0.73	0.78	V
O.C.P./F.B. terminal threshold voltage 2	1-5	V _{TH} (2)	1.3	1.45	1.6	V
O.C.P./F.B. terminal extraction current	1-2	I _{OCP/FB}	1.2	1.35	1.5	mA
O.V.P. operation voltage	4-5	V _{IN} (OVP)	20.5	22.5	24.5	V
Latch circuit sustaining voltage	4-5	I _{IN} (H)	-	-	400	A
Latch circuit release voltage	4-5	V _{IN} (La.off)	6.6	-	8.4	V
Thermal shutdown operating temperature	-	T _J (TSD)	140	-	-	°C

4-7-6 MOSFET electrical characteristics

description	IC pins number	symbol	rating			unit
			min.	typ.	max.	
Drain-to-source breakdown voltage	3-2	V _{DSS}	650	-	-	V
Drain leakage current	3-2	I _{DSS}	-	-	300	μA
On-resistance	3-2	R _{DS} (on)	-	-	1.15	Ω
Switching time	3-2	t _f	-	-	250	nsec
Thermal resistance	-	Θ _{CH} -F	-	-	0.95	°C/W

5 - Circuit description

5-1 Block diagram

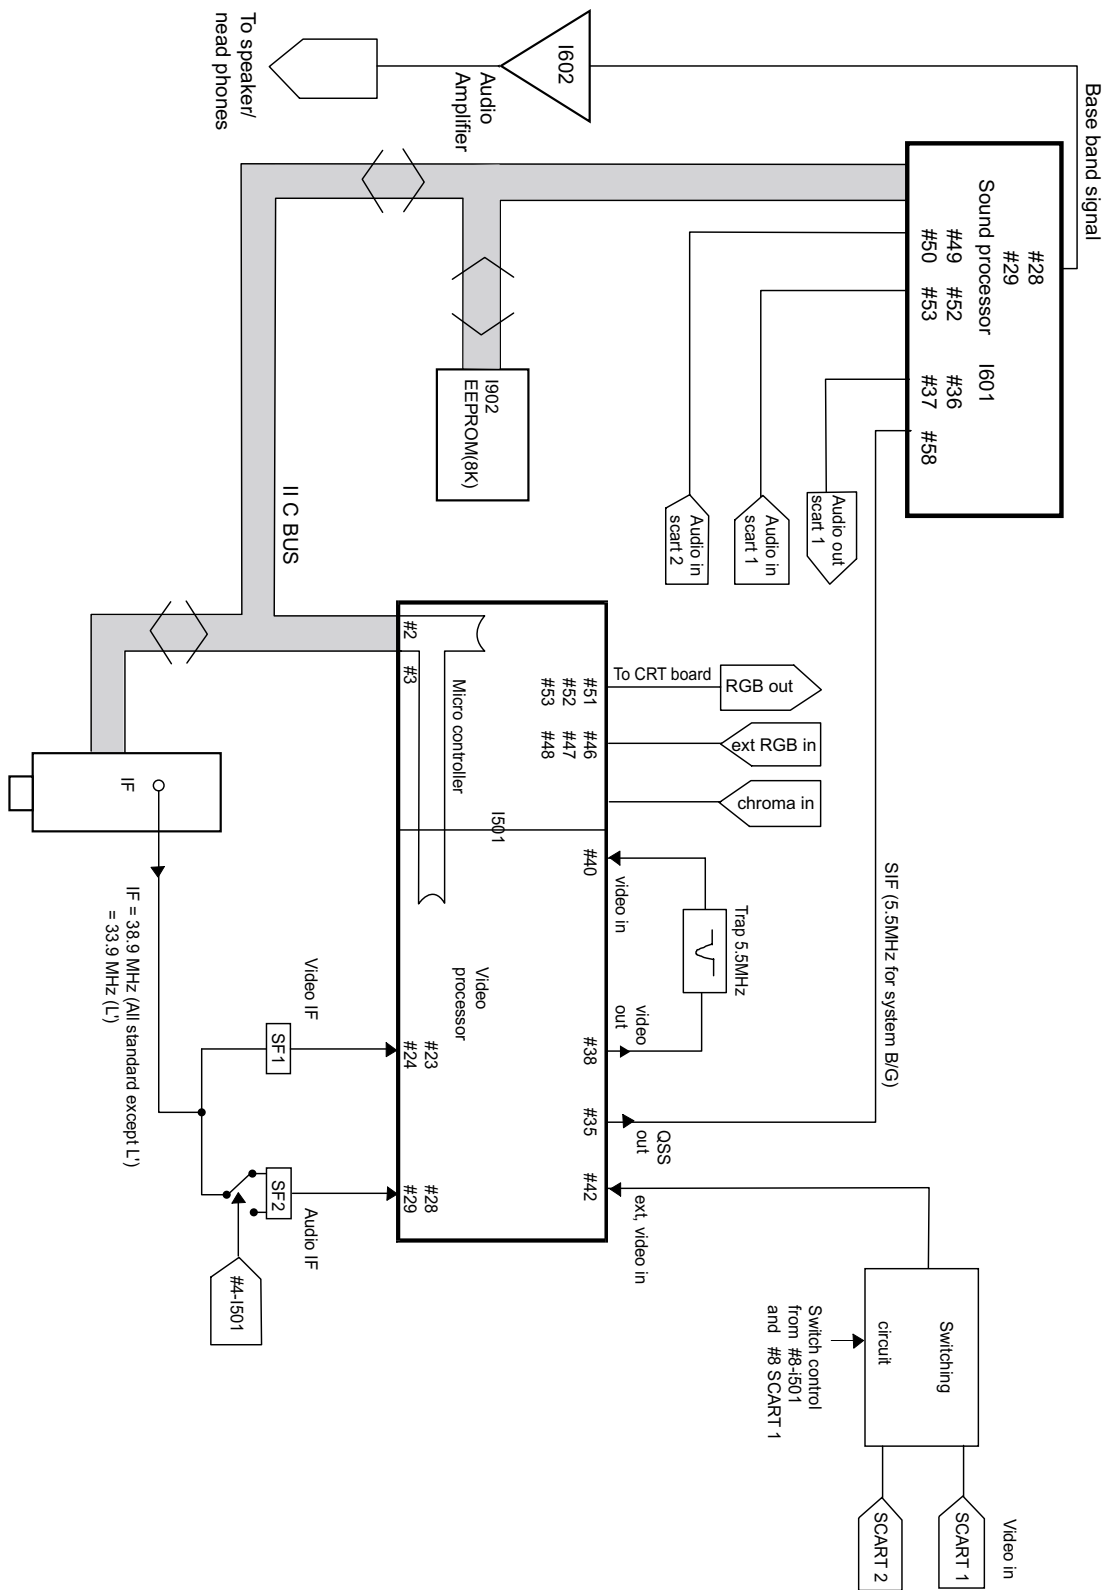

FUNCTIONAL DESCRIPTION OF VIDEO PROCESSOR Vision IF amplifier

The vision IF amplifier can demodulate signals with positive and negative modulation. The PLL demodulator is completely alignment-free.

The VCO of the PLL circuit is internal and the frequency is fixed to the required value by using the clock frequency of the -Controller/Teletext decoder as a reference. The setting of the various frequencies is made by the controlling software in subaddress 27H (38.9 Mhz for all system). Because of the internal VCO the IF circuit has a high immunity to EMC interferences.

QSS Sound circuit

The sound IF amplifier is similar to the vision IF amplifier and has an external AGC decoupling capacitor.

The single reference QSS mixer is realised by a multiplier. In this multiplier the SIF signal is converted to the intercarrier frequency by mixing it with the regenerated picture carrier from the VCO. The mixer output signal is supplied to the output via a high-pass filter for attenuation of the residual video signals. With this system a high performance hi-fi stereo sound processing can be achieved.

Video switches

The video switch has one input for an external CVBS or Y/C signal. The selected CVBS signal can be supplied to pin 38, the IF video output. The selection between both signals is realised by the controlling software in subaddress 22H.

The video ident circuit is connected to the selected signal. This ident circuit is independent of the synchronisation.

Synchronisation circuit

The IC contains separator circuits for the horizontal and vertical sync pulses and a data-slicing circuit which extracts the digital teletext data from the analogue signal.

The horizontal drive signal is obtained from an internal VCO which is running at a frequency of 25 MHz. This oscillator is stabilised to this frequency by using a 12 MHz signal coming from the reference oscillator of the -Controller/Teletext decoder.

The horizontal drive is switched on and off via the soft start/stop procedure. This function is realised by means of variation of the TON of the horizontal drive pulses.

The vertical synchronisation is realised by means of a divider circuit. The vertical ramp generator needs an external resistor and capacitor. For the vertical drive a differential output current is available. The outputs are DC coupled to the vertical output stage.

In the TDA936x series, the following geometry parameters can be adjusted for all picture tubes :

- Horizontal shift
- Vertical amplitude
- Vertical slope
- S-correction
- Vertical shift

The types which are intended to be used in combination with 110° picture tubes have an East-West control circuit. The additional controls for these types are:

- EW width
- EW parabola width
- EW upper and lower corner parabola correction
- EW trapezium correction
- Vertical zoom, horizontal parallelogram and bow correction.

Chroma and luminance processing

The chroma band-pass and trap circuits (including the SECAM cloche filter) are realised by means of gyrators and are tuned to the right frequency by comparing the tuning frequency with the reference frequency of the colour decoder. The luminance delay line and the delay cells for the peaking circuit are also realised with gyrators. The circuit contains a black stretcher function which corrects the black level for incoming signals which have a difference between the black level and the blanking level.

Colour decoder

The ICs can decode PAL, NTSC and SECAM signals. The PAL/NTSC decoder does not need external reference crystals but has an internal clock generator which is stabilised to the required frequency by using the 12 MHz clock signal from the reference oscillator of the -Controller/Teletext decoder.

The Automatic Colour Limiting (ACL) circuit (switchable via the ACL bit in subaddress 20H) prevents that oversaturation occurs when signals with a high chroma-to-burst ratio are received. The ACL circuit is designed such that it only reduces the chroma signal and not the burst signal. This has the advantage that the colour sensitivity is not affected by this function.

SOFTWARE CONTROL

The CPU communicates with the peripheral functions using Special function Registers (SFRS) which are addressed as RAM locations. The registers for the Teletext decoder appear as normal SFRs in the -Controller memory map and are written to these functions by using a serial bus. This bus is controlled by dedicated hardware which uses a simple handshake system for software synchronisation.

For compatibility reasons and possible re-use of software blocks, the TV processor is controlled by I2C bus. The TV processor control registers cannot be read. Only the status registers can be read (Read address 8A).

The SECAM decoder contains an auto-calibrating PLL demodulator which has two references, via the divided 12 MHz reference frequency (obtained from the μ -Controller) which is used to tune the PLL to

the desired free-running frequency and the bandgap reference to obtain the correct absolute value of the output signal. The VCO of the PLL is calibrated during each vertical blanking period, when the IC is in search or SECAM mode.

The base-band delay line (TDA 4665 function) is integrated. This delay line is also active during NTSC to obtain a good suppression of cross colour effects. The demodulated colour difference signals are internally supplied to the delay line.

RGB output circuit and black-current stabilisation

In the RGB control circuit the signal is controlled on contrast, brightness and saturation. The ICs have a linear input for external RGB signals. The signals for OSD and text are internally supplied to the control circuit. The output signal has an amplitude of about 2 Volts black-to-white at nominal input signals and nominal settings of the various controls.

To obtain an accurate biasing of the picture tube the 'Continuous Cathode Calibration' system has been included in these ICs. A black level off set can be made with respect to the level which is generated by the black current stabilisation system. In this way different colour temperatures can be obtained for the bright and the dark part of the picture.

The black current stabilisation system checks the output level of the 3 channels and indicates whether the black level of the highest output is in a certain window or below or above this window. This indication is read from the status byte 01 and is used for automatic adjustment of the Vg2 voltage during the production of the TV receiver.

During switch-off of the TV receiver a fixed beam current is generated by the black current control circuit. This current ensures that the picture tube capacitance is discharged. During the switch-off period the vertical deflection is placed in an overscan position so that the discharge is not visible on the screen.

5-2 IF

The TDA936x has an alignment free IF PLL demodulator. The fully integrated oscillator is automatically calibrated, using the 12 Mhz crystal as a frequency reference. The IF frequency is simply set in TV-Processor by I2C bus.

The AFC information is available via I2C bus from the TV-Processor status bytes. The controlling software uses this information for tuner frequency tracking (automatic following). The AFC windows is typically 125Khz wide. The minimum frequency step of the tuner is 62.5 Khz.

This AFC function is disabled when a program is tuned using the direct frequency entry or after fine tuning adjustment. Therefore it is recommended to tune channel with the TV search function (manual or Auto setup) or using the direct channel entry to enable the Automatic Frequency Control.

SAW filters

Ref.	Standard	Features
K3953M	B/G	<ul style="list-style-type: none">- IF filter for video application- TV IF filter with Nyquist slopes at 38.9 MHz- Constant group delay
K9650M	B/G	<ul style="list-style-type: none">- IF filter for audio application- TV IF audio filter with two channels- Channel (B/G) with one pass band for sound carriers 33.40 MHz

The SAW filter (SF1) has a double Nyquist slope at 38.9 MHz needed for this multistandard application. The disadvantage of this choice is that a 5.5 MHz trap filter (Z501) is needed to suppress the residual sound carrier in the video for B/G signals.

5-3 Source switching

The TDA936x has only one external video input, the external video switching circuit made with Q504, Q505 and Q508 allows 2 external video signal inputs. The switching command can be the -Controller pin 8 when the software takes control of the video source.

The -Controller pin 8 is automatically configured by the controlling software (See table below).

TV mode	μ -Controller pin 8 Status	Level
RF auto	Input - High Impedance	< 1V
RF Forced	Input - High Impedance	not defined
AV 1	Input - High Impedance	> 2.0 V
AV 1	Output - Push Pull	Max. 3.3V
AV 2	Output - Push Pull	< 0.2 V
SVHS	Output - Push Pull	< 0.2 V

The controlling software via I2C bus selects the signal source :

- Video signal from tuner (Pin 40).
- External video (SCART 1 or 2) depending on Q508 base level.
- External SVHS from SCART 2.

The sound source switching is done in the MSP3415D (I601), by the -Controller via I2C bus.

Fast R, G, B insertion : The external R, G, B insertion needs a fast switching and cannot be controlled by the software (instruction cycle of 1 sec). The fast switching pin 16 of SCART 1 is directly connected to the TV processor pin 45 (Fast blanking input). The display is synchronised with the selected video source, i.e. to get stable R, G, B inserted signal they must be synchronised with the selected video source. The controlling software only enable or disable (AV2, SVHS, or Forced RF source selected) fast blanking.

5-4 μ -Controller I/O pin configuration and function

The I/O pins of the -Controller can be configured in many way. All port functions can be individually programmed by use of the SFR registers.

Each I/O port pin can be individually programmed in these configurations :

Open drain

In this mode, the port can function as in and output. It requires an external pull-up resistor. The maximum allowable supply voltage for this pull up resistor is +5V.

So in this mode it is possible to interface a 5 Volt environment like I2C while the -Controller has a 3.3 Volt supply.

Push-Pull

The push pull mode can be used for output only. Both sinking and sourcing is active, which leads to steep slopes. The levels are 0 and Vddp, the supply voltage 3.3Volts.

High impedance

This mode can be used for input only operation of the port.

Special port for LED

Pin 10 and 11 have the same functionality as the general I/O pins but in addition, their current source and sink capacity is 8 mA instead of 4 mA. These pins are used for driving LED' s via a series current limiting resistor.

μ -Controller I/O pin configuration and function table

pin	name	configuration		description
		Stand by	TV ON	
1	n.u.	High impedance	High impedance	not used
2	SCL	Open Drain	Open Drain	Serial clock line
3	SDA	Open Drain	Open Drain	Serial data line
4				
5	OCP	High impedance	High impedance	Over Current Protection (Switch the set OFF if the voltage on this pin is <2.33V)
6	-	High impedance	High impedance	For factory use only
7	Key in	High impedance	High impedance	Local keyboard input
8	S/SW	High impedance	See table above	external video switch
10	Red LED	High impedance	Open Drain	
11	Green LED	Open Drain	High impedance	
62	Audio mute	Push Pull	Push Pull	High in stand by mode

5-5 Sound processing

Analogue sound IF - input section

The input pins ANA_IN1+ and ANA_IN- offer the possibility to connect sound IF sources to the MSP 3415D. The analogue-to-digital conversion of the preselected sound IF signal is done by an A/D converter, whose output is used to control an analogue automatic gain circuit (AGC), providing an optimal level for a wide range of input levels.

Quadrature Mixers

The digital input coming from the integrated A/D converter may contain audio information at a frequency range of theoretically 0 to 9 MHz corresponding to the selected standards. By means of two programmable quadrature mixers, two different audio sources ; for example, NICAM and FM-mono, may be shifted into baseband position.

Phase and AM discrimination

The filtered sound IF signals are demodulated by means of the phase and amplitude discriminator block. On the output, the phase and amplitude is available for further processing. AM signals are derived from the amplitude information, whereas the phase information serves for FM and NICAM demodulation.

In case of NICAM - mode, the phase samples are decoded according the DQPSK - coding scheme. The output of this block contains the original NICAM bitstream.

DSP section

All audio baseband functions are performed by digital signal processing (DSP). The DSP section controls the source and output selection, and the signals processing.

Sound Mode switching

In case of NICAM transmission, the controlling software read the bit error rate and the operation mode from the NICAM Decoder. When the set is in “Auto detection” mode (default mode after ATSS) the controlling software set automatically the sound mode (NICAM mono, NICAM Dual 1 or NICAM Dual 2) depending on the transmitted mode.

In case of 2 Carrier FM transmission, the controlling software read the transmission mode and the signal quality level from the Stereo Detection Register. When the set is in “Auto detection” mode the controlling software set automatically the sound mode (mono, Stereo, Dual 1, Dual 2) depending on the transmitted mode.

In “Auto detection” mode the controlling software evaluate the signal quality and automatically switch to the analogy sound carrier 1, if the transmission quality is too poor. To avoid unwanted automatic switching the threshold levels mono to stereo and stereo to mono is different. In “forced mono “ mode (Red OSD in recall section), the controlling software configure the MSP3415D to demodulate only the analogue (FM or AM) sound carrier 1, no matter the signal quality.

The sound mode “ forced “ or “ Autodetect” is stored for each programme.

5-6 Sound amplification

The TDA8946J is a stereo BTL audio amplifier capable of delivering 2 x 7 W output power to an 8 Ω load at THD = 10%, using a 12 V power supply and an external heatsink. The voltage gain is fixed at 32dB.

With the three-level MODE input the device can be switched from ‘ standby’ to ‘ mute’ and to ‘ operating’ mode.

The TDA 8946J outputs are protected by an internal thermal shutdown protection mechanism and short-circuit protection.

Power amplifier

The power amplifier is a Bridge Tied Load (BTL) amplifier with an all-NPN output stage, capable of delivering a peak output current of 1.5 A.

The BTL principle offers the following advantages :

- Lower peak value of the supply current.
- The ripple frequency on the supply voltage is twice the signal frequency.
- No DC-blocking capacitor
- Good low frequency performance

Mode selection

The TDA894xJ has several functional modes, which can be selected by applying the proper DC voltage to pin MODE.

Mute : In this mode the amplifier is DC biased but not operational (no audio output). This allows the input coupling capacitors to be charged to avoid pop-noise. The device is in mute mode when $2.5\text{ V} < V_{\text{MODE}} < (V_{\text{CC}} - 1.5\text{ V})$.

Operating : In this mode the amplifier is operating normally. The operating mode is activated at $V_{\text{MODE}} < 0.5\text{ V}$.

5-7 Vertical deflection

The vertical driver circuit is a bridge configuration. The deflection coil is connected between the output amplifiers, which are driven in phase opposition. The differential input circuit is voltage driven. The input circuit is especially intended for direct connection to driver circuits which deliver symmetrical current signals, but is also suitable for asymmetrical currents. The output current of these devices is converted to voltages at the input pins via resistors R350 and R351. The differential input voltage is compared with the output current through the deflection coils measured as voltage across R302, which provides internal feedback information. The voltage across R302 is proportional to the output current.

Flyback voltage

The flyback voltage is determined by an additional supply voltage V_{fb} . The principle of operation with two supply voltages (class G) makes it possible to fix the supply voltage V_p optimum for the scan voltage and the second supply voltage V_{fb} optimum for the flyback voltage. Using this method, very high efficiency is achieved. The supply voltage V_{fb} is almost totally available as flyback voltage across the coil, this being possible due to the absence of a coupling capacitor.

Protection

The output circuit has protection circuits for :

- Too high die temperature
- overvoltage of output stage A

Guard circuit

The guard signal is not used by the TDA936x to blank the screen in case of fault condition.

Damping resistor

For HF loop stability a damping resistor (R305) is connected across the deflection coil.

EAST-WEST Amplifier (TDA8358J only)

The East-West amplifier is current driven. It can only sink currents of the diode modulator circuit. A feedback resistor R397 is connected between the input and output of this inverting amplifier in order to convert the East-West correction input into an output voltage.

5-8 Power supply (STR-F6654)

5-8 -1 STR-F6654 general description


The STR-F6654 is an hybrid IC with a build-in MOSFET and control IC, designed for flyback converter type switch mode power supply applications.

5-8 -2 Power supply primary part operations

An oscillator generates pulses signals which turn on and off a MOSFET transistor.

* Start -up circuit: V_{IN}

The start-up circuit is used to start and stop the operation of the control IC, by detecting a voltage appearing at V_{IN} pin (pin 4).

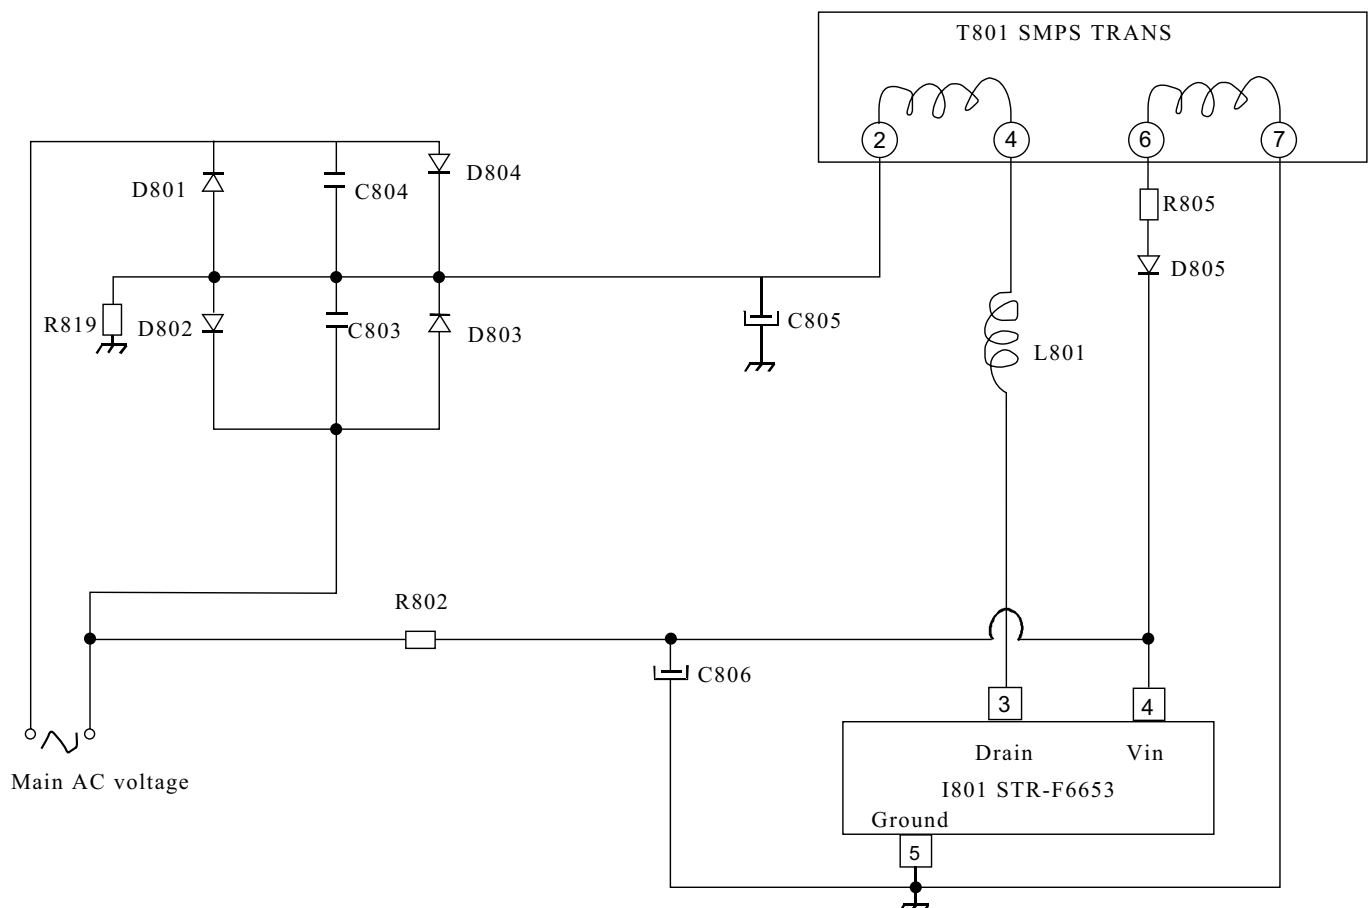


Power supply start-up circuit

When the power switch is pushed on, V_{IN} increases slowly. During this time, C806 is charged through R802.


As soon as V_{IN} reaches 16V, the STR-F6654 control circuit starts operating. Then, V_{IN} is obtained by smoothing the winding voltage which appears between pin6 and pin7 of the SMPS transformer.

As this winding voltage does not increase to the set voltage immediately after the control circuit starts operating, V_{IN} starts dropping. However, as this winding voltage reaches the set value before V_{IN} voltage drops to the shutdown voltage (at 11V), the control circuit continues operating (see below V_{IN} voltage at start-up). R805 resistor prevents that V_{IN} pin voltage varies according to the secondary side output current.


V_{IN} must be set higher than the shutdown voltage ($V_{IN} \text{ (off)} = 11V_{\text{max}}$) and lower than the O.V.P. (overvoltage protection) operating voltage ($V_{OVP} = 20.5V_{\text{min}}$)

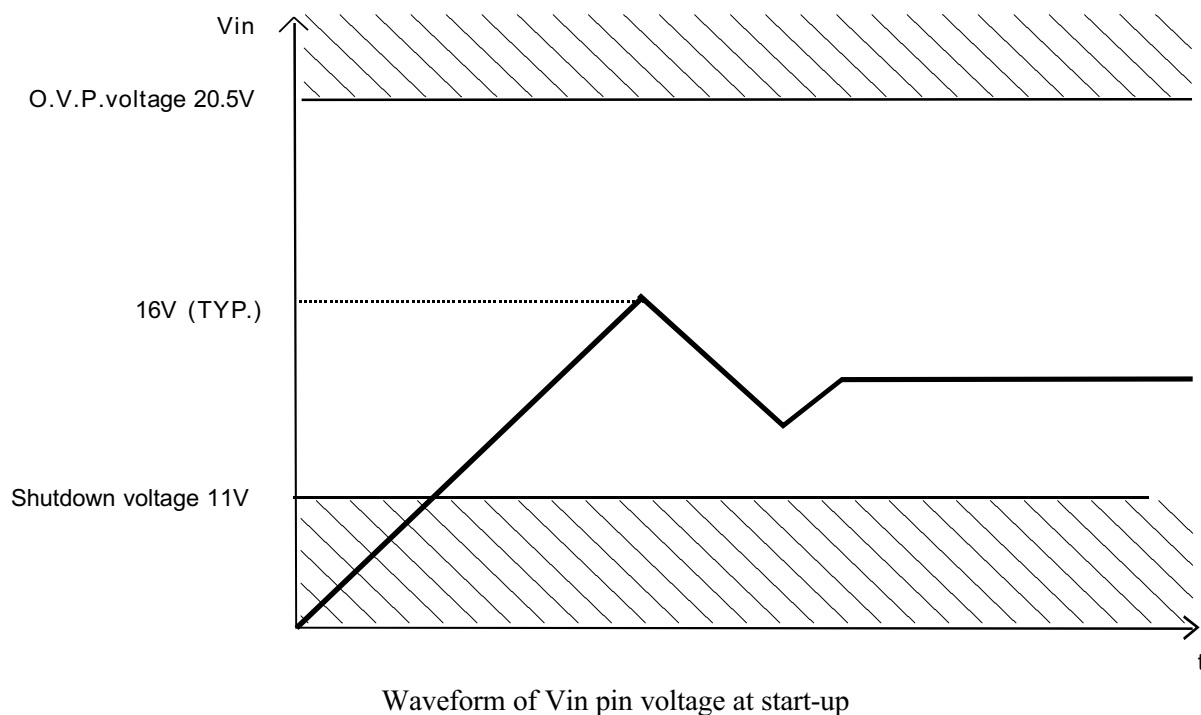

* STR-F665X oscillating operation

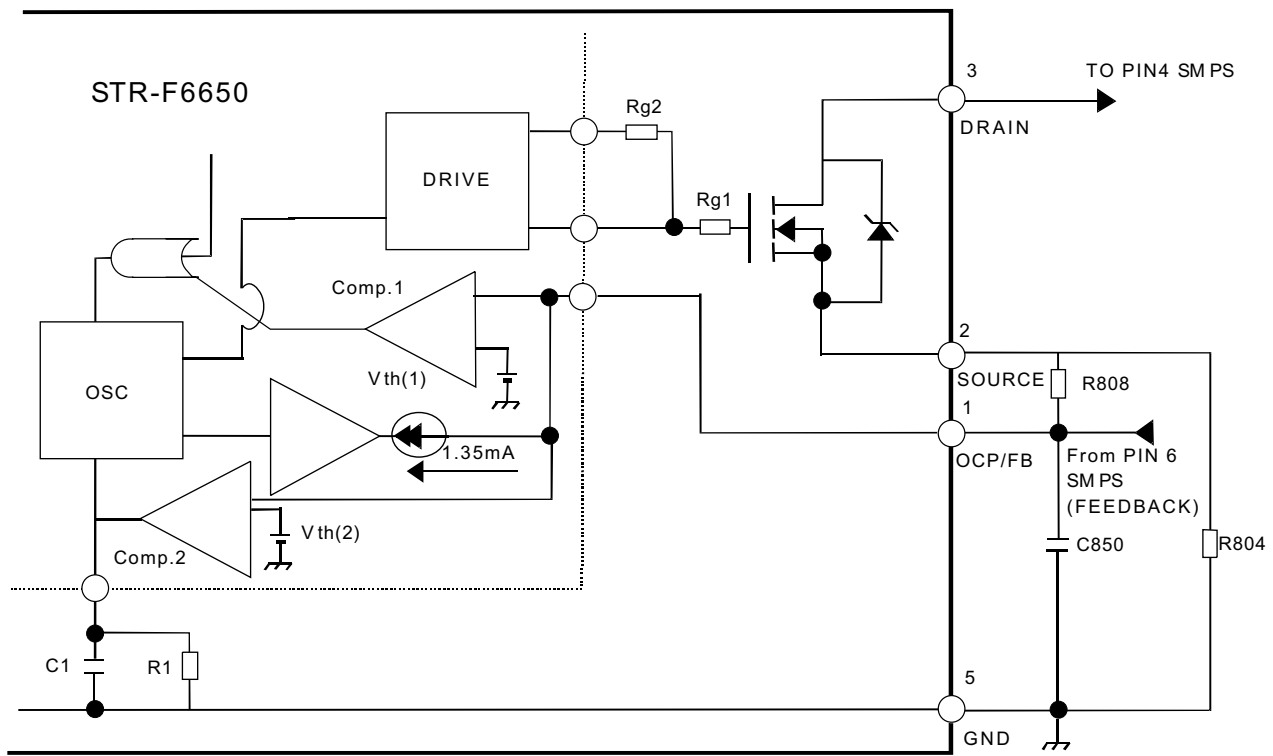

Oscillating operation

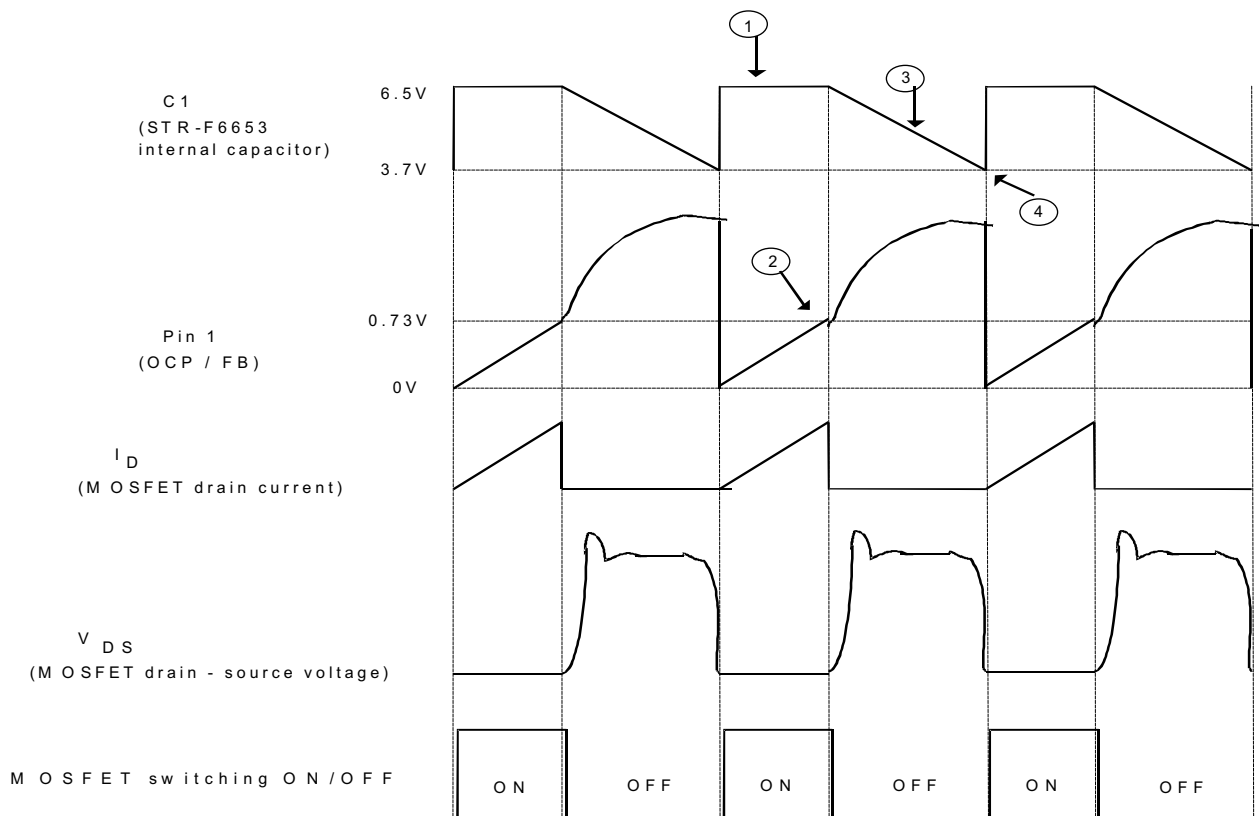

Waveforms during oscillating operation

① When the MOSFET is ON, the STR-F6650 internal capacitor C1 is charged at the constant voltage 6.5V.

At the same time, the voltage at pin 1 (OCP / FB) increases with the same waveform as the MOSFET drain current.

② When the pin 1 voltage reaches the threshold voltage $V_{TH1} = 0.73V$, the STR-F6650 internal comparator 1 starts operating. The STR-F6650 internal oscillator is inverted and the MOSFET turns OFF.

③ When the MOSFET turns OFF, charging of STR-F6650 internal capacitor C1 is released and C1 starts discharging by the STR-F6654 internal resistance R1. So, C1 voltage starts falling in accordance with the gradient regulated by the constant discharging time of C1 and R1. So, this means that the fixed time determined by C1 and R1 is the OFF-time of the MOSFET.

④ When C1 voltage falls to around 3.7V, the STR-F6650 internal oscillator is reversed again and the MOSFET turns ON. C1 is quickly charged to around 6.5V

The MOSFET continues to oscillate by repeating the above procedure.

* STR-F6650 protection circuits

overcurrent protection function (OCP)

Overcurrent protection is performed pulse by pulse detecting at STR-F6654 pin 1 (OCP) the peak of the MOSFET drain current in every pulse.

latch circuit

This circuit sustains an output low from the STR-F6654 internal oscillator and stops operation of the power supply when overvoltage protection (OVP) and thermal shutdown (TSD) circuit are under operation

thermal shutdown circuit (TSD)

This circuit triggers the latch circuit when the frame temperature of STR-F6654 IC exceeds 140°C


overvoltage protection circuit (OVP)

This circuit triggers the latch circuit when the V_{in} voltage exceeds 22V (typ.)

5-9 TV start-up, TV normal run and stand-by mode operations

5-9-1 TV start-up operations

* Schematic diagram for start-up operations

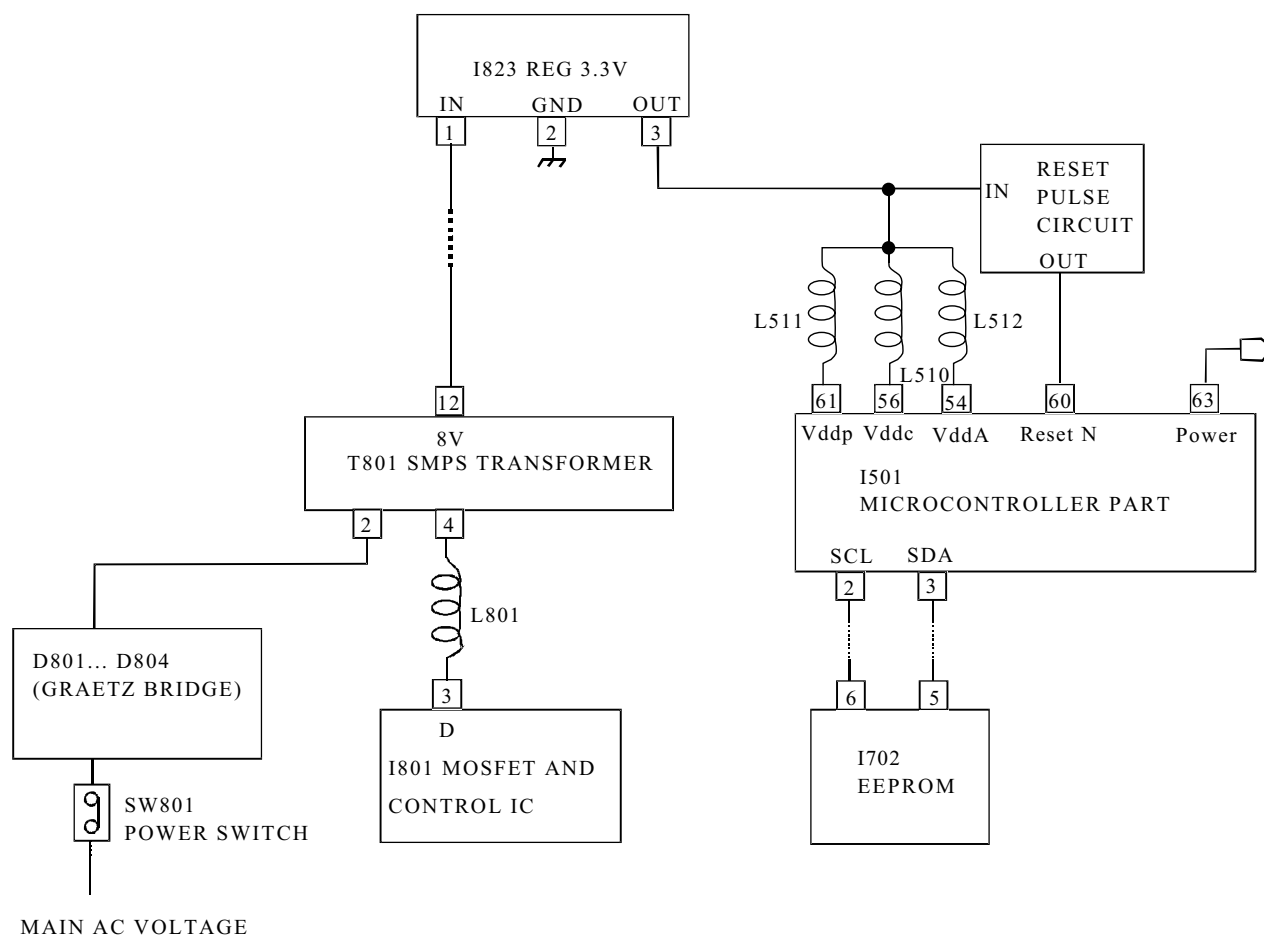

Start-up operations



* TV start-up and microcontroller initialization

- When SW801 power switch is pushed, main AC voltage is applied to T801 transformer (after rectification by D801...D804 diodes). Then, T801 SMPS transformer starts operating and supplies DC voltage to I823 (3.3V regulator).
- This regulator provides 3.3V DC voltage to I501 microcontroller power supply pins (pins 54, 56, 61) and to the reset pulse circuit which provides reset pulse to I501 microcontroller reset pin (pin 60).
- Then, the microcontroller starts its initialization. Its power pin (pin 63) is set to high which allows delivery of power supply voltages (123V, 8V, 5V...). At this step, all IC's start working but no picture appears on screen: I501 IC doesn't provide horizontal drive voltage.
- Then, the microcontroller consults I702 EEPROM via I2C bus to know the last TV set mode (normal run mode or stand-by mode) before switching off.

. If the TV set was on normal run mode before switching off, the microcontroller delivers horizontal drive voltage at pin 33 and picture appears on screen.

. If the TV set was on stand-by mode before switching off, the microcontroller switches TV set to stand-by mode, decreasing power pin voltage (pin 63). This matter will be explained on paragraph 5-9-2-b.

*** Reset pulse circuit**

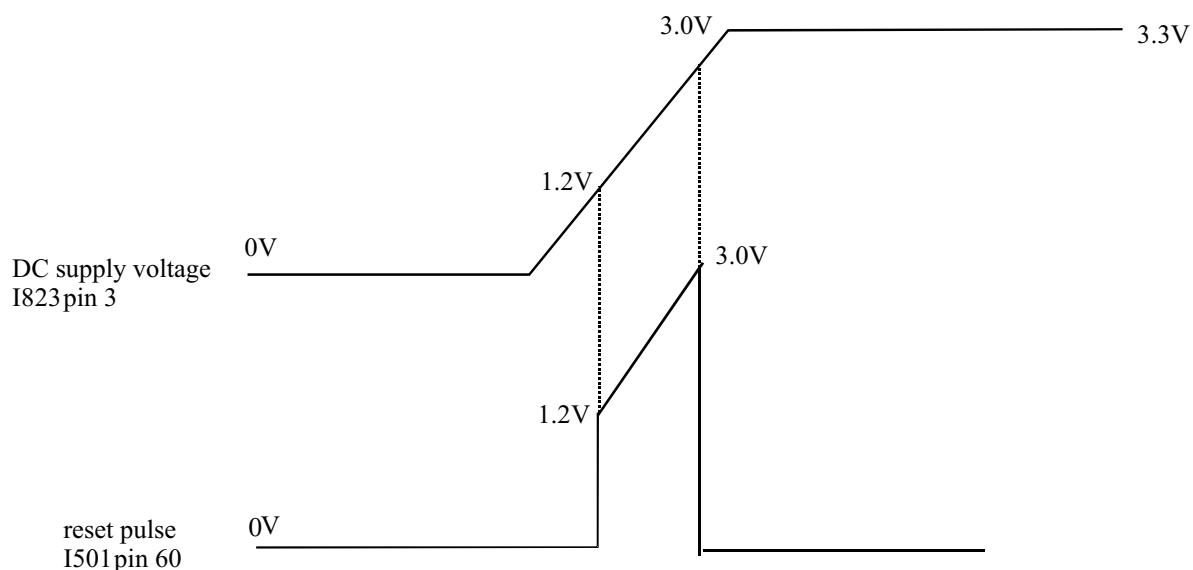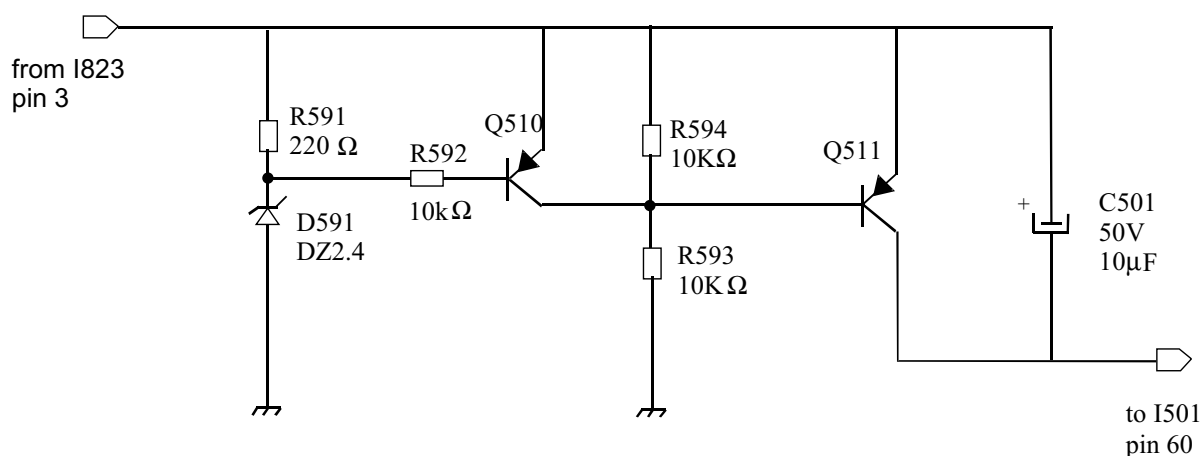

Reset pulse circuit and corresponding waveforms

* Reset pulse circuit operations description

- When DC supply voltage from I823 regulator starts rising (from 0V to 1.2V), no current flows through D591 zener diode. So, Q510 is in off mode.

Also $V_{be\ Q511} = V_{cc}/2 - V_{cc} = -V_{cc}/2 > -0.6V$. So, Q511 is in off mode.

Then, no voltage reaches I501 pin 60.

- When this voltage reaches 1.2 V, Q510 stays in off mode

but $V_{be\ Q511} = -0.6V$. So, Q511 is switched on and starts driving DC supply voltage to I501 pin 60.

- When the DC supply voltage reaches $(2.4V + 0.6V) = 3.0V$, Q510 starts conducting but as the Q511 base-emitter voltage is the same as the collector-emitter voltage of the saturated Q510, Q511 switches off and no voltage reaches I501 pin 60.

- If the DC supply voltage decreases below 3 V, Q510 switches off immediately. Q511 starts conducting, pulling I501 pin 60 high.

At the same time, it discharges the reset capacitor C501. Discharging this capacitor is necessary to guarantee a defined reset pulse duration.

5-9-2 TV normal run and stand-by mode operations


Depending on remote control commands, I501 microcontroller part pin 63 (power) is set to:

- high for normal run mode
- low for stand-by mode

a) TV on normal run mode

* I501 microcontroller part pin 63 (power) effect

I501 microcontroller part pin 63 (power) is connected to the following circuit:

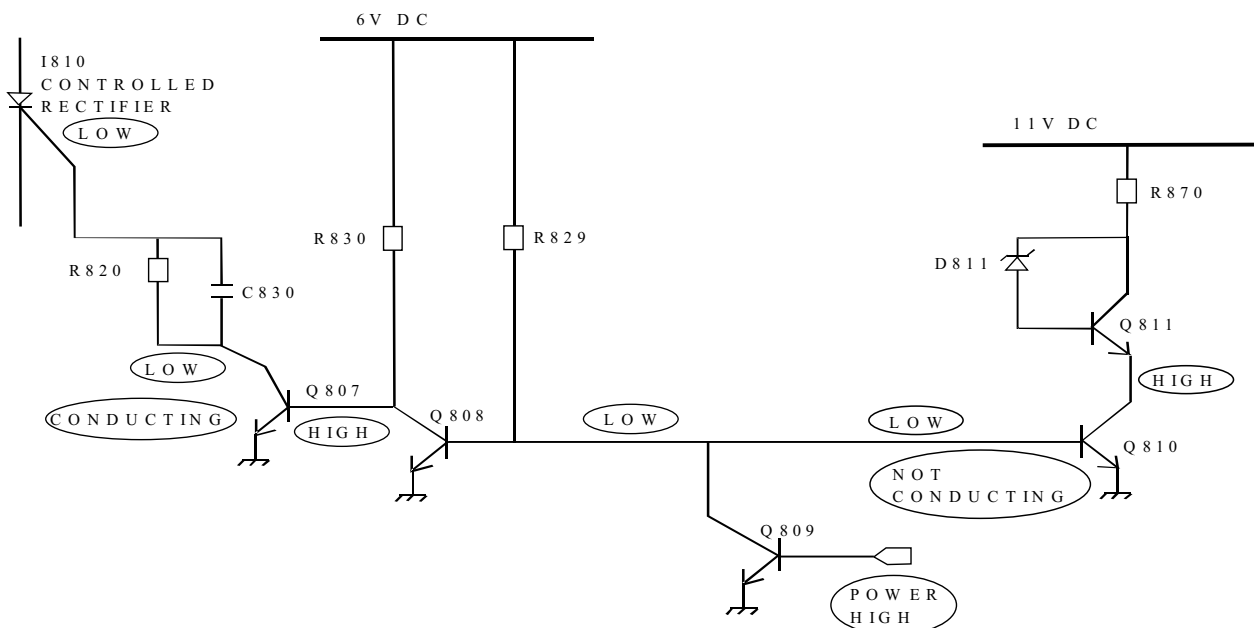

I501 microcontroller part pin 63 (POWER) effect

On normal run mode, I501 microcontroller pin 63 (power) is set to high

So, I810 controlled rectifier is not conducting


- Q809 is conducting. So, Q808 is not conducting and Q807 is conducting
- So, Q807 collector is connected to the ground and I810 controlled rectifier gate pin is set to low (no conducting)

So, current from 11V DC voltage (from T801 SMPS transformer pin 13) does not flow through Q811 and Q810 transistors but flows through I806 IC error amplifier

- Q809 is conducting. So, Q810 is not conducting and no current flows from Q810 collector to the ground

Therefore, the power supply circuit diagram is the one shown on the next paragraph

* power supply circuit diagram during TV set normal run

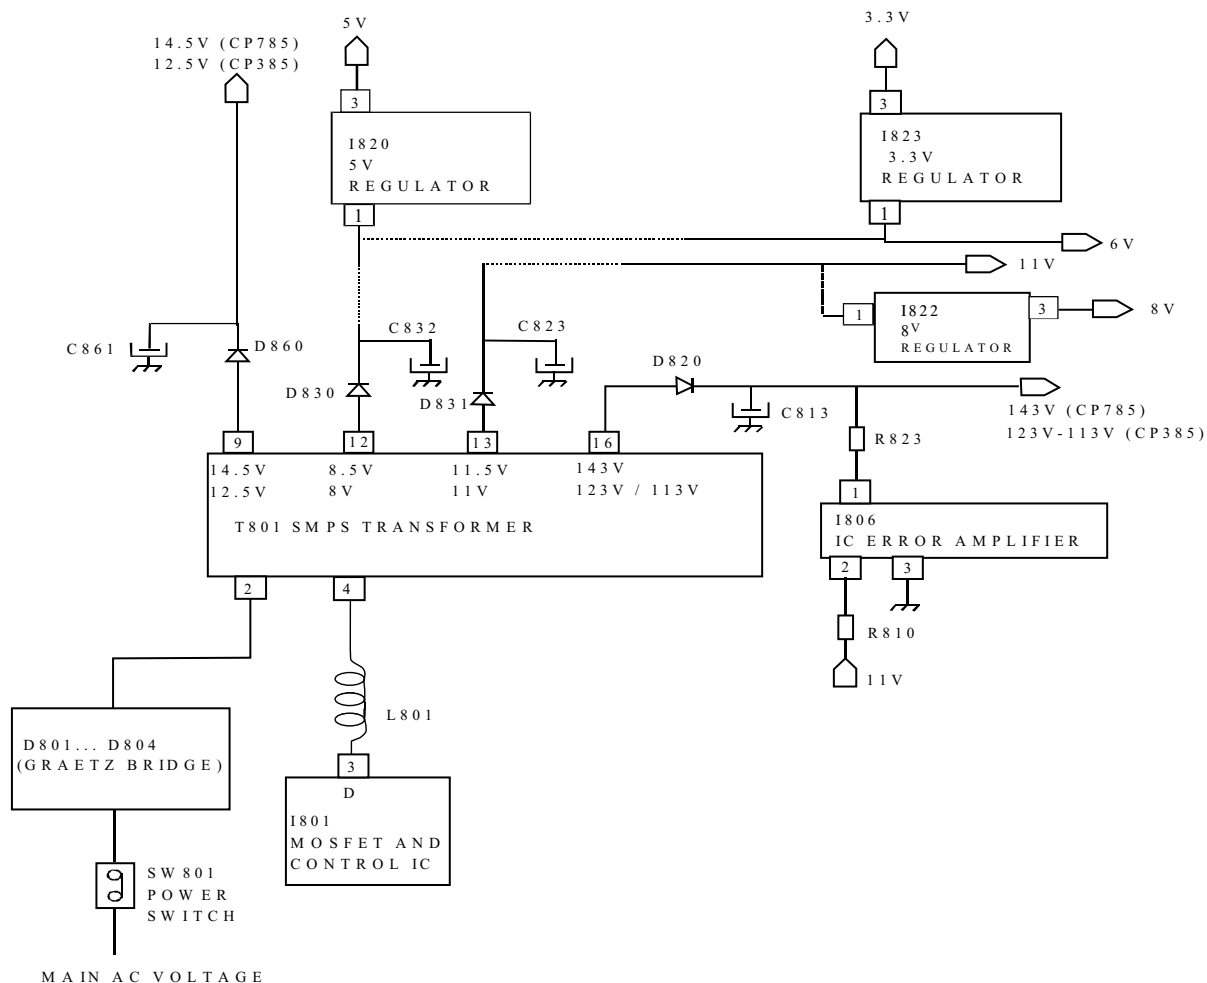

Power supply operation during TV set normal run

* power supply functioning during TV set normal run mode


- I801 transmits controlled pulses to T801 which generates DC voltages after rectifications by secondary part diodes and electro capacitors (by example by D820 and C813 on 143V supply voltage line).
- 8V, 5V, 3.3V supply voltage lines have stabilized voltages obtained by I820, I822, I823 voltage regulators.
- On 143V supply voltage line, R823 resistor has been chosen to reach exact DC voltage required on this line.
- 143V supply voltage line includes an IC error amplifier (I806) which corrects unexpected DC voltage variations on this line.

* power supply IC delivery during TV set normal run


power supply line	IC power supply delivery	Remarks
143V	FBT	FBT supplies 45V to I301 vertical IC FBT supplies 45V to T401 H- drive FBT supplies 14V to I301 vertical IC FBT supplies 33V to the tuner FBT supplies 185V to I901 video amplifier pin 6
12.5V	I602 sound amplifier pins 3-16	
11V	T401 H- drive	
8V	I501 Main IC pins 14-39 I601 Sound Demod pins 38-39-40	
6V	I703 IR receiver pin 1 I601 Sound Demod pins 7-18-57	
5V	I702 EEPROM pin 8 tuner	
3.3V	Main IC com part pins 54-56-61	

b) TV set on stand-by mode

* TV set circuit diagram on stand-by mode

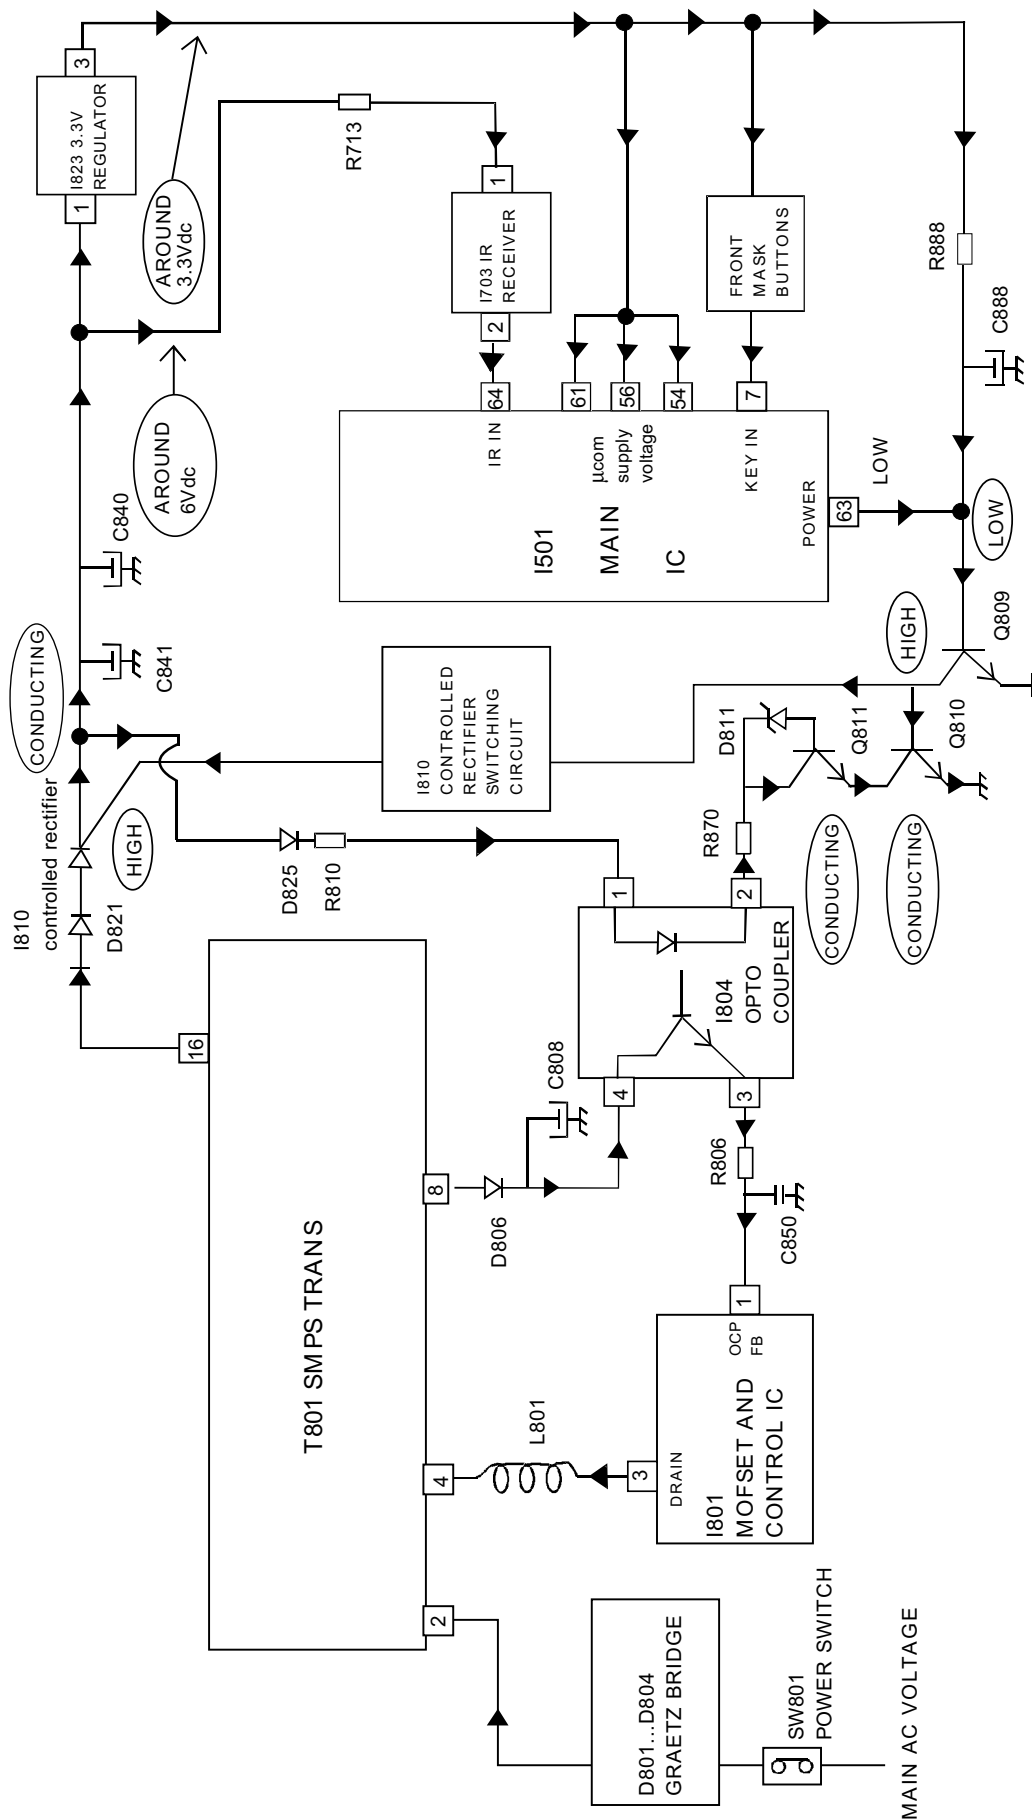

Power supply operation in stand - by mode

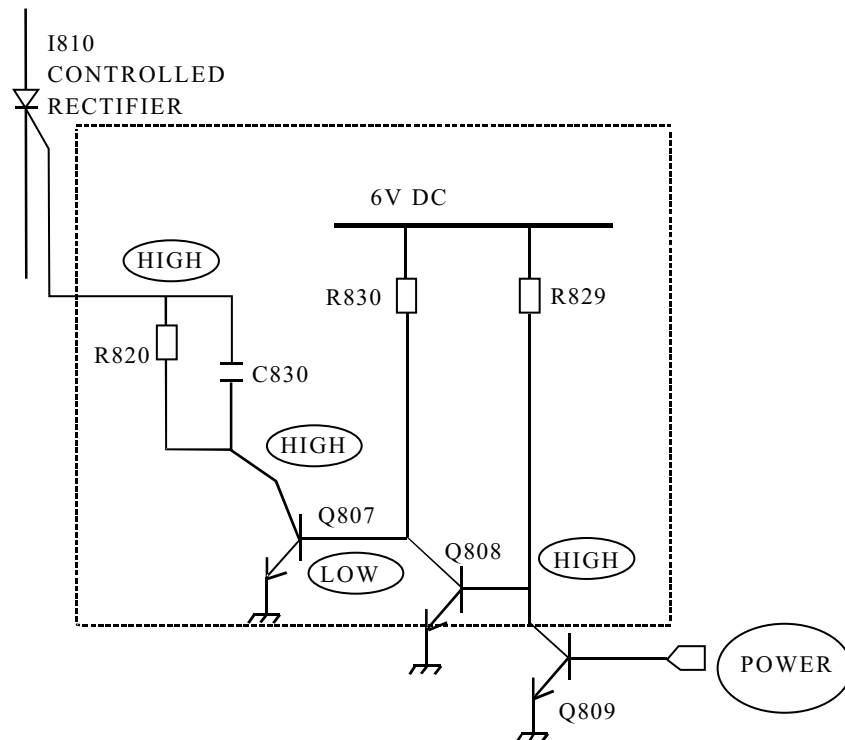

I810 controlled rectifier switching circuit

* TV set stand-by mode operations

- On stand-by mode, I501 microcontroller pin 63 (power) is set to low.
- So, Q809 collector is set to high.
- Then, I810 controlled rectifier gate pin is set to high and I810 is conducting.
- So, current flows from pin 16 SMPS transformer to the ground via I804 optocoupler and Q810 and Q811 transistors (which are conducting).
- In these conditions, I801 delivers pulses on light mode and T801 produces voltages with reduced power.
- As I810 is conducting, current flows also from pin 16 SMPS transformer to I823 (3.3V regulator) for I501 com, IR receiver and front mask buttons supply voltage (then, remote control or front mask buttons can be activated to leave stand-by mode).

6. Service Parts List

LOC	PART NAME	PART Code	PART Description	Remark
ZZ100	TRANSMITTER REMOCON	48B4744N08	R-44N08 (AA)	With Text (RD-D90)
		48B4744N09	R-44N09 (AA)	Without Text (RD-D85)
00010	BATTERY	4850Q00810	R6P/LN	
00030	CABLE SCART	4859000160	S-RCA 3P/DIN 4P(1.2M)	FS-xxT90 only
ZZ120	COVER BACK AS	PTBCSHD393	DTE-29G5TH	FS-68T90
		PTBCSHD392	DTE-25G5THS	FS-59T90
		PTBCSHD635	DTE-29G4ZH	FS-68V81
		PTBCSHD634	DTE-25G4ZH	FS-59V81
ZZ131	CRT GROUND NET	48519A4210	2901H-1015-2P	29 inch (2pin Type - old)
		48519A6410	2901S-1015-1P	29 inch (1pin Type - New)
		48519A4010	2501H-1015-2P	25 inch (2pin Type - old)
		48519A6310	2501S-1015-1P	25 inch (1pin Type - New)
ZZ132	COIL DEGAUSSING	58G0000145	DC-29S2	29 inch
		58G0000144	DC-25S2	25 inch
V901	CRT	4859633867	A68KTB359X010(B) M50	29 inch (6pin DY - old)
		4859633769	A68KTB359X001(B) M50	29 inch (4pin DY- New)
		4859629569	A59KPR84X02(D) M50	25 inch (6pin DY - old)
		4859629069	A59KPR84X01(D) M50	25 inch (4pin DY- New)
ZZ200	MASK FRONT AS	PTFMSJD393	DTE-29G5TH	FS-68T90
		PTFMSJD392	DTE-25G5THS	FS-59T90
		PTFMSJD635	DTE-29G4ZH	FS-68V81
		PTFMSJD634	DTE-25G4ZH	FS-59V81
P601A	CONNECTOR	4850704S32	YH025-04+YRT205+ULW900500	FS-xxT90 only
SP02	SPEAKER	4858310810	F2250C-2141	FS-xxT90 only
SP01	SPEAKER	4858310810	F2250C-2141	FS-xxT90 only
	SPEAKER SYSTEM	48A8304800	SS-78128F04 10W 8OHM	FS-xxV81 only
ZZ230	PCB Main Assembly	PTMPMSD393	DTE-29G5TH (OLD)	FS-68T90 (OLD)
		PTMPMSD694	DTE-29G5TH (NEW)	FS-68T90 (NEW)
		PTMPMSD392	DTE-25G5THS (OLD)	FS-59T90 (OLD)
		PTMPMSD695	DTE-25G5THS (NEW)	FS-59T90 (NEW)
		PTMPMSD634	DTE-29G4ZH	FS-68V81
		PTMPMSD635	DTE0-25G4ZH	FS-59V81
ZZ290	PCB Control Assembly	PTCTSWD634	DTE-29G4ZH	FS-xxV81 only

* Note 1 : Detail Parts List of Main Assembly

- 6-4-1. Old Main PCB Assembly Parts List (for old FS-xxT90 Models)
- 6-4-2. New Main PCB Assembly Parts List (for new FS-xxT90,xxV81 Models) ”
- 6-4-3. Control PCB Assembly Parts List (for FS-xxV81 Models)

* Note 2 : Difference Parts List for Each Models

- 6-1. PCB Difference Parts List (for PCB Change of FS-xxT90 Models)
- 6-2. CRT Difference Parts List
- 6-3. Function & Cabinet Difference Parts List

6-1. PCB Difference Parts (PCB Change of FS-xxT90)

- Applied models : FS-xxT90 only (FS-59T90, 68T90)
- FS-xxV81 have been applied from first products.

6-1-1. PCB Difference Parts (1)

Loc.	Part Name	Before the Change OLD PCB (4859804393)		After the Change NEW PCB (4859806493)		Remark	Refer to
		Part Code	Part Description	Part Code	Part Description		
ZZ290	Main PCB assembly	PTMPMSD393	DTE-29G5TH	PTMPMSD694	DTE-29G5TH (new)	PCB Assembly Change due to PCB change - FS68T90 : PTMPMSD393 ==> PTMPMSD694 - FS59T90 : PTMPMSD392 ==> PTMPMSD695	none
ZZ290	Main PCB assembly	PTMPMSD392	DTE-25G5THS	PTMPMSD695	DTE-25G5THS (new)		
A001	PCB MAIN	4859804393	330X246 S1L	4859806493	330X246 S1B	2 Different types of PCB	none
C103	C CERA	CCZB1H102K	50V B 1000PF K	CCXB1H102K	50V B 1000PF K		
C108	C CERA	CCZB1H101K	50V B 100PF K	CCXB1H101K	50V B 100PF K	2 Different types (Axial Type ==> Radial Type)	none
C120	C CERA	CCZB1H102K	50V B 1000PF K	CCXB1H102K	50V B 1000PF K		
C513	C CERA	CBZF1H104Z	50V F 0.1MF Z	CBXF1H104Z	50V F 0.1MF Z		
C518	C CERA	CBZF1H104Z	50V F 0.1MF Z	CBXF1H104Z	50V F 0.1MF Z		
C523	C CERA	CBZF1H104Z	50V F 0.1MF Z	CBXF1H104Z	50V F 0.1MF Z		
C529	C CERA	CBZF1H104Z	50V F 0.1MF Z	CBXF1H104Z	50V F 0.1MF Z		
C533	C CERA	CCZB1H102K	50V B 1000PF K	CCXB1H102K	50V B 1000PF K		
C534	C CERA	CCZF1H223Z	50V F 0.022MF Z	CCXF1H223Z	50V F 0.022MF Z		
C535	C CERA	CCZF1H223Z	50V F 0.022MF Z	CCXF1H223Z	50V F 0.022MF Z		
C536	C CERA	CCZF1H223Z	50V F 0.022MF Z	CCXF1H223Z	50V F 0.022MF Z		
C577	C CERA	CCZB1H561K	50V B 560PF K	CCXB1H561K	50V B 560PF K	2 Different types (Radial Type ==> Axial Type)	none
C650	C CERA	CZSL1H470J	50V SL 47PF J	CXCH1H470J	50V CH 47PF J		
C698	C CERA	CZSL1H470J	50V SL 47PF J	CXCH1H470J	50V CH 47PF J		
C699	C CERA	CZSL1H470J	50V SL 47PF J	CXCH1H470J	50V CH 47PF J		
C771	C CERA	CBZF1H104Z	50V F 0.1MF Z	CBXF1H104Z	50V F 0.1MF Z		
C809	C CERA	CCZB1H102K	50V B 1000PF K	CCXB1H102K	50V B 1000PF K		
C830	C CERA	CBZF1H104Z	50V F 0.1MF Z	CBXF1H104Z	50V F 0.1MF Z		
C665	C CERA	CCXB1H472K	50V B 4700PF K	CBZR1C472M	16V Y5R 4700PF M		
C667	C CERA	CCXB1H472K	50V B 4700PF K	CBZR1C472M	16V Y5R 4700PF		

== Continue to Next Page ==

Loc.	Part Name	Before the Change OLD PCB (4859804393)		After the Change NEW PCB (4859806493)		Remark	Refer to
		Part Code	Part Description	Part Code	Part Description		
Q103	TR	TKTC3202Y-	KTC3202Y (TP)	***** Delete	*****	Unnecessary Circuits - SECAM-L ' circuits - FS-xxT90 & xxV81 do not support SECAM-L '	none
C110	C CERA	CCZB1H102K	50V B 1000PF K	***** Delete	*****		
D102	DIODE	D1SS85TA--	1SS85TA	***** Delete	*****		
R113	R CARBON FILM	RD-AZ562J-	1/6 5.6K OHM J	***** Delete	*****		
R114	R CARBON FILM	RD-AZ562J-	1/6 5.6K OHM J	***** Delete	*****		
R117	R CARBON FILM	RD-AZ222J-	1/6 2.2K OHM J	***** Delete	*****		
D404	DIODE	DRGP30J---	RGP30J	DRGP15J---	RGP15J	Change 1 RGP30J ==> 2 RGP15J for auto insertion	none
D406	DIODE	***** Add	*****	DRGP15J---	RGP15J		
D820	DIODE	DRGP30J---	RGP30J	DRGP15J---	RGP15J	Change 1 RGP30J ==> 3 RGP15J for auto insertion (Rectifier of Main B+ Voltage)	none
D819	DIODE	***** Add	*****	DRGP15J---	RGP15J		
D818	DIODE	***** Add	*****	DRGP15J---	RGP15J		
D860	DIODE	DRGP30J---	RGP30J	DRGP15J---	RGP15J	Change 1 RGP30J ==> 3 RGP15J for auto insertion (Rectifier of Sound B+ Voltage)	none
D861	DIODE	***** Add	*****	DRGP15J---	RGP15J		
D862	DIODE	***** Add	*****	DRGP15J---	RGP15J		
R398	R FUSIBLE	RF01Z828JA	1W 0.82 OHM J A	RD-2Z129J-	1/2 1.2 OHM J	Change 0.82 ohm ==> 1.2ohm & 2.7ohm parallel (Exclusive using componmt ==> Normal using components)	none
R393	R CARBON FILM	***** Add	*****	RD-2Z279J-	1/2 2.7 OHM J		
I822	IC REGULATOR	1KA7808---	KA7808	***** Delete	*****		
Q822	TR	***** Add	*****	TKTC3205Y-	KTC3205Y (TP)		
D891	DIODE	***** Add	*****	D1N4148---	1N4148	Change 8V Regulator IC ==> Circuits (1 of Manual Insertion componets is deleted)	none
D892	DIODE ZENER	***** Add	*****	DUZ8R2BL--	UZ-8.2BL		
R842	R CARBON FILM	***** Add	*****	RD-2Z479J-	1/2 4.7 OHM J		
R843	R CARBON FILM	***** Add	*****	RD-AZ561J-	1/6 560 OHM J		
I805	IC	1UPC574J--	UPC574J	***** Delete	*****	Change 33V Zener diode (Radial Type ==> Axial Type) (Exclusive using componmt ==> Normal using components)	none
D890	DIODE ZENER	***** Add	*****	DUZ33B---	UZ-33B	Improve the unnormal oscillation of Sound output wave when particular speakers are applied. (FS-xxT90 : don't care but unification of circuits)	none
C663	C MYLAR	***** Add	*****	CMXM2A103J	100V 0.01MF J		
C664	C MYLAR	***** Add	*****	CMXM2A103J	100V 0.01MF J		
R663	R CARBON FILM	***** Add	*****	RD-4Z829J-	1/4 8.2 OHM J		
R664	R CARBON FILM	***** Add	*****	RD-4Z829J-	1/4 8.2 OHM J		

6.1-2 PCB Difference Parts (2)

Loc.	Part Name	Before the Change OLD PCB (4859804393)		After the Change NEW PCB (4859806493)		Remark	Refer to
		Part Code	Part Description	Part Code	Part Description		
T402	FBT	50H0000181	1352.5008E	50H0000247	FFA64028L	- New FBT have additional PIN - New FBT is not inserted in the Old PCB 485980439	Page 56
V901	CRT	4859633867	A68KTB359X010(B) M50	4859633769	A68KTB359X001(B) M50	Change DY connector (6pin type ==> 4pin type)	
V901	CRT	4859629569	A59KPR84X02(D) M50	4859629069	A59KPR84X01(D) M50	1. Old (A68KTB359X010 & A59KPR84X02)	
N401	TERM PIN	***** Add	*****	4857417500	DA-IB0214(D2.3/DY PIN)	- 6 pin DY connector ==> applied to old PCB	
N402	TERM PIN	***** Add	*****	4857417500	DA-IB0214(D2.3/DY PIN)	- Available old PCB & New PCB assembly	
N403	TERM PIN	***** Add	*****	4857417500	DA-IB0214(D2.3/DY PIN)	2. New (A68KTB359X001 & A59KPR84X01)	Page 57
N404	TERM PIN	***** Add	*****	4857417500	DA-IB0214(D2.3/DY PIN)	- 4 pin DY connector ==> applied to old PCB	
P402	CONN WAFER	4859240120	YFW500-06	***** Delete	*****	- Old PCB assembly do not support 4 pin DY connector	
P904	CONN WAFER	4859238620	YPW500-02	***** Delete	*****	Change CRT Ground Net (2pin Type ==> 1pin Type)	
ZZ131	CRT GND NET	48519A4210	2901H-1015-2P	48519A6410	2901S-1015-1P	1. Old (2901H-1015-2P, 2501H-1015-2P)	Page 58
ZZ131	CRT GND NET	48519A4010	2501H-1015-2P	48519A6310	2501S-1015-1P	- 2 pin Type ==> Inserted in the P904	
I806	IC ERROR AMP	1SE130N---	SE130N	1DP142----	DP142	2. New (2901S-1015-1P, 2501S-1015-1P)	
R823	R CARBON FILM	RD-4Z512J-	1/4 5.1K OHM J	RD-4Z331J-	1/4 330 OHM J	- 1pin Type : Inserted in the CRT socket (SCT1)	
I801	IC SMPS	1STRF6654-	STR-F6654	1STRF6653-	STR-F6653	Change Error Amp of Main B+(142V)	Page 59
Q401	TR	T2SD2553--	2SD2553	TST2009DH1	ST2009DHI	- SE130N : R823 must be 5.1K ohm for 142V	
Q402	TR	T2SD1207T-	2SD1207-T	TKTC3229--	KTC3229	- DP142 & SE140N : R823 must be 330 ohm for 142V	
R406	R M-OXIDE FILM	RS02Z561JS	2W 560 OHM J SMALL	RS02Z271JS	2W 270 OHM J SMALL	compatible	Don't care
D810	DIODE	DRGP15J----	RGP15J	85801065GY	AWG22 1/0.65	compatible	Don't care
L650	COIL BEAD	5MC0000100	HC-3550	85801065GY	AWG22 1/0.65	KTC3229 : available both old & New PCB	Page 59
L803	COIL BEAD	5MC0000100	HC-3550	85801065GY	AWG22 1/0.65	- If R406=560 ohm (old PCB) then both 2SD1207 & KTC3229 are available	
						- If R406=270 ohm (new PCB) then KTC3229 are available	
						Unnecessary Component	Don't care
						Unnecessary Component	Don't care
						Unnecessary Component	Don't care

== Continue to Next Page ==

Loc.	Part Name	Before the Change OLD PCB (4859804393)		After the Change NEW PCB (4859806493)		Remark	Refer to
		Part Code	Part Description	Part Code	Part Description		
R710	R CARBON FILM	RD-AZ431J-	1/6 430 OHM J	RD-AZ201J-	1/6 200 OHM J	Exapntion of Improvement of FS-xxV81 (LED brightness are increased)	Don't Care
R711	R CARBON FILM	RD-AZ431J-	1/6 430 OHM J	RD-AZ271J-	1/6 270 OHM J	Exapntion of Improvement of FS-xxV81 (The AGC response are increased)	Don't Care
C106	C ELECTRO	CEXF1C221V	16V RSS 220MF (8X11.5) TP	CEXF1H220V	50V RSS 22MF (5X11) TP	Exapntion of Improvement of MSP3465 problem (FS-xxV81) - FS-xxT90 (MSP3415D) : Don't care condition "	Don't Care
C888	C ELECTRO	CEXF1C470V	16V RSS 47MF (5X11) TP	*****Delete *****		Change components for Auto-unserion in the production line & Increase the Ripple current margin of C814 "	Don't Care
C813	C ELECTRO	CEYF2D101V	200V RSS 100MF (16X31.5)	CEXF2C101V	160V RSS 100MF (16X25) TP	compatible	Don't Care
C814	C ELECTRO	CEXF2E470V	250V RSS 47MF (16X25) TP	CEXF2C101V	160V RSS 100MF (16X25) TP	Change old part code to new part code (component is same)	Don't Care
C805	C ELECTRO	CEYN2W151P	450V LHS 150MF (25X40)	CEYN2G181P	400V LHS 180MF (25X35)	Diode Maker's Package change	Don't Care
C812	C CERA AC	CH1AFE472M	4KV 4700PF M KX DE1610	CH1BFE472M	AC400V 4700PF M U/C/V		Don't Care
D403	DIODE	DDG3-----	DG3	DDGP30L---	DGP30L		Don't Care


6-1-3. Detail Information of Some Component Change of FS-xxT90 (ECN)

(1) FBT Change


- New FBT is electrically compatible for FS-xxT90,xxV81 and PF51T30 ”
- But, New FBT have additional pin for FOCUS Ground
- So, New FBT is not inserted in the Old PCB 4859804393

Loc.	Part Name	Before the Change		After the Change		Applying Date	Remark
		Part Code	Part Description	Part Code	Part Description		
T402	FBT	50H0000181	1352.5008E	50H0000247	FFA64028L	From New PCB	New FBT do not inserted in the old PCB

Old FBT
(1352.5008E)

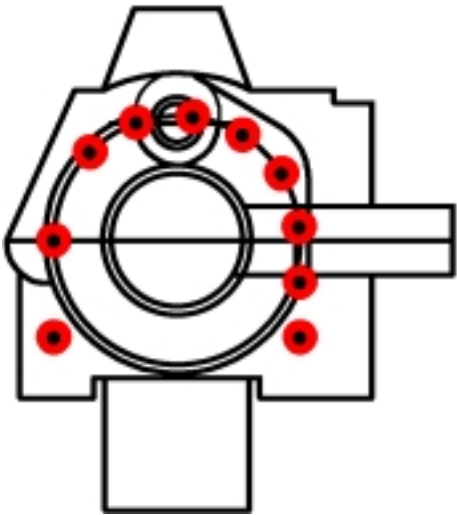

New FBT
(RRA64028L)

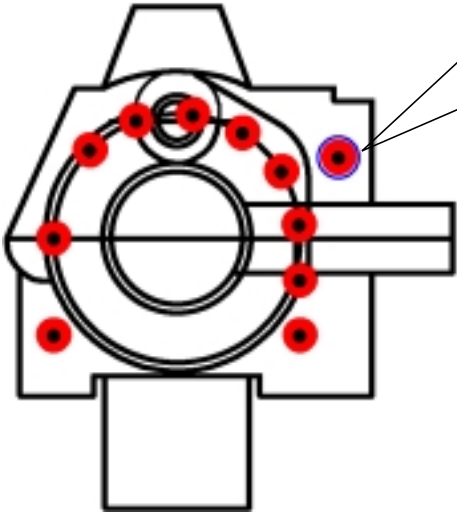

Additional Hole
(FOCUS GND)



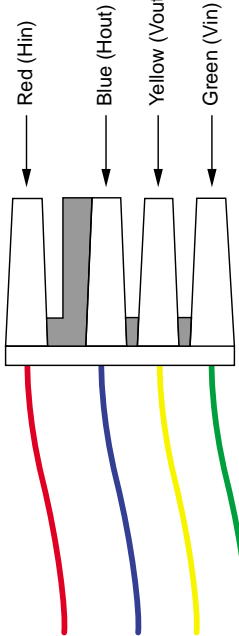
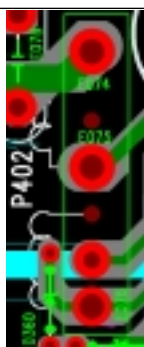
(2) DY Connector Change

- New DY connector (4pin type) will be applied form New PCB
- All of Electronic characteristic is same

Loc.	Part Name	Before the Change		After the Change		Applying Date	Remark
		Part Code	Part Description	Part Code	Part Description		
V901	CRT	4859633867	A68KTB359X010(B) M50	4859633769	A68KTB359X001(B) M50	From New PCB	DY connector (in the CRT) & DY Wafer (in the Main PCB) will be change at the same time
		4859629569	A59KPR84X02(D) M50	4859629069	A59KPR84X01(D) M50		
P402	CONN WAFER	4859240120	YFW500-06	***** Delete *****			
N401,402,403,404	TERM PIN	***** Add *****		4857417500	DA-IB0214(D2.3(DY PIN)		
Comparison		- DY connector : 6 pin type - P402 is used"		- DY connector : 4 pin type - N401~404 are used			


- If new PCB apply to Old CRT set : Replace the P401 wafer of old PCB to the New PCB P401

- If new CRT apply to old PCB set : Change the New CRT's DY connecto to old set's DY connector

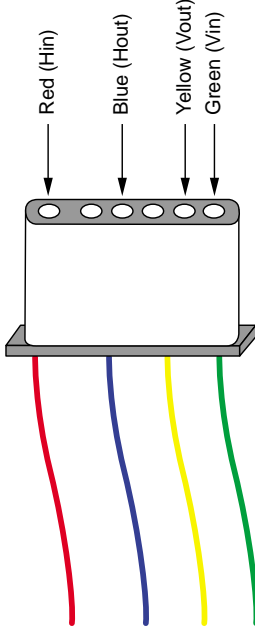6 pin DY Connector		Old CRTs A59KPR84X02 A68KTB359X010 DY wafer : YFW500-06	PCB Hole & Pattern for DY connentor	
			New PCB 4859806493 (FS-xxV81)	 4 pin Type DY : available 6 pin Type DY : available
4 pin DY Connector		New CRTs A59KPR84X01 A68KTB359X001 DY wafer : 4pin Terminal	Old PCB 4859804393 (FS-xxT81)	 4 pin Type DY : Impossible 6 pin Type DY : available

(3) CRT Ground Net Change

- New CRT GND Net (1pin type) will be applied form New PCB
- New CRT GND Net (1pin type) do not need P904

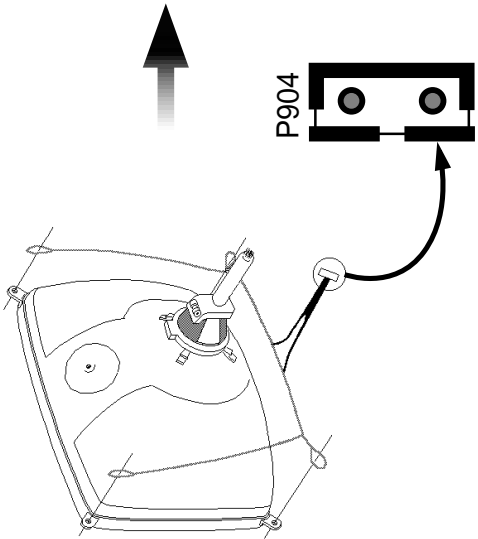	Before (old CRT Ground Net)	New CRT Ground Net
CRT Ground NET	29 inch : 2901H-1015-2P (48519A4210) 25 inch : 2501H-1015-2P (48519A4010)	29 inch : 2901S-1015-1P (48519A6410) 25 inch : 2501S-1015-1P (48519A6310)
P904 (Wafer)	YPW500-02 (4859238620)	*****Delete *****
Applied Models	Current FS-xxT90 (FS-8002)	" FS-xxV81, FS-xxT90 will be applied "
	old CRT Ground Net ==> Inserted to P904	new CRT Ground Net ==> Inserted to SCT Socket (SCT1)
Connection		

- New CRT GND Net (1pin type) will be applied form New PCB
- If old PCB apply to New set : No Problem
- If New PCB apply to old set

- Method 1 : Replace the P904(Wafer) of old set to P904 of the New PCB
- Method 2 : Change the wire of old CRT GND NET looks like New CRT GND Net and use it

(4) Others

- These Technical Changes are applied from New PCB

No.	Changing Item	Loc.	Part Name	Before the Change		After the Change		Remark
				Part Code	Part Description	Part Code	Part Description	
1	Error Amp	I806	IC ERROR AMP	1SE130N----	SE130N	1DP142----	DP142	Change Error Amp of Main B+(142V) - SE130N : R823 must be 5.1K ohm for 142V - DP142 & SE140N : R823 must be 330 ohm for 142V
	Change	R823	R CARBON FILM	RD-4Z512J-	1/4 5.1K OHM J	RD-4Z331J-	1/4 330 OHM J	
2	H-Drive	Q402	TR	T2SD1207T-	2SD1207-T	TKTC3229--	KTC3229	KTC3229 : available both old & New PCB - If R406=560 ohm (old PCB) then both 2SD1207 & KTC3229 are available - If R406=270 ohm (new PCB) then KTC3229 are available
	Resister	R406	R M-OXIDE FILM	RS02Z561JS	2W 560 OHM J s	RS02Z271JS	2W 270 OHM J S	

No.1 : For more high sensitivity of Main B+ feedback (by reducing of R823)

No.2 : For more small operating temperature of Q401 (by reducing of R406, H-drive Bias voltage increasing)

6-2. Difference Parts for CRT

Ass'y	LOC	PART NAME	29 inch (FS-68xxx)		25 inch (FS-59xxx)	
			PART CODE	PART Description	PART CODE	PART Description
COVER BACK	ZZ120	COVER BACK AS	PTBCSHD393	DTE-29G5TH	PTBCSHD392	DTE-25G5THS
			PTBCSHD634	DTE-29G4ZH	PTBCSHD635	DTE-25G4ZH
MASK FRONT	ZZ200	MASK FRONT AS	PTFMSJD393	DTE-29G5TH	PTFMSJD392	DTE-25G5THS
			PTFMSJD634	DTE-29G4ZH	PTFMSJD635	DTE-25G4ZH
CRT	ZZ131	CRT GROUND NET	48519A4210	2901H-1015-2P	48519A4010	2501H-1015-2P
			48519A6410	2902S-1015-1P	48519A6310	2502S-1015-1P
	ZZ132	COIL DEGAUSSING	58G0000145	DC-29S2	58G0000144	DC-25S2
	V901	CRT	4859633867	A68KTB359X010(B) M50	4859629569	A59KPR84X02(D) M50
MAIN PCB			4859633769	A68KTB359X001(B) M50	4859629069	A59KPR84X01(D)M50
	C402	C MYLAR	CMYH3C123J	1.6KV BUP 0.012MF J	CMYH3C912J	1.6KV BUP 9100PF J
	C404	C MYLAR	CMYH3C722J	1.6KV BUP 7200PF J	CMYH3C692J	1.6KV BUP 6900PF J
	C408	C MYLAR	CMYE2G624J	400V PU 0.62MF J	CMYE2G434J	400V PU 0.43MF J
	L401	COIL H-LINEARITY	58H0000065	TRL-140D	58H0000025	TRL-330
	R350	R METAL FILM	RN-4Z1501F	1/4 1.50K OHM F	RN-4Z1801F	1/4 1.80K OHM F
	R351	R METAL FILM	RN-4Z1501F	1/4 1.50K OHM F	RN-4Z1801F	1/4 1.80K OHM F
	R556	R CARBON FILM	RD-AZ472J-	1/6 4.7K OHM J	RD-AZ512J-	1/6 5.1K OHM J
	R808	R CARBON FILM	RD-4Z911J-	1/4W 910 OHM J	RD-4Z102J-	1/4W 1K OHM J
	R920	R M-OXIDE FILM	RS01Z569J-	1W 5.6 OHM J (TAPPING)	RS01Z249J-	1W 2.4 OHM J (TAPPING)
		Models	- DTE-29xxxxx Serieese - FS-68T90,68V81"		- DTE-25xxxxx Serieese - FS-59T90,59V81	

6-3. Function & Cabinet Different Parts List

Ass'y	LOC	PART NAME	xxG5TH (FS-xxT90)	xxG4ZH (FS-xxV81)	Remark
Accessory	ZZ100	TRANSMITTER REMOCON	PART CODE 48B4744N08 R-44N08 (AA)	PART Description 48B4744N09 R-44N09 (AA)	- With Text & Without Text
	00030	CABLE SCART	4859000160 S-RCA 3P/DIN 4P(1.2M)	***** Not Used	- FS-xxT90 Support S/HS (Scart Jack)
COVER BACK	ZZ120	COVER BACK AS	PTBCSHD393 DTE-29G5TH	PTBCSHD634 DTE-29G4ZH	
			PTBCSHD392 DTE-25G5TH	PTBCSHD635 DTE-25G4ZH	
MASK FRONT	ZZ200	MASK FRONT AS	PTFMSJD393 DTE-29G5TH	PTFMSJD634 DTE-29G4ZH	
			PTFMSJD392 DTE-25G5TH	PTFMSJD635 DTE-25G4ZH	
SPEAKER Assembly	SP01	SPEAKER	4858310810 F2250C-2141	48A8304800 SS-78128F04 10W 8 OHM	
	SP02	SPEAKER	4858310810 F2250C-2141	-	- depends on Cabinet Structure
MAIN PCB Assembly	P601A	CONNECTOR	4850704S31 YH025-04+YRT205+ULW800400	-	
	I501	IC MICOM	1DW3653CH1 DW9365N2/3-CH1	1TDA9385N2 TDA9385PS/N2/3I	- With Text & Without Text
	I601	IC AUDIO	1MSP3415D- MSP3415D	1MSP3465V3 MSP3465G-PP-B8-V3	- Stereo & Mono
	JA01	WIRE COPPER	***** Deleted	85801065GY AWG22 1/0.65	
	JA03	WIRE COPPER	***** Deleted	85801065GY AWG22 1/0.65	
	JA02	WIRE COPPER	85801065GY AWG22 1/0.65	***** Deleted	- Depends on RCA output Jack
	JA04	WIRE COPPER	85801065GY AWG22 1/0.65	***** Deleted	
	JPA1	JACK PIN BOARD	4859110050 PH-JB-9614D	4859109250 PH-JB-9614A	
	JPA2	SOCKET RGB	4859200401 YRS21-R1	4859110950 YS01-0001	- FS-xxT90 use Scart Jack for Input-1
	D100	LED	DSD50RH51B SD50-RH51BGRW	***** In the Control PCB	
	D100M	HOLDER LED	4853533600 P.P BK	***** In the Control PCB	
	HP01	JACK EARPHONE	4859102130 YSC-1537	***** In the Control PCB	
	I703	IC PREAMP	1TS0P1238W TS0P1238W11	***** In the Control PCB	
	JPA3	JACK PIN BOARD	4859108450 YSC03P-4120-14A	***** In the Control PCB	
	SW700	SW TACT	5S50101090 THVH472GCA	***** In the Control PCB	
	SW701	SW TACT	5S50101090 THVH472GCA	***** In the Control PCB	
	SW702	SW TACT	5S50101090 THVH472GCA	***** In the Control PCB	
	SW703	SW TACT	5S50101090 THVH472GCA	***** In the Control PCB	
	SW704	SW TACT	5S50101090 THVH472GCA	***** In the Control PCB	
	SW801	SW POWER PUSH	5S40101143 PS3-22SP (P.C.B)	***** In the Control PCB	
	N005	TERM PIN	***** Deleted	***** In the Control PCB	
	N006	TERM PIN	***** Deleted	4857417500 DA-IB0214(D2.3DY PIN)	
	P602	CONN WAFER	***** Not Used	4857417500 DA-IB0214(D2.3DY PIN)	
	P701	CONN WAFER	***** Not Used	485923522S YW025-09 (STICK)	
CONTROL PCB	ZZ230	PCB CONTROL AS	***** Not Used	485923192S YW025-06 (STICK)	
			***** Not Used	PTCTSWD634 DTE-29G4ZH	- depends on Cabinet Structure

* These different Parts are available only New PCB (4859806493)

* The old PCB (4859804393) did not support FS-xx V81 seresease

6-4. All Electrical Parts List**6-4-1. Old Main PCB Assembly Parts List (for old FS-xxT90 Models)**

- The old Main Assembly will be changed. (October 2002)
- This old PCB do not support FS-xxV81 Models

LOC	PART NAME	PART Code	PART Description	Remark
A001	PCB MAIN	4859804393	330X246 S1L	
C101	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C102	C ELECTRO	CEXF1H470V	50V RSS 47MF (6.3X11) TP	
C103	C CERA	CCZB1H102K	50V B 1000PF K (AXIAL)	
C104	C CERA	CCXB1H102K	50V B 1000PF K (TAPPING)	
C106	C ELECTRO	CEXF1C221V	16V RSS 220MF (8X11.5) TP	
C108	C CERA	CCZB1H101K	50V B 100PF K (AXIAL)	
C110	C CERA	CCZB1H102K	50V B 1000PF K (AXIAL)	
C120	C CERA	CCZB1H102K	50V B 1000PF K (AXIAL)	
C121	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C305	C ELECTRO	CEXF1E471V	25V RSS 470MF (10X16) TP	
C313	C MYLAR	CMXM2A104J	100V 0.1MF J (TP)	
C315	C ELECTRO	CEXF2C470C	160V RUS 47MF (13X25) TP	
C320	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C350	C CERA	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	
C351	C CERA	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	
C370	C MYLAR	CMXM2A473J	100V 0.047MF J (TP)	
C401	C ELECTRO	CEXF1H100C	50V RUS 10MF (5X11) TP	
C402	C MYLAR	CMYH3C123J	1.6KV BUP 0.012MF J	29 inch
	C MYLAR	CMYH3C912J	1.6KV BUP 9100PF J	25 inch
C404	C MYLAR	CMYH3C722J	1.6KV BUP 7200PF J	29 inch
	C MYLAR	CMYH3C692J	1.6KV BUP 6900PF J	25 inch
C408	C MYLAR	CMYE2G624J	400V PU 0.62MF J	29 inch
	C MYLAR	CMYE2G434J	400V PU 0.43MF J	25 inch
C412	C ELECTRO	CEXF2C339C	160V RUS 3.3MF (8X11.5) TP	
C414	C MYLAR	CMXM2A104J	100V 0.1MF J (TP)	
C415	C ELECTRO	CEXF2E479V	250V RSS 4.7MF (10X16)TP	
C418	C CERA	CCXB1H102K	50V B 1000PF K (TAPPING)	
C420	C CERA	CCXB2H222K	500V B 2200PF K (TAPPING)	
C430	C MYLAR	CMYH3C122J	1.6KV BUP 1200PF J	
C431	C MYLAR	CMXE2D103J	200V PU 0.01MF J (TP)	
C440	C MYLAR	CMXE2G273J	400V PU 0.027MF J (TP)	
C499	C ELECTRO	CEYD1H689W	50V RHD 6.8MF (16X35.5)	
C509	C ELECTRO	CEXF1E470V	25V RSS 47MF (5X11) TP	
C511	C MYLAR	CMXM2A224J	100V 0.22MF J	
C512	C MYLAR	CMXM2A224J	100V 0.22MF J	
C513	C CERA SEMI	CBZF1H104Z	50V F 0.1MF Z	
C514	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C515	C CERA	CBZR1C222M	16V Y5R 2200PF M (AXIAL)	
C516	C CERA	CBZR1C472M	16V Y5R 4700PF M (AXIAL)	
C517	C ELECTRO	CEXF1H109V	50V RSS 1MF (5X11) TP	
C518	C CERA SEMI	CBZF1H104Z	50V F 0.1MF Z	
C519	C ELECTRO	CEXF1H109V	50V RSS 1MF (5X11) TP	

Service Manual CP-785A

LOC	PART NAME	PART Code	PART Description	Remark
C520	C CERA	CCZB1H102K	50V B 1000PF K (AXIAL)	
C521	C CERA	CCZB1H102K	50V B 1000PF K (AXIAL)	
C523	C CERA SEMI	CBZF1H104Z	50V F 0.1MF Z	
C524	C MYLAR	CMXL1J104J	63V MEU 0.1MF J	
C525	C CERA	CCXB1H102K	50V B 1000PF K (TAPPING)	
C526	C MYLAR	CMXL1J104J	63V MEU 0.1MF J	
C527	C MYLAR	CMXM2A473J	100V 0.047MF J (TP)	
C528	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C529	C CERA SEMI	CBZF1H104Z	50V F 0.1MF Z	
C530	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C531	C CERA	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	
C532	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C533	C CERA	CCZB1H102K	50V B 1000PF K (AXIAL)	
C534	C CERA	CCZF1H223Z	50V F 0.022MF Z	
C535	C CERA	CCZF1H223Z	50V F 0.022MF Z	
C536	C CERA	CCZF1H223Z	50V F 0.022MF Z	
C537	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C540	C ELECTRO	CEXF1H220V	50V RSS 22MF (5X11) TP	
C541	C ELECTRO	CEXF1H220V	50V RSS 22MF (5X11) TP	
C542	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C543	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C550	C ELECTRO	CEXF1H229V	50V RSS 2.2MF (5X11) TP	
C555	C ELECTRO	CEXF1C470V	16V RSS 47MF (5X11) TP	
C560	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C561	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C564	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C565	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C577	C CERA	CCZB1H561K	50V B 560PF K	
C585	C CERA	CCXB1H222K	50V B 2200PF K (TAPPING)	
C590	C CERA	CXCH1H270J	50V CH 27PF J (TAPPING)	
C591	C CERA	CXCH1H270J	50V CH 27PF J (TAPPING)	
C592	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C593	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C601	C CERA	CCXB1H472K	50V B 4700PF K (TAPPING)	
C602	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C603	C CERA	CCXB1H472K	50V B 4700PF K (TAPPING)	
C604	C ELECTRO	CEXF1E102V	25V RSS 1000MF (13X20) TP	
C605	C ELECTRO	CEXF1E470V	25V RSS 47MF (5X11) TP	
C608	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C610	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C611	C ELECTRO	CEXF1H339V	50V RSS 3.3MF (5X11) TP	
C612	C ELECTRO	CEXF1H109V	50V RSS 1MF (5X11) TP	
C613	C ELECTRO	CEXF1H109V	50V RSS 1MF (5X11) TP	
C614	C ELECTRO	CEXF1H109V	50V RSS 1MF (5X11) TP	
C615	C ELECTRO	CEXF1H109V	50V RSS 1MF (5X11) TP	
C616	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	

LOC	PART NAME	PART Code	PART Description	Remark
C617	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C618	C ELECTRO	CEXF1C470V	16V RSS 47MF (5X11) TP	
C620	C CERA	CXCH1H509D	50V CH 5PF D (TAPPING)	
C621	C CERA	CXCH1H509D	50V CH 5PF D (TAPPING)	
C622	C CERA	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	
C625	C ELECTRO	CEXF1H479V	50V RSS 4.7MF (5X11) TP	
C626	C ELECTRO	CEXF1H479V	50V RSS 4.7MF (5X11) TP	
C629	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C630	C ELECTRO	CEXF1E470V	25V RSS 47MF (5X11) TP	
C631	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C635	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C636	C ELECTRO	CEXF1H220V	50V RSS 22MF (5X11) TP	
C650	C CERA	CZSL1H470J	50V SL 47PF J (AXIAL)	
C660	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C661	C MYLAR	CMXM2A224J	100V 0.22MF J	
C662	C MYLAR	CMXM2A224J	100V 0.22MF J	
C665	C CERA	CCXB1H472K	50V B 4700PF K (TAPPING)	
C666	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C667	C CERA	CCXB1H472K	50V B 4700PF K (TAPPING)	
C668	C MYLAR	CMXM2A224J	100V 0.22MF J	
C669	C MYLAR	CMXM2A224J	100V 0.22MF J	
C690	C ELECTRO	CEXF1H479V	50V RSS 4.7MF (5X11) TP	
C691	C ELECTRO	CEXF1H479V	50V RSS 4.7MF (5X11) TP	
C698	C CERA	CZSL1H470J	50V SL 47PF J (AXIAL)	
C699	C CERA	CZSL1H470J	50V SL 47PF J (AXIAL)	
C770	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C771	C CERA SEMI	CBZF1H104Z	50V F 0.1MF Z	
C801	C LINE ACROSS	CL1UC3474M	0.47MF 1J(UCVSNDF/SV)+Q/O	(!)
C803	C CERA	CCXB3A472K	1KV B 4700PF K (TAPPING)	
C804	C CERA	CCXB3A472K	1KV B 4700PF K (TAPPING)	
C805	C ELECTRO	CEYN2W151P	450V LHS 150MF (25X40)	
C806	C ELECTRO	CEXF1H330V	50V RSS 33MF (6.3X11) TP	
C807	C CERA	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	
C808	C ELECTRO	CEXF1H479V	50V RSS 4.7MF (5X11) TP	
C809	C CERA	CCZB1H102K	50V B 1000PF K (AXIAL)	
C810	C CERA SEMI	CBXB3D102K	2KV BL(N) 1000PF K (T)	
C812	C CERA AC	CH1AFE472M	4KV 4700PF M KX DE1610	(!)
C813	C ELECTRO	CEYF2D101V	200V RSS 100MF (16X31.5)	
C814	C ELECTRO	CEXF2E470V	250V RSS 47MF (16X25) TP	
C820	C CERA	CCYR3A471K	1KV R 470PF K 125 DE0705	
C821	C CERA	CCXB1H102K	50V B 1000PF K (TAPPING)	
C823	C ELECTRO	CEXF1E102V	25V RSS 1000MF (13X20) TP	
C824	C CERA	CCXB3A471K	1KV B 470PF K (T)	
C830	C CERA SEMI	CBZF1H104Z	50V F 0.1MF Z	
C831	C CERA	CCXB3A471K	1KV B 470PF K (T)	
C832	C ELECTRO	CEXF1E102V	25V RSS 1000MF (13X20) TP	

Service Manual CP-785A

LOC	PART NAME	PART Code	PART Description	Remark
C835	C ELECTRO	CEXF1H470V	50V RSS 47MF (6.3X11) TP	
C840	C ELECTRO	CEXF1C222V	16V RSS 2200MF (16X31.5) TP	
C841	C ELECTRO	CEXF1C222V	16V RSS 2200MF (16X31.5) TP	
C844	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C850	C CERA	CCXB1H152K	50V B 1500PF K (TAPPING)	
C861	C ELECTRO	CEXF1E102V	25V RSS 1000MF (13X20) TP	
C863	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C866	C CERA	CCXB3A471K	1KV B 470PF K (T)	
C888	C ELECTRO	CEXF1C470V	16V RSS 47MF (5X11) TP	
C905	C ELECTRO	CEXF2E479V	250V RSS 4.7MF (10X16)TP	
C906	C ELECTRO	CEXF2E100V	250V RSS 10MF (10X20) TP	
C965	C CERA SEMI	CBXB3D102K	2KV BL(N) 1000PF K (T)	
C968	C MYLAR	CMXL2E104K	250V MEU 0.1MF K	
CA13	C CERA	CCXB1H271K	50V B 270PF K (TAPPING)	
CA14	C CERA	CCXB1H271K	50V B 270PF K (TAPPING)	
D100	LED	DSD50RH51B	SD50-RH51BGRW	
D100M	HOLDER LED	4853533600	P.P BK	
D101	DIODE	D1N4148---	1N4148 (TAPPING)	
D102	DIODE	D1SS85TA--	1SS85TA	
D313	DIODE	DRGP15J---	RGP15J	
D360	DIODE ZENER	DMTZJ22D--	MTZJ 22D	
D361	DIODE ZENER	DUZ33B----	UZ-33B	
D367	DIODE ZENER	DUZ33B----	UZ-33B	
D381	DIODE ZENER	DUZ33B----	UZ-33B	
D403	DIODE	DDG3-----	DG3	
D404	DIODE	DRGP30J---	RGP30J	
D405	DIODE	DRGP15J---	RGP15J	
D407	DIODE	DRGP15J---	RGP15J	
D408	DIODE	DRGP15J---	RGP15J	
D410	DIODE	D1N4004S--	1N4004S	
D411	DIODE	D1N4004S--	1N4004S	
D414	DIODE	D1N4004S--	1N4004S	
D450	DIODE	DRGP15J---	RGP15J	
D520	DIODE	D1N4148---	1N4148 (TAPPING)	
D521	DIODE	D1N4148---	1N4148 (TAPPING)	
D601	DIODE	D1N4148---	1N4148 (TAPPING)	
D602	DIODE	D1N4148---	1N4148 (TAPPING)	
D710	DIODE ZENER	DMTZJ5R1A-	MTZJ 5.1A	
D801	DIODE	DLT2A05G--	LT2A05G (TP)	
D802	DIODE	DLT2A05G--	LT2A05G (TP)	
D803	DIODE	DLT2A05G--	LT2A05G (TP)	
D804	DIODE	DLT2A05G--	LT2A05G (TP)	
D805	DIODE	DRGP15J---	RGP15J	
D806	DIODE	DRGP15J---	RGP15J	
D808	DIODE	DRGP15J---	RGP15J	
D809	DIODE	DRGP15J---	RGP15J	

LOC	PART NAME	PART Code	PART Description	Remark
D810	DIODE	DRGP15J---	RGP15J	
D811	DIODE ZENER	DMTZJ5R6B-	MTZJ 5.6B	
D820	DIODE	DRGP30J---	RGP30J	
D821	DIODE	DRGP15J---	RGP15J	
D822	DIODE ZENER	DMTZJ9R1C-	MTZJ 9.1C	
D824	DIODE	D1N4148---	1N4148 (TAPPING)	
D825	DIODE	D1N4148---	1N4148 (TAPPING)	
D830	DIODE	DRGP15J---	RGP15J	
D831	DIODE	DRGP15J---	RGP15J	
D840	DIODE	D1N4148---	1N4148 (TAPPING)	
D841	DIODE	D1N4148---	1N4148 (TAPPING)	
D860	DIODE	DRGP30J---	RGP30J	
D904	DIODE	D1N4004S--	1N4004S	
D905	DIODE	D1N4004S--	1N4004S	
D906	DIODE	D1N4004S--	1N4004S	
D907	DIODE	D1N4937G--	1N4937G (TAPPING)	
DA02	DIODE ZENER	DMTZJ5R6B-	MTZJ 5.6B	
DA04	DIODE ZENER	DMTZJ5R6B-	MTZJ 5.6B	
DA11	DIODE ZENER	DMTZJ5R6B-	MTZJ 5.6B	
DA15	DIODE ZENER	DMTZJ5R6B-	MTZJ 5.6B	
DA16	DIODE ZENER	DMTZJ5R6B-	MTZJ 5.6B	
DA20	DIODE ZENER	DMTZJ5R6B-	MTZJ 5.6B	
F801	FUSE GLASS TUBE	5FSGB4022L	SEMKO TL 4A 250V MF51	(!)
F801A	CLIP FUSE	4857415001	PFC5000-0702	
F801B	CLIP FUSE	4857415001	PFC5000-0702	
G900	SPARK GAP	4SG0DX0001	SSG-102-A1(1.0KV) TAP	
G901	SPARK GAP	4SG0DX0001	SSG-102-A1(1.0KV) TAP	
G902	SPARK GAP	4SG0DX0001	SSG-102-A1(1.0KV) TAP	
G903	SPARK GAP	4SG0DX0001	SSG-102-A1(1.0KV) TAP	
HP01	JACK EARPHONE	4859102130	YSC-1537	
I301	HEAT SINK ASS'Y	PTC2SW8217	1TDA8358J- + 7174301011	
I501	IC MICOM	1DW3653CH1	DW9365/N2/3-CH1	
I601	IC AUDIO	1MSP3415D-	MSP3415D	
I602	HEAT SINK ASS'Y	PTA2SW8215	1TDA8946J- + 7174301011	
I702	IC	1AT24C08PC	AT24C08-10PC	
I703	IC PREAMP	1TS0P1238W	TS0P1238WI1	
I801	HEAT SINK ASS'Y	PTA2SW7910	1STRF6654- + 7174301211	
I804	IC PHOTO COUPLER	1KP1010C--	KP-1010C	
I805	IC	1UPC574J--	UPC574J	
I806	IC	1SE130N---	SE130N	DP142,SE140N ==> R823 Must be 330 ohm "
I810	THYRISTOR	TX0202DA--	X0202DA1BA2	
I820	IC REGULATOR	1KA7805---	KA7805	
I822	IC REGULATOR	1KA7808---	KA7808	
I823	IC REGULATOR	1LP295033-	LP2950 3.3V	
I901	IC VIDEO AMP	1TDA6107Q-	TDA6107Q	

Service Manual CP-785A

LOC	PART NAME	PART Code	PART Description	Remark
JPA1	JACK PIN BOARD	4859110050	PH-JB-9614D	
JPA2	SOCKET RGB	4859200401	YRS21-R1	
JPA3	JACK PIN BOARD	4859108450	YSC03P-4120-14A	
L101	COIL PEAKING	5CPZ100K02	10UH K (AXIAL 3.5MM)	
L350	COIL PEAKING	5CPZ109M04	1UH 10.5MM M (LAL04TB)	
L381	COIL PEAKING	5CPZ109M04	1UH 10.5MM M (LAL04TB)	
L401	COIL H-LINEARITY	58H0000065	TRL-140D	29 inch
	COIL H-LINEARITY	58H0000025	TRL-330	25 inch
L402	COIL CHOKE	58C7070085	TLN-3062A	
L500	COIL PEAKING	5CPZ120K02	12UH K (AXIAL 3.5MM)	
L501	COIL PEAKING	5CPZ100K02	10UH K (AXIAL 3.5MM)	
L502	COIL PEAKING	5CPZ100K02	10UH K (AXIAL 3.5MM)	
L510	COIL PEAKING	5CPZ100K02	10UH K (AXIAL 3.5MM)	
L511	COIL PEAKING	5CPZ100K02	10UH K (AXIAL 3.5MM)	
L512	COIL PEAKING	5CPZ100K02	10UH K (AXIAL 3.5MM)	
L601	COIL PEAKING	5CPZ479K02	4.7UH K (AXIAL 3.5MM)	
L602	COIL PEAKING	5CPZ479K02	4.7UH K (AXIAL 3.5MM)	
L603	COIL PEAKING	5CPZ479K02	4.7UH K (AXIAL 3.5MM)	
L650	COIL BEAD	5MC0000100	HC-3550	
L801	COIL BEAD	5MC0000100	HC-3550	
L802	COIL CHOKE	58CX430599	AZ-9004Y 940K TP	
L803	COIL BEAD	5MC0000100	HC-3550	
LF801	FILTER LINE	5PLF24A1--	LF-24A1	
N001	TERM PIN	4857417500	DA-IB0214(D2.3/DY PIN)	
N002	TERM PIN	4857417500	DA-IB0214(D2.3/DY PIN)	
N003	TERM PIN	4857417500	DA-IB0214(D2.3/DY PIN)	
N004	TERM PIN	4857417500	DA-IB0214(D2.3/DY PIN)	
P401	CONNECTOR	4850705N19	YBNH250+YBNT250+ULW=400	
P402	CONN WAFER	4859240120	YFW500-06	
P501	CONNECTOR	4850705N14	YBNH250-05+YBNH250+ULW500	
P601	CONN WAFER	485923172S	YW025-04 (STICK)	
P904	CONN WAFER	4859238620	YPW500-02	
PWC1	CORD POWER AS	4859903010	KKP560+BL102NG+TUBE=2600	
Q101	TR	TKTC3198Y-	KTC3198Y	
Q103	TR	TKTC3202Y-	KTC3202Y (TP)	
Q401	TR	TST2009DH1	ST2009DH1	COMPATIBLE
		T2SD2553--	2SD-2553	
Q402	TR	T2SD1207T-	2SD1207-T (TAPPING)	COMPATIBLE
		TKTC3229--	KTC3229	
Q501	TR	TKTA1266Y-	KTA1266Y (TP)	
Q502	TR	TKTC3198Y-	KTC3198Y	
Q503	TR	TKTC3198Y-	KTC3198Y	
Q504	TR	TKTC3198Y-	KTC3198Y	
Q505	TR	TKTC3198Y-	KTC3198Y	
Q508	TR	TKTC3198Y-	KTC3198Y	
Q601	TR	TKTA1266Y-	KTA1266Y (TP)	

LOC	PART NAME	PART Code	PART Description	Remark
Q807	TR	TKTC3198Y-	KTC3198Y	
Q808	TR	TKTC3198Y-	KTC3198Y	
Q809	TR	TKTC3198Y-	KTC3198Y	
Q810	TR	TKTC3198Y-	KTC3198Y	
Q811	TR	TKTC3198Y-	KTC3198Y	
R101	R CARBON FILM	RD-AZ473J-	1/6 47K OHM J	
R102	R CARBON FILM	RD-AZ472J-	1/6 4.7K OHM J	
R103	R CARBON FILM	RD-AZ123J-	1/6 12K OHM J	
R104	R CARBON FILM	RD-AZ104J-	1/6 100K OHM J	
R105	R CARBON FILM	RD-AZ392J-	1/6 3.9K OHM J	
R106	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R107	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R113	R CARBON FILM	RD-AZ562J-	1/6 5.6K OHM J	
R114	R CARBON FILM	RD-AZ562J-	1/6 5.6K OHM J	
R115	R CARBON FILM	RD-AZ682J-	1/6 6.8K OHM J	
R116	R CARBON FILM	RD-AZ222J-	1/6 2.2K OHM J	
R117	R CARBON FILM	RD-AZ222J-	1/6 2.2K OHM J	
R120	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R310	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R311	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R331	R M-OXIDE FILM	RS01Z331J-	1W 330 OHM J (TAPPING)	
R340	R CARBON FILM	RD-4Z473J-	1/4 47K OHM J	
R350	R METAL FILM	RN-4Z1501F	1/4 1.50K OHM F	29 inch
	R METAL FILM	RN-4Z1801F	1/4 1.80K OHM F	25 inch
R351	R METAL FILM	RN-4Z1501F	1/4 1.50K OHM F	29 inch
	R METAL FILM	RN-4Z1801F	1/4 1.80K OHM F	25 inch
R370	R CARBON FILM	RD-4Z159J-	1/4 1.5 OHM J	
R394	R CARBON FILM	RD-AZ272J-	1/6 2.7K OHM J	
R395	R CARBON FILM	RD-AZ824J-	1/6 820K OHM J	
R396	R CARBON FILM	RD-AZ272J-	1/6 2.7K OHM J	
R397	R CARBON FILM	RD-AZ823J-	1/6 82K OHM J	
R398	R FUSIBLE	RF01Z828JA	1W 0.82 OHM J A CURVE	
R399	R M-OXIDE FILM	RS02Z120JS	2W 12 OHM J SMALL	
R401	R CARBON FILM	RD-4Z272J-	1/4 2.7K OHM J	
R402	R CARBON FILM	RD-4Z220J-	1/4 22 OHM J	
R404	R CARBON FILM	RD-4Z399J-	1/4 3.9 OHM J	
R406	R M-OXIDE FILM	RS02Z561JS	2W 560 OHM J SMALL	
R415	R M-OXIDE FILM	RS02Z102JS	2W 1K OHM J SMALL	
R420	R CARBON FILM	RD-AZ223J-	1/6 22K OHM J	
R427	R M-OXIDE FILM	RS01Z101J-	1W 100 OHM J (TAPPING)	
R450	R M-OXIDE FILM	RS02Z223JS	2W 22K OHM J SMALL	
R501	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R502	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R503	R CARBON FILM	RD-AZ332J-	1/6 3.3K OHM J	
R504	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R505	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	

Service Manual CP-785A

LOC	PART NAME	PART Code	PART Description	Remark
R506	R CARBON FILM	RD-AZ332J-	1/6 3.3K OHM J	
R507	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R508	R CARBON FILM	RD-AZ332J-	1/6 3.3K OHM J	
R509	R CARBON FILM	RD-AZ681J-	1/6 680 OHM J	
R512	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R513	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R514	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R515	R CARBON FILM	RD-AZ153J-	1/6 15K OHM J	
R516	R CARBON FILM	RD-AZ393J-	1/6 39K OHM J	
R517	R CARBON FILM	RD-AZ181J-	1/6 180 OHM J	
R518	R CARBON FILM	RD-AZ273J-	1/6 27K OHM J	
R520	R CARBON FILM	RD-AZ333J-	1/6 33K OHM J	
R521	R CARBON FILM	RD-AZ391J-	1/6 390 OHM J	
R522	R CARBON FILM	RD-AZ221J-	1/6 220 OHM J	
R523	R CARBON FILM	RD-AZ331J-	1/6 330 OHM J	
R524	R CARBON FILM	RD-AZ561J-	1/6 560 OHM J	
R525	R CARBON FILM	RD-AZ104J-	1/6 100K OHM J	
R526	R CARBON FILM	RD-AZ479J-	1/6 4.7 OHM J	
R527	R CARBON FILM	RD-AZ431J-	1/6 430 OHM J	
R528	R CARBON FILM	RD-AZ221J-	1/6 220 OHM J	
R530	R CARBON FILM	RD-AZ470J-	1/6 47 OHM J	
R531	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R533	R CARBON FILM	RD-AZ103J-	1/6 10K OHM J	
R537	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R538	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R539	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R540	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R541	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R543	R CARBON FILM	RD-AZ472J-	1/6 4.7K OHM J	
R545	R CARBON FILM	RD-AZ682J-	1/6 6.8K OHM J	
R547	R CARBON FILM	RD-AZ103J-	1/6 10K OHM J	
R548	R CARBON FILM	RD-AZ472J-	1/6 4.7K OHM J	
R549	R CARBON FILM	RD-AZ472J-	1/6 4.7K OHM J	
R550	R CARBON FILM	RD-AZ472J-	1/6 4.7K OHM J	
R555	R CARBON FILM	RD-AZ103J-	1/6 10K OHM J	
R556	R CARBON FILM	RD-AZ472J-	1/6 4.7K OHM J	29 inch
	R CARBON FILM	RD-AZ512J-	1/6 5.1K OHM J	25 inch
R567	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R570	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R580	R CARBON FILM	RD-AZ561J-	1/6 560 OHM J	
R585	R CARBON FILM	RD-AZ224J-	1/6 220K OHM J	
R586	R CARBON FILM	RD-AZ221J-	1/6 220 OHM J	
R587	WIRE COPPER	85801065GY	AWG22 1/0.65 TIN COATING	
R588	WIRE COPPER	85801065GY	AWG22 1/0.65 TIN COATING	
R589	WIRE COPPER	85801065GY	AWG22 1/0.65 TIN COATING	
R595	WIRE COPPER	85801065GY	AWG22 1/0.65 TIN COATING	

LOC	PART NAME	PART Code	PART Description	Remark
R597	R METAL FILM	RN-4Z1502F	1/4 15K OHM F	
R598	R METAL FILM	RN-4Z1502F	1/4 15K OHM F	
R599	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R605	R CARBON FILM	RD-AZ751J-	1/6 750 OHM J	
R606	R CARBON FILM	RD-AZ751J-	1/6 750 OHM J	
R608	R CARBON FILM	RD-2Z151J-	1/2 150 OHM J	
R609	R CARBON FILM	RD-2Z151J-	1/2 150 OHM J	
R610	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R611	R CARBON FILM	RD-AZ104J-	1/6 100K OHM J	
R614	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R615	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R620	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R621	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R622	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R650	R CARBON FILM	RD-AZ822J-	1/6 8.2K OHM J	
R660	R CARBON FILM	RD-AZ822J-	1/6 8.2K OHM J	
R661	R CARBON FILM	RD-AZ752J-	1/6 7.5K OHM J	
R662	R CARBON FILM	RD-AZ752J-	1/6 7.5K OHM J	
R700	R CARBON FILM	RD-2Z332J-	1/2 3.3K OHM J	
R710	R CARBON FILM	RD-AZ431J-	1/6 430 OHM J	
R711	R CARBON FILM	RD-AZ431J-	1/6 430 OHM J	
R713	R CARBON FILM	RD-AZ331J-	1/6 330 OHM J	
R720	R CARBON FILM	RD-AZ122J-	1/6 1.2K OHM J	
R721	R CARBON FILM	RD-AZ181J-	1/6 180 OHM J	
R722	R CARBON FILM	RD-AZ221J-	1/6 220 OHM J	
R723	R CARBON FILM	RD-AZ331J-	1/6 330 OHM J	
R724	R CARBON FILM	RD-AZ471J-	1/6 470 OHM J	
R801	POSISTOR	DPC7R0M290	2322 662 96709	COMPATIBLE
		DDC7R0M290	ECPCD7R0M290	
R802	R M-OXIDE FILM	RS02Z753JS	2W 75K OHM J SMALL	
R803	R M-OXIDE FILM	RS02Z473JS	2W 47K OHM J SMALL	
R804	R FUSIBLE	RF02Z158K-	2W 0.15 OHM K (TAPPING)	
R805	R CARBON FILM	RD-2Z100J-	1/2 10 OHM J	
R806	R CARBON FILM	RD-4Z472J-	1/4 4.7K OHM J	
R807	R CARBON FILM	RD-2Z272J-	1/2 2.7K OHM J	
R808	R CARBON FILM	RD-4Z911J-	1/4 910 OHM J	29 inch
	R CARBON FILM	RD-4Z102J-	1/4 1K OHM J	25 inch
R810	R CARBON FILM	RD-4Z102J-	1/4 1K OHM J	
R811	R CARBON COMP	RC-2Z565KP	1/2 5.6M OHM K	
R817	R CARBON FILM	RD-AZ473J-	1/6 47K OHM J	
R819	R CEMENT	RX10B339JQ	10W 3.3 OHM J BEN 25MM 4P	
R820	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R821	R CARBON FILM	RD-4Z102J-	1/4 1K OHM J	
R823	R CARBON FILM	RD-4Z331J-	1/4 330 OHM J	When I806 is DP142 (or SE140)
	R CARBON FILM	RD-4Z512J-	1/4 5.1K OHM J	When I806 is SE130
R829	R CARBON FILM	RD-AZ223J-	1/6 22K OHM J	

Service Manual CP-785A

LOC	PART NAME	PART Code	PART Description	Remark
R830	R CARBON FILM	RD-AZ332J-	1/6 3.3K OHM J	
R840	R CARBON FILM	RD-4Z220J-	1/4 22 OHM J	
R841	R CARBON FILM	RD-2Z479J-	1/2 4.7 OHM J	
R850	R CARBON FILM	RD-2Z479J-	1/2 4.7 OHM J	
R855	R CARBON FILM	RD-4Z185J-	1/4 1.8M OHM J	
R870	R CARBON FILM	RD-2Z222J-	1/2 2.2K OHM J	
R888	R CARBON FILM	RD-AZ103J-	1/6 10K OHM J	
R910	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R911	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R912	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R913	R CARBON COMP	RC-2Z102K-	1/2 1K OHM K	
R914	R CARBON COMP	RC-2Z102K-	1/2 1K OHM K	
R915	R CARBON COMP	RC-2Z102K-	1/2 1K OHM K	
R920	R M-OXIDE FILM	RS01Z569J-	1W 5.6 OHM J (TAPPING)	29 inch
	R M-OXIDE FILM	RS01Z249J-	1W 2.4 OHM J (TAPPING)	25 inch
R921	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R922	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R923	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R924	R CARBON FILM	RD-4Z105J-	1/4 1M OHM J	
R925	R CARBON FILM	RD-4Z102J-	1/4 1K OHM J	
RA01	R CARBON FILM	RD-AZ680J-	1/6 68 OHM J	
RA11	R CARBON FILM	RD-AZ680J-	1/6 68 OHM J	
RA12	R CARBON FILM	RD-AZ680J-	1/6 68 OHM J	
RA16	R CARBON FILM	RD-AZ680J-	1/6 68 OHM J	
RA20	R CARBON FILM	RD-AZ473J-	1/6 47K OHM J	
RA21	R CARBON FILM	RD-AZ473J-	1/6 47K OHM J	
RA40	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
RA41	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
SCT1	SOCKET CRT	4859303530	PCS629-03C	COMPATIBLE (!)
		4859303830	ISM694S	
SF01	FILTER SAW	5PK3953M--	K3953M	
SF02	FILTER SAW	5PK9650M--	K9650M	
SW700	SW TACT	5S50101090	THVH472GCA	
SW701	SW TACT	5S50101090	THVH472GCA	
SW702	SW TACT	5S50101090	THVH472GCA	
SW703	SW TACT	5S50101090	THVH472GCA	
SW704	SW TACT	5S50101090	THVH472GCA	
SW801	SW POWER PUSH	5S40101143	PS3-22SP (P.C.B)	
T401	TRANS DRIVE	50D19A1---	TD-19A1	
T402	FBT (old)	50H0000181	1352.5008E	New FBT Needs Additional hole ==> Can not be inserted
	FBT (new)	50H0000247	FFA64028L	
T801	TRANS SMPS	50M4950A8-	TSM-4950A8	
U100	TUNER VARACTOR	4859721530	DT5-BF18D N	
X502	CRYSTAL QUARTZ	5XE12R000E	HC-49/U 12.00000MHZ 30PPM	
X601	CRYSTAL QUARTZ	5XE18R432E	HC-49/U 18.43200MHZ 30PPM	
Z501	FILTER CERA	5PYXT5R5MB	XT 5.5MB	

6-4-2. New Main PCB Assembly Parts List (for FS-xxV1 & New FS-xxT90 Models)

- The old Main Assembly of FS-xxT90 will be changed. (October 2002)

LOC	PART NAME	PART Code	PART Description	Remark
A001	PCB MAIN	4859806493	330X246 S1B	
C101	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C102	C ELECTRO	CEXF1H470V	50V RSS 47MF (6.3X11) TP	
C103	C CERA	CCXB1H102K	50V B 1000PF K (TAPPING)	
C104	C CERA	CCXB1H102K	50V B 1000PF K (TAPPING)	
C106	C ELECTRO	CEXF1H220V	50V RSS 22MF (5X11) TP	
C108	C CERA	CCXB1H101K	50V B 100PF K (TAPPING)	
C120	C CERA	CCXB1H102K	50V B 1000PF K (TAPPING)	
C121	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C305	C ELECTRO	CEXF1E471V	25V RSS 470MF (10X16) TP	
C313	C MYLAR	CMXM2A104J	100V 0.1MF J (TP)	
C315	C ELECTRO	CEXF2C470C	160V RUS 47MF (13X25) TP	
C320	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C350	C CERA	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	
C351	C CERA	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	
C370	C MYLAR	CMXM2A473J	100V 0.047MF J (TP)	
C401	C ELECTRO	CEXF1H100C	50V RUS 10MF (5X11) TP	
C402	C MYLAR	CMYH3C123J	1.6KV BUP 0.012MF J	29 inch
	C MYLAR	CMYH3C912J	1.6KV BUP 9100PF J	25 inch
C404	C MYLAR	CMYH3C722J	1.6KV BUP 7200PF J	29 inch
	C MYLAR	CMYH3C692J	1.6KV BUP 6900PF J	25 inch
C408	C MYLAR	CMYE2G624J	400V PU 0.62MF J	29 inch
	C MYLAR	CMYE2G434J	400V PU 0.43MF J	25 inch
C412	C ELECTRO	CEXF2C339C	160V RUS 3.3MF (8X11.5) TP	
C414	C MYLAR	CMXM2A104J	100V 0.1MF J (TP)	
C415	C ELECTRO	CEXF2E479V	250V RSS 4.7MF (10X16)TP	
C418	C CERA	CCXB1H102K	50V B 1000PF K (TAPPING)	
C420	C CERA	CCXB2H222K	500V B 2200PF K (TAPPING)	
C430	C MYLAR	CMYH3C122J	1.6KV BUP 1200PF J	
C431	C MYLAR	CMXE2D103J	200V PU 0.01MF J (TP)	
C440	C MYLAR	CMXE2G273J	400V PU 0.027MF J (TP)	
C499	C ELECTRO	CEYD1H689W	50V RHD 6.8MF (16X35.5)	
C509	C ELECTRO	CEXF1E470V	25V RSS 47MF (5X11) TP	
C511	C MYLAR	CMXM2A224J	100V 0.22MF J	
C512	C MYLAR	CMXM2A224J	100V 0.22MF J	
C513	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C514	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C515	C CERA	CBZR1C222M	16V Y5R 2200PF M (AXIAL)	
C516	C CERA	CBZR1C472M	16V Y5R 4700PF M (AXIAL)	
C517	C ELECTRO	CEXF1H109V	50V RSS 1MF (5X11) TP	
C518	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C519	C ELECTRO	CEXF1H109V	50V RSS 1MF (5X11) TP	
C520	C CERA	CCZB1H102K	50V B 1000PF K (AXIAL)	

Service Manual CP-785A

LOC	PART NAME	PART Code	PART Description	Remark
C521	C CERA	CCZB1H102K	50V B 1000PF K (AXIAL)	
C523	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C524	C MYLAR	CMXL1J104J	63V MEU 0.1MF J	
C525	C CERA	CCXB1H102K	50V B 1000PF K (TAPPING)	
C526	C MYLAR	CMXL1J104J	63V MEU 0.1MF J	
C527	C MYLAR	CMXM2A473J	100V 0.047MF J (TP)	
C528	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C529	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C530	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C531	C CERA	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	
C532	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C533	C CERA	CCXB1H102K	50V B 1000PF K (TAPPING)	
C534	C CERA	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	
C535	C CERA	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	
C536	C CERA	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	
C537	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C540	C ELECTRO	CEXF1H220V	50V RSS 22MF (5X11) TP	
C541	C ELECTRO	CEXF1H220V	50V RSS 22MF (5X11) TP	
C542	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C543	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C550	C ELECTRO	CEXF1H229V	50V RSS 2.2MF (5X11) TP	
C555	C ELECTRO	CEXF1C470V	16V RSS 47MF (5X11) TP	
C560	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C561	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C564	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C565	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C577	C CERA	CCXB1H561K	50V B 560PF K (TAPPING)	
C585	C CERA	CCXB1H222K	50V B 2200PF K (TAPPING)	
C590	C CERA	CXCH1H270J	50V CH 27PF J (TAPPING)	
C591	C CERA	CXCH1H270J	50V CH 27PF J (TAPPING)	
C592	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C593	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C599	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C601	C CERA	CCXB1H472K	50V B 4700PF K (TAPPING)	
C602	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C603	C CERA	CCXB1H472K	50V B 4700PF K (TAPPING)	
C604	C ELECTRO	CEXF1E102V	25V RSS 1000MF (13X20) TP	
C605	C ELECTRO	CEXF1E470V	25V RSS 47MF (5X11) TP	
C608	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C610	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C611	C ELECTRO	CEXF1H339V	50V RSS 3.3MF (5X11) TP	
C612	C ELECTRO	CEXF1H109V	50V RSS 1MF (5X11) TP	
C613	C ELECTRO	CEXF1H109V	50V RSS 1MF (5X11) TP	
C614	C ELECTRO	CEXF1H109V	50V RSS 1MF (5X11) TP	
C615	C ELECTRO	CEXF1H109V	50V RSS 1MF (5X11) TP	
C616	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	

LOC	PART NAME	PART Code	PART Description	Remark
C617	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C618	C ELECTRO	CEXF1C470V	16V RSS 47MF (5X11) TP	
C620	C CERA	CXCH1H509D	50V CH 5PF D (TAPPING)	
C621	C CERA	CXCH1H509D	50V CH 5PF D (TAPPING)	
C622	C CERA	CCXF1H223Z	50V F 0.022MF Z (TAPPING)	
C625	C ELECTRO	CEXF1H479V	50V RSS 4.7MF (5X11) TP	
C626	C ELECTRO	CEXF1H479V	50V RSS 4.7MF (5X11) TP	
C629	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C630	C ELECTRO	CEXF1E470V	25V RSS 47MF (5X11) TP	
C631	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C635	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C636	C ELECTRO	CEXF1H220V	50V RSS 22MF (5X11) TP	
C650	C CERA	CXCH1H470J	50V CH 47PF J (TAPPING)	
C660	C ELECTRO	CEXF1H100V	50V RSS 10MF (5X11) TP	
C661	C MYLAR	CMXM2A224J	100V 0.22MF J	
C662	C MYLAR	CMXM2A224J	100V 0.22MF J	
C663	C MYLAR	CMXM2A103J	100V 0.01MF J (TP)	
C664	C MYLAR	CMXM2A103J	100V 0.01MF J (TP)	
C665	C CERA	CCXB1H472K	50V B 4700PF K (TAPPING)	
C666	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C667	C CERA	CCXB1H472K	50V B 4700PF K (TAPPING)	
C668	C MYLAR	CMXM2A224J	100V 0.22MF J	
C669	C MYLAR	CMXM2A224J	100V 0.22MF J	
C690	C ELECTRO	CEXF1H479V	50V RSS 4.7MF (5X11) TP	
C691	C ELECTRO	CEXF1H479V	50V RSS 4.7MF (5X11) TP	
C698	C CERA	CXCH1H470J	50V CH 47PF J (TAPPING)	
C699	C CERA	CXCH1H470J	50V CH 47PF J (TAPPING)	
C770	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C771	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C801	C LINE ACROSS	CL1UC3474M	0.47MF 1J(UCVSNDF/SV)+Q/O	(!)
C803	C CERA	CCXB3A472K	1KV B 4700PF K (TAPPING)	
C804	C CERA	CCXB3A472K	1KV B 4700PF K (TAPPING)	
C805	C ELECTRO	CEYN2G181P	400V LHS 180MF (25X35)	
C806	C ELECTRO	CEXF1H330V	50V RSS 33MF (6.3X11) TP	
C807	C CERA	CCXF1H473Z	50V F 0.047MF Z (TAPPING)	
C808	C ELECTRO	CEXF1H479V	50V RSS 4.7MF (5X11) TP	
C809	C CERA	CCXB1H102K	50V B 1000PF K (TAPPING)	
C810	C CERA SEMI	CBXB3D102K	2KV BL(N) 1000PF K (T)	
C812	C CERA AC	CH1BFE472M	AC400V 4700PF M U/C/V	(!)
C813	C ELECTRO	CEXF2C101V	160V RSS 100MF (16X25) TP	
C814	C ELECTRO	CEXF2C101V	160V RSS 100MF (16X25) TP	
C820	C CERA	CCXB3A221K	1KV B 220PF K (TAPPING)	
C821	C CERA	CCXB1H102K	50V B 1000PF K (TAPPING)	
C823	C ELECTRO	CEXF1E102V	25V RSS 1000MF (13X20) TP	
C830	C CERA SEMI	CBXF1H104Z	50V F 0.1MF Z (TAPPING)	
C832	C ELECTRO	CEXF1E102V	25V RSS 1000MF (13X20) TP	

Service Manual CP-785A

LOC	PART NAME	PART Code	PART Description	Remark
C835	C ELECTRO	CEXF1C470V	16V RSS 47MF (5X11) TP	
C840	C ELECTRO	CEXF1C222V	16V RSS 2200MF (16X31.5) TP	
C841	C ELECTRO	CEXF1C222V	16V RSS 2200MF (16X31.5) TP	
C844	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C850	C CERA	CCXB1H152K	50V B 1500PF K (TAPPING)	
C861	C ELECTRO	CEXF1E102V	25V RSS 1000MF (13X20) TP	
C863	C ELECTRO	CEXF1E101V	25V RSS 100MF (6.3X11) TP	
C906	C ELECTRO	CEXF2E100V	250V RSS 10MF (10X20) TP	
C965	C CERA SEMI	CBXB3D102K	2KV BL(N) 1000PF K (T)	
C968	C MYLAR	CMXL2E104K	250V MEU 0.1MF K	
CA13	C CERA	CCXB1H271K	50V B 270PF K (TAPPING)	
CA14	C CERA	CCXB1H271K	50V B 270PF K (TAPPING)	
D100	LED	DSD50RH51B	SD50-RH51BGRW	FS-xxT90
D100M	HOLDER LED	4853533600	P.P BK	FS-xxT90
D101	DIODE	D1N4148---	1N4148 (TAPPING)	
D313	DIODE	D1N4937G--	1N4937G (TAPPING)	
D360	DIODE ZENER	DUZ33B----	UZ-33B	
D361	DIODE ZENER	DUZ33B----	UZ-33B	
D367	DIODE ZENER	DUZ33B----	UZ-33B	
D381	DIODE ZENER	DUZ33B----	UZ-33B	
D403	DIODE	DDGP30L---	DGP30L	
D404	DIODE	DRGP15J---	RGP15J	
D405	DIODE	D1N4937G--	1N4937G (TAPPING)	
D406	DIODE	DRGP15J---	RGP15J	
D407	DIODE	D1N4937G--	1N4937G (TAPPING)	
D408	DIODE	D1N4937G--	1N4937G (TAPPING)	
D410	DIODE	D1N4004S--	1N4004S	
D411	DIODE	D1N4004S--	1N4004S	
D450	DIODE	D1N4937G--	1N4937G (TAPPING)	
D520	DIODE	D1N4148---	1N4148 (TAPPING)	
D521	DIODE	D1N4148---	1N4148 (TAPPING)	
D601	DIODE	D1N4148---	1N4148 (TAPPING)	
D602	DIODE	D1N4148---	1N4148 (TAPPING)	
D710	DIODE ZENER	DMTZJ5R1A-	MTZJ 5.1A	
D801	DIODE	DLT2A05G--	LT2A05G (TP)	(!)
D802	DIODE	DLT2A05G--	LT2A05G (TP)	(!)
D803	DIODE	DLT2A05G--	LT2A05G (TP)	(!)
D804	DIODE	DLT2A05G--	LT2A05G (TP)	(!)
D805	DIODE	D1N4937G--	1N4937G (TAPPING)	
D806	DIODE	D1N4937G--	1N4937G (TAPPING)	
D808	DIODE	D1N4937G--	1N4937G (TAPPING)	
D809	DIODE	D1N4937G--	1N4937G (TAPPING)	
D810	WIRE COPPER	85801065GY	AWG22 1/0.65 TIN COATING	
D811	DIODE ZENER	DMTZJ5R6B-	MTZJ 5.6B	
D818	DIODE	DRGP15J---	RGP15J	
D819	DIODE	DRGP15J---	RGP15J	

LOC	PART NAME	PART Code	PART Description	Remark
D820	DIODE	DRGP15J---	RGP15J	
D821	DIODE	D1N4937G--	1N4937G (TAPPING)	
D824	DIODE	D1N4148---	1N4148 (TAPPING)	
D825	DIODE	D1N4148---	1N4148 (TAPPING)	
D830	DIODE	D1N4937G--	1N4937G (TAPPING)	
D831	DIODE	D1N4937G--	1N4937G (TAPPING)	
D840	DIODE	D1N4148---	1N4148 (TAPPING)	
D841	DIODE	D1N4148---	1N4148 (TAPPING)	
D860	DIODE	DRGP15J---	RGP15J	
D861	DIODE	DRGP15J---	RGP15J	
D862	DIODE	DRGP15J---	RGP15J	
D890	DIODE ZENER	DUZ33B----	UZ-33B	
D891	DIODE	D1N4148---	1N4148 (TAPPING)	
D892	DIODE ZENER	DUZ8R2BL--	UZ-8.2BL	
D907	DIODE	DLT2A05G--	LT2A05G (TP)	
DA02	DIODE ZENER	DMTZJ5R6B-	MTZJ 5.6B	
DA04	DIODE ZENER	DMTZJ5R6B-	MTZJ 5.6B	
DA11	DIODE ZENER	DMTZJ5R6B-	MTZJ 5.6B	
DA15	DIODE ZENER	DMTZJ5R6B-	MTZJ 5.6B	
DA16	DIODE ZENER	DMTZJ5R6B-	MTZJ 5.6B	
DA20	DIODE ZENER	DMTZJ5R6B-	MTZJ 5.6B	
F801	FUSE GLASS TUBE	5FSGB4022L	SEMKO TL 4A 250V MF51	(!)
F801A	CLIP FUSE	4857415001	PFC5000-0702	
F801B	CLIP FUSE	4857415001	PFC5000-0702	
G900	SPARK GAP	4SG0DX0001	SSG-102-A1(1.0KV) TAP	
G901	SPARK GAP	4SG0DX0001	SSG-102-A1(1.0KV) TAP	
G902	SPARK GAP	4SG0DX0001	SSG-102-A1(1.0KV) TAP	
G903	SPARK GAP	4SG0DX0001	SSG-102-A1(1.0KV) TAP	
HP01	JACK EARPHONE	4859102130	YSC-1537	FS-xxT90
I301	HEAT SINK ASS'Y	PTC2SW8217	1TDA8358J- + 7174301011	
I501	IC MICOM	1DW3653CH1	DW9365/N2/3-CH1	FS-xxT90 (With TXT)
	IC MICOM	1DW3852CH2	DW9385/N2/2-CH1	FS-xxV81 (Without TXT)
I601	IC AUDIO	1MSP3415D-	MSP3415D	FS-xxT90 (Stereo)
	IC AUDIO	1MSP3465V3	MSP3465G-PP-B8-V3	FS-xxV81 (Mono)
I602	IC AMP	1TDA8946J-	TDA8946J	
I702	IC	1AT24C08PC	AT24C08-10PC	
I703	IC PREAMP	1TS0P1238W	TS0P1238W11	FS-xxT90
I801	IC SMPS	1STRF6653-	STR-F6653	COMPATIBLE
		1STRF6654-	STR-F6654	
I804	IC PHOTO COUPLER	1KP1010C--	KP-1010C	(!)
I806	IC ERROR AMP	1DP142----	DP142	DP142,SE140N
	IC ERROR AMP	1SE140N---	SE140N	==> R823 Must be 330 ohm
	IC ERROR AMP	1DP132----	DP132	SE130N
	IC ERROR AMP	1SE130N---	SE130N	==> R823 Must be 5.1K ohm
I810	THYRISTOR	TX0202DA--	X0202DA1BA2	
I820	IC REGULATOR	1KA7805---	KA7805	

Service Manual CP-785A

LOC	PART NAME	PART Code	PART Description	Remark
I823	IC REGULATOR	1LP295033-	LP2950 3.3V	
I901	IC VIDEO AMP	1TDA6107Q-	TDA6107Q	
JA01	WIRE COPPER	85801065GY	AWG22 1/0.65 TIN COATING	FS-xxV81
JA02	WIRE COPPER	85801065GY	AWG22 1/0.65 TIN COATING	FS-xxT90
JA04	WIRE COPPER	85801065GY	AWG22 1/0.65 TIN COATING	FS-xxT90
JJA03	WIRE COPPER	85801065GY	AWG22 1/0.65 TIN COATING	FS-xxV81
JPA1	JACK PIN BOARD	4859110050	PH-JB-9614D	FS-xxT90
	JACK PIN BOARD	4859109250	PH-JB-9614A	FS-xxV81
JPA2	SOCKET RGB	4859200401	YRS21-R1	FS-xxT90
	SOCKET RGB	4859110950	YS01-0001	FS-xxV81
JPA3	JACK PIN BOARD	4859108450	YSC03P-4120-14A	FS-xxT90
L101	COIL PEAKING	5CPZ100K02	10UH K (AXIAL 3.5MM)	
L350	COIL PEAKING	5CPZ109M04	1UH 10.5MM M (LAL04TB)	
L381	COIL PEAKING	5CPZ109M04	1UH 10.5MM M (LAL04TB)	
L401	COIL H-LINEARITY	58H0000065	TRL-140D	29 inch
	COIL H-LINEARITY	58H0000025	TRL-330	25 inch
L402	COIL CHOKE	58C7070085	TLN-3062A	
L500	COIL PEAKING	5CPZ120K02	12UH K (AXIAL 3.5MM)	
L501	COIL PEAKING	5CPZ100K02	10UH K (AXIAL 3.5MM)	
L502	COIL PEAKING	5CPZ100K02	10UH K (AXIAL 3.5MM)	
L510	COIL PEAKING	5CPZ100K02	10UH K (AXIAL 3.5MM)	
L511	COIL PEAKING	5CPZ100K02	10UH K (AXIAL 3.5MM)	
L512	COIL PEAKING	5CPZ100K02	10UH K (AXIAL 3.5MM)	
L601	COIL PEAKING	5CPZ479K02	4.7UH K (AXIAL 3.5MM)	
L602	COIL PEAKING	5CPZ479K02	4.7UH K (AXIAL 3.5MM)	
L603	COIL PEAKING	5CPZ479K02	4.7UH K (AXIAL 3.5MM)	
L650	WIRE COPPER	85801065GY	AWG22 1/0.65 TIN COATING	
L801	COIL BEAD	5MC0000100	HC-3550	
L802	COIL CHOKE	58CX430599	AZ-9004Y 940K TP	
L803	WIRE COPPER	85801065GY	AWG22 1/0.65 TIN COATING	
LF801	FILTER LINE	5PLF24A1--	LF-24A1	(!)
N001	TERM PIN	4857417500	DA-IB0214(D2.3/DY PIN)	
N002	TERM PIN	4857417500	DA-IB0214(D2.3/DY PIN)	
N003	TERM PIN	4857417500	DA-IB0214(D2.3/DY PIN)	
N004	TERM PIN	4857417500	DA-IB0214(D2.3/DY PIN)	
N005	TERM PIN	4857417500	DA-IB0214(D2.3/DY PIN)	FS-xxV81
N006	TERM PIN	4857417500	DA-IB0214(D2.3/DY PIN)	FS-xxV81
N401	TERM PIN	4857417500	DA-IB0214(D2.3/DY PIN)	
N402	TERM PIN	4857417500	DA-IB0214(D2.3/DY PIN)	
N403	TERM PIN	4857417500	DA-IB0214(D2.3/DY PIN)	
N404	TERM PIN	4857417500	DA-IB0214(D2.3/DY PIN)	
P401	CONNECTOR	4850705N19	YBNH250+YBNT250+ULW=400	
P501	CONNECTOR	4850705N14	YBNH250-05+YBNH250+ULW500	
P601	CONN WAFER	485923172S	YW025-04 (STICK)	
P602	CONN WAFER	485923522S	YW025-09 (STICK)	FS-xxV81
P701	CONN WAFER	485923192S	YW025-06 (STICK)	FS-xxV81

LOC	PART NAME	PART Code	PART Description	Remark
PWC1	CORD POWER AS	4859903010	KKP560+BL102NG+TUBE=2600	(!)
Q101	TR	TKTC3198Y-	KTC3198Y	
Q401	TR	TST2009DH1 T2SD2553--	ST2009DH1 2SD-2553	COMPATIBLE
Q402	TR	TKTC3229--	KTC3229	
Q501	TR	TKTA1266Y-	KTA1266Y (TP)	
Q502	TR	TKTC3198Y-	KTC3198Y	
Q503	TR	TKTC3198Y-	KTC3198Y	
Q504	TR	TKTC3198Y-	KTC3198Y	
Q505	TR	TKTC3198Y-	KTC3198Y	
Q508	TR	TKTC3198Y-	KTC3198Y	
Q601	TR	TKTA1266Y-	KTA1266Y (TP)	
Q807	TR	TKTC3198Y-	KTC3198Y	
Q808	TR	TKTC3198Y-	KTC3198Y	
Q809	TR	TKTC3198Y-	KTC3198Y	
Q810	TR	TKTC3198Y-	KTC3198Y	
Q811	TR	TKTC3198Y-	KTC3198Y	
Q822	TR	TKTC3205Y-	KTC3205Y (TP)	
R101	R CARBON FILM	RD-AZ473J-	1/6 47K OHM J	
R102	R CARBON FILM	RD-AZ472J-	1/6 4.7K OHM J	
R103	R CARBON FILM	RD-AZ123J-	1/6 12K OHM J	
R104	R CARBON FILM	RD-AZ104J-	1/6 100K OHM J	
R105	R CARBON FILM	RD-AZ392J-	1/6 3.9K OHM J	
R106	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R107	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R115	R CARBON FILM	RD-AZ682J-	1/6 6.8K OHM J	
R116	R CARBON FILM	RD-AZ222J-	1/6 2.2K OHM J	
R120	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R310	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R311	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R331	R M-OXIDE FILM	RS01Z331J-	1W 330 OHM J (TAPPING)	
R340	R CARBON FILM	RD-4Z473J-	1/4 47K OHM J	
R350	R METAL FILM	RN-4Z1501F	1/4 1.50K OHM F	29 inch
	R METAL FILM	RN-4Z1801F	1/4 1.80K OHM F	25 inch
R351	R METAL FILM	RN-4Z1501F	1/4 1.50K OHM F	29 inch
	R METAL FILM	RN-4Z1801F	1/4 1.80K OHM F	25 inch
R370	R CARBON FILM	RD-4Z159J-	1/4 1.5 OHM J	
R393	R CARBON FILM	RD-2Z279J-	1/2 2.7 OHM J	
R394	R CARBON FILM	RD-AZ272J-	1/6 2.7K OHM J	
R395	R CARBON FILM	RD-AZ824J-	1/6 820K OHM J	
R396	R CARBON FILM	RD-AZ272J-	1/6 2.7K OHM J	
R397	R CARBON FILM	RD-AZ823J-	1/6 82K OHM J	
R398	R CARBON FILM	RD-2Z129J-	1/2 1.2 OHM J	
R399	R M-OXIDE FILM	RS02Z120JS	2W 12 OHM J SMALL	
R401	R CARBON FILM	RD-4Z272J-	1/4 2.7K OHM J	
R402	R CARBON FILM	RD-4Z220J-	1/4 22 OHM J	

Service Manual CP-785A

LOC	PART NAME	PART Code	PART Description	Remark
R404	R CARBON FILM	RD-4Z399J-	1/4 3.9 OHM J	
R406	R M-OXIDE FILM	RS02Z271JS	2W 270 OHM J SMALL	
R415	R M-OXIDE FILM	RS02Z102JS	2W 1K OHM J SMALL	
R420	R CARBON FILM	RD-AZ223J-	1/6 22K OHM J	
R427	R M-OXIDE FILM	RS01Z101J-	1W 100 OHM J (TAPPING)	
R450	R M-OXIDE FILM	RS02Z223JS	2W 22K OHM J SMALL	
R481	WIRE COPPER	85801065GY	AWG22 1/0.65 TIN COATING	
R482	WIRE COPPER	85801065GY	AWG22 1/0.65 TIN COATING	
R501	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R502	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R503	R CARBON FILM	RD-AZ332J-	1/6 3.3K OHM J	
R504	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R505	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R506	R CARBON FILM	RD-AZ332J-	1/6 3.3K OHM J	
R507	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R508	R CARBON FILM	RD-AZ332J-	1/6 3.3K OHM J	
R509	R CARBON FILM	RD-AZ681J-	1/6 680 OHM J	
R512	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R513	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R514	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R515	R CARBON FILM	RD-AZ153J-	1/6 15K OHM J	
R516	R CARBON FILM	RD-AZ393J-	1/6 39K OHM J	
R517	R CARBON FILM	RD-4Z181J-	1/4 180 OHM J	
R518	R CARBON FILM	RD-AZ273J-	1/6 27K OHM J	
R520	R CARBON FILM	RD-AZ333J-	1/6 33K OHM J	
R521	R CARBON FILM	RD-AZ391J-	1/6 390 OHM J	
R522	R CARBON FILM	RD-AZ221J-	1/6 220 OHM J	
R523	R CARBON FILM	RD-AZ331J-	1/6 330 OHM J	
R524	R CARBON FILM	RD-AZ561J-	1/6 560 OHM J	
R525	R CARBON FILM	RD-AZ104J-	1/6 100K OHM J	
R526	R CARBON FILM	RD-AZ479J-	1/6 4.7 OHM J	
R527	R CARBON FILM	RD-AZ431J-	1/6 430 OHM J	
R528	R CARBON FILM	RD-AZ221J-	1/6 220 OHM J	
R530	R CARBON FILM	RD-AZ470J-	1/6 47 OHM J	
R531	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R533	R CARBON FILM	RD-AZ103J-	1/6 10K OHM J	
R537	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R538	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R539	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R540	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R541	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R543	R CARBON FILM	RD-AZ472J-	1/6 4.7K OHM J	
R545	R CARBON FILM	RD-AZ682J-	1/6 6.8K OHM J	
R547	R CARBON FILM	RD-AZ103J-	1/6 10K OHM J	
R548	R CARBON FILM	RD-AZ472J-	1/6 4.7K OHM J	
R549	R CARBON FILM	RD-AZ472J-	1/6 4.7K OHM J	

LOC	PART NAME	PART Code	PART Description	Remark
R550	R CARBON FILM	RD-AZ472J-	1/6 4.7K OHM J	
R555	R CARBON FILM	RD-AZ103J-	1/6 10K OHM J	
R556	R CARBON FILM	RD-AZ472J-	1/6 4.7K OHM J	29 inch
	R CARBON FILM	RD-AZ512J-	1/6 5.1K OHM J	25 inch
R567	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R570	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R580	R CARBON FILM	RD-4Z271J-	1/4 270 OHM J	
R585	R CARBON FILM	RD-AZ224J-	1/6 220K OHM J	
R586	R CARBON FILM	RD-AZ221J-	1/6 220 OHM J	
R597	R METAL FILM	RN-4Z1502F	1/4 15K OHM F	
R598	R METAL FILM	RN-4Z1502F	1/4 15K OHM F	
R599	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R605	R CARBON FILM	RD-AZ751J-	1/6 750 OHM J	
R606	R CARBON FILM	RD-AZ751J-	1/6 750 OHM J	
R608	R CARBON FILM	RD-2Z151J-	1/2 150 OHM J	
R609	R CARBON FILM	RD-2Z151J-	1/2 150 OHM J	
R610	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R611	R CARBON FILM	RD-AZ104J-	1/6 100K OHM J	
R614	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R615	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R620	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R621	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R622	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R650	R CARBON FILM	RD-AZ822J-	1/6 8.2K OHM J	
R660	R CARBON FILM	RD-AZ822J-	1/6 8.2K OHM J	
R661	R CARBON FILM	RD-AZ752J-	1/6 7.5K OHM J	
R662	R CARBON FILM	RD-AZ752J-	1/6 7.5K OHM J	
R663	R CARBON FILM	RD-4Z829J-	1/4 8.2 OHM J	
R664	R CARBON FILM	RD-4Z829J-	1/4 8.2 OHM J	
R700	R CARBON FILM	RD-2Z332J-	1/2 3.3K OHM J	
R710	R CARBON FILM	RD-AZ201J-	1/6 200 OHM J	
R711	R CARBON FILM	RD-AZ271J-	1/6 270 OHM J	
R713	R CARBON FILM	RD-AZ331J-	1/6 330 OHM J	
R720	R CARBON FILM	RD-AZ122J-	1/6 1.2K OHM J	
R721	R CARBON FILM	RD-AZ181J-	1/6 180 OHM J	
R722	R CARBON FILM	RD-AZ221J-	1/6 220 OHM J	
R723	R CARBON FILM	RD-AZ331J-	1/6 330 OHM J	
R724	R CARBON FILM	RD-AZ471J-	1/6 470 OHM J	
R726	WIRE COPPER	85801065GY	AWG22 1/0.65 TIN COATING	
R801	POSISTOR	DPC7R0M290	2322 662 96709	COMPATIBLE
		DDC7R0M290	ECPCD7R0M290	
R802	R M-OXIDE FILM	RS02Z753JS	2W 75K OHM J SMALL	
R804	R FUSIBLE	RF02Z158K-	2W 0.15 OHM K (TAPPING)	
R805	R CARBON FILM	RD-2Z100J-	1/2 10 OHM J	
R806	R CARBON FILM	RD-4Z472J-	1/4 4.7K OHM J	
R807	R CARBON FILM	RD-2Z272J-	1/2 2.7K OHM J	

Service Manual CP-785A

LOC	PART NAME	PART Code	PART Description	Remark
R808	R CARBON FILM	RD-4Z911J-	1/4 910 OHM J	29 inch
	R CARBON FILM	RD-4Z102J-	1/4 1K OHM J	25 inch
R810	R CARBON FILM	RD-4Z102J-	1/4 1K OHM J	
R811	R CARBON COMP	RC-2Z565KP	1/2 5.6M OHM K	(!)
R817	R CARBON FILM	RD-AZ473J-	1/6 47K OHM J	
R819	R CEMENT	RX10B339JQ	10W 3.3 OHM J BEN 25MM 4P	
R820	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R821	R CARBON FILM	RD-4Z102J-	1/4 1K OHM J	
R823	R CARBON FILM	RD-4Z331J-	1/4 330 OHM J	When I806 is DP142 (or SE140)
	R CARBON FILM	RD-4Z512J-	1/4 5.1K OHM J	When I806 is SE130
R829	R CARBON FILM	RD-AZ223J-	1/6 22K OHM J	
R830	R CARBON FILM	RD-AZ332J-	1/6 3.3K OHM J	
R840	R CARBON FILM	RD-4Z220J-	1/4 22 OHM J	
R841	R CARBON FILM	RD-2Z479J-	1/2 4.7 OHM J	
R842	R CARBON FILM	RD-2Z479J-	1/2 4.7 OHM J	
R843	R CARBON FILM	RD-AZ561J-	1/6 560 OHM J	
R844	WIRE COPPER	85801065GY	AWG22 1/0.65 TIN COATING	
R850	R CARBON FILM	RD-2Z479J-	1/2 4.7 OHM J	
R855	R CARBON FILM	RD-4Z185J-	1/4 1.8M OHM J	
R870	R CARBON FILM	RD-2Z222J-	1/2 2.2K OHM J	
R888	R CARBON FILM	RD-AZ103J-	1/6 10K OHM J	
R910	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R911	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R912	R CARBON FILM	RD-AZ101J-	1/6 100 OHM J	
R913	R CARBON COMP	RC-2Z102K-	1/2 1K OHM K	
R914	R CARBON COMP	RC-2Z102K-	1/2 1K OHM K	
R915	R CARBON COMP	RC-2Z102K-	1/2 1K OHM K	
R920	R M-OXIDE FILM	RS01Z569J-	1W 5.6 OHM J (TAPPING)	29 inch
	R M-OXIDE FILM	RS01Z249J-	1W 2.4 OHM J (TAPPING)	25 inch
R921	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R922	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R923	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
R924	R CARBON FILM	RD-4Z105J-	1/4 1M OHM J	
R925	R CARBON FILM	RD-4Z102J-	1/4 1K OHM J	
RA01	R CARBON FILM	RD-AZ680J-	1/6 68 OHM J	
RA11	R CARBON FILM	RD-AZ680J-	1/6 68 OHM J	
RA12	R CARBON FILM	RD-AZ680J-	1/6 68 OHM J	
RA16	R CARBON FILM	RD-AZ680J-	1/6 68 OHM J	
RA20	R CARBON FILM	RD-AZ473J-	1/6 47K OHM J	
RA21	R CARBON FILM	RD-AZ473J-	1/6 47K OHM J	
RA40	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
RA41	R CARBON FILM	RD-AZ102J-	1/6 1K OHM J	
SCT1	SOCKET CRT	4859303530 4859303830	PCS629-03C ISMG94S	COMPATIBLE (!)
SF01	FILTER SAW	5PK3953M--	K3953M	
SF02	FILTER SAW	5PK9650M--	K9650M	

LOC	PART NAME	PART Code	PART Description	Remark
SW700	SW TACT	5S50101090	THVH472GCA	FS-xxT90
SW701	SW TACT	5S50101090	THVH472GCA	FS-xxT90
SW702	SW TACT	5S50101090	THVH472GCA	FS-xxT90
SW703	SW TACT	5S50101090	THVH472GCA	FS-xxT90
SW704	SW TACT	5S50101090	THVH472GCA	FS-xxT90
SW801	SW POWER PUSH	5S40101143	PS3-22SP (P.C.B)	FS-xxT90 (!)
T401	TRANS DRIVE	50D19A1---	TD-19A1	
T402	FBT (old)	50H0000181	1352.5008E	compatible
	FBT (new)	50H0000247	FFA64028L	
T801	TRANS SMPS	50M4950A8-	TSM-4950A8	(!)
U100	TUNER VARACTOR	4859721530	DT5-BF18D N	
X502	CRYSTAL QUARTZ	5XE12R000E	HC-49/U 12.00000MHZ 30PPM	
X601	CRYSTAL QUARTZ	5XE18R432E	HC-49/U 18.43200MHZ 30PPM	
Z501	FILTER CERA	5PYXT5R5MB	XT 5.5MB	

6-4-3. Control Assembly Parts Lists

- Applied Models : DTE-25G4,29G4 (FS-68V81,59V81)


LOC	PART NAME	PART Code	PART Description	Remark
A001	PCB CONTROL	4859833214	56X246(246X246/4) S1B	
C690	C ELECTRO	CEXF1H479V	50V RSS 4.7MF (5X11) TP	
C691	C ELECTRO	CEXF1H479V	50V RSS 4.7MF (5X11) TP	
CF01	C CERA	CCXF1H103Z	50V F 0.01MF Z (TAPPING)	
CF02	C ELECTRO	CEXF1C101V	16V RSS 100MF (6.3X11) TP	
D100	LED BLOCK	DLH3PRG---	LH-3P-RG	
HP01	JACK EARPHONE	4859102130	YSC-1537	
I703	IC PREAMP	1TS0P1238W	TS0P1238W11	
JPA3	JACK PIN BOARD	4859108450	YSC03P-4120-14A	
M381	FRAME SUB PCB	4853816410	FR HIPS BK	
P1	CONNECTOR	4850709S01	YH025-09+YST025+ULW=200	
P701A	CONNECTOR	4850706S01	YH025-06+YBNH250+ULW=200	
P803	CONN WAFER	4859242220	YFW800-02	
P803A	CONNECTOR	4850702S17	YFH800-02+YDT235+USW=200	
R608	R CARBON FILM	RD-2Z151J-	1/2 150 OHM J	
R609	R CARBON FILM	RD-2Z151J-	1/2 150 OHM J	
R721	R CARBON FILM	RD-AZ181J-	1/6 180 OHM J	
R722	R CARBON FILM	RD-AZ221J-	1/6 220 OHM J	
R723	R CARBON FILM	RD-AZ331J-	1/6 330 OHM J	
R724	R CARBON FILM	RD-AZ471J-	1/6 470 OHM J	
SW700	SW TACT	5S50101090	THVH472GCA	
SW701	SW TACT	5S50101090	THVH472GCA	
SW702	SW TACT	5S50101090	THVH472GCA	
SW703	SW TACT	5S50101090	THVH472GCA	
SW704	SW TACT	5S50101090	THVH472GCA	
SW801	SW POWER PUSH	5S40101143	PS3-22SP (P.C.B)	!

7. Compatible Components List of FS-xxT90 & FS-xxV81


Part Name	Applied Locations	Original		Compatible Components		Manufacturer
		Part Code	Part Description	Part Code	Part Description	Manufacturer
C ELECTRO	C813	CEYF2D101V	200V RSS 100MF (16X31.5)	CEXF2C101V	160V RSS 100MF (16X25) TP	-
C ELECTRO	C814	CEXF2E470V	250V RSS 47MF (16X25) TP	CEXF2C101V	160V RSS 100MF (16X25) TP	-
C ELECTRO	C805	CEYN2W151P	450V LHS 150MF (25X40)	CEYN2G181P	400V LHS 180MF (25X35)	-
C CERA AC	C812	CH1AFE472M	4KV 4700PF M KX DE1610	CH1BFE472M	AC400V 4700PF M UICV	-
C CERA	C103 and more	CCZB1H102K	50V B 1000PF K	CCXB1H102K	50V B 1000PF K	-
C CERA	C513 and more	CBZF1H104Z	50V F 0.1MF Z	CBXF1H104Z	50V F 0.1MF Z	-
C CERA	C533	CCZB1H102K	50V B 1000PF K	CCXB1H102K	50V B 1000PF K	-
C CERA	C534 and more	CCZF1H223Z	50V F 0.022MF Z	CCXF1H223Z	50V F 0.022MF Z	-
C CERA	C577	CCZB1H561K	50V B 560PF K	CCXB1H561K	50V B 560PF K	-
C CERA	C650 and more	CZSL1H470J	50V SL 47PF J	CXGH1H470J	50V CH 47PF J	-
C CERA	" C771,C830 "	CBZF1H104Z	50V F 0.1MF Z	CBXF1H104Z	50V F 0.1MF Z	-
C CERA	C809	CCZB1H102K	50V B 1000PF K	CCXB1H102K	50V B 1000PF K	-
C CERA	" C665,C667 "	CBZR1C472M	16V Y5R 4700PF M	CCXB1H472K	50V B 4700PF K	-
DIODE ZENER	I805	1UPC574J--	UPC574J	DUZ33B----	UZ-33B	-
DIODE	D403	DDG3-----	DG3	DDGP30L----	DGP30L	-
IC REGULATOR	I822 (old PCB)	1KA7808----	KAT7808	1K1A7805P1-	K1A7808API	KEC
				1L7805CV----	L7808CV	STM
IC REGULATOR	I820	1KA7805----	KAT7805	1K1A7805P1-	K1A7805API	KEC
				1L7805CV--	L7805CV	STM
IC REGULATOR	I823	1LP295033-	LP2950 3.3V	1LE33CZ----	LE33CZ	STM
IC PHOTO COUPLER	I804	1KP1010C--	KP-1010C	1PC817C----	PC817C	SHARP
				1LTV817C--	LTV817C	LITEON
IC SOUND PROCESSOR	I601	1MSP3415D	MSP3415D-PP-B8	1MSP3410D-	MSP3415D-PP-B8	MICRONAS
				1MSP3410C5	MSP3410D-PP-B8-V3	-
IC EEPROM	I702	1AT24C08PC	AT24C08-10PC	124LC08B--	24LC08B	MICROCHIP
				1CAT24C08P	CAT24WC08P	CATALYST
				1M24C08BN6	M24C08-BN6	STM
IC SMPS	I801	1STRF6654-	STR-F6654	1STRF6653-	STR-F6653	SANKEN
TR	" Q501,Q601 "	TKTA1266Y-	KTA1266Y (TP)	TKSA733CY-	KSA733CY	FAIRCHILD
				TSTA933Y--	STA945Y	AUK
TR	Q101 and More	TKTC3198Y-	KTC3198Y	TKSC945CY	KSC945CY	FAIRCHILD
				TSTC1740Y-	STC1740Y	AUK
TR	Q401	T2SD2553--	2SD2553	TST2009DH1	ST2009DHI	STM
						compatible (only FS-xxV81,xxT90)

Axial Type & Radial Type


8-1 Exploded view(DTE-25G5THS)

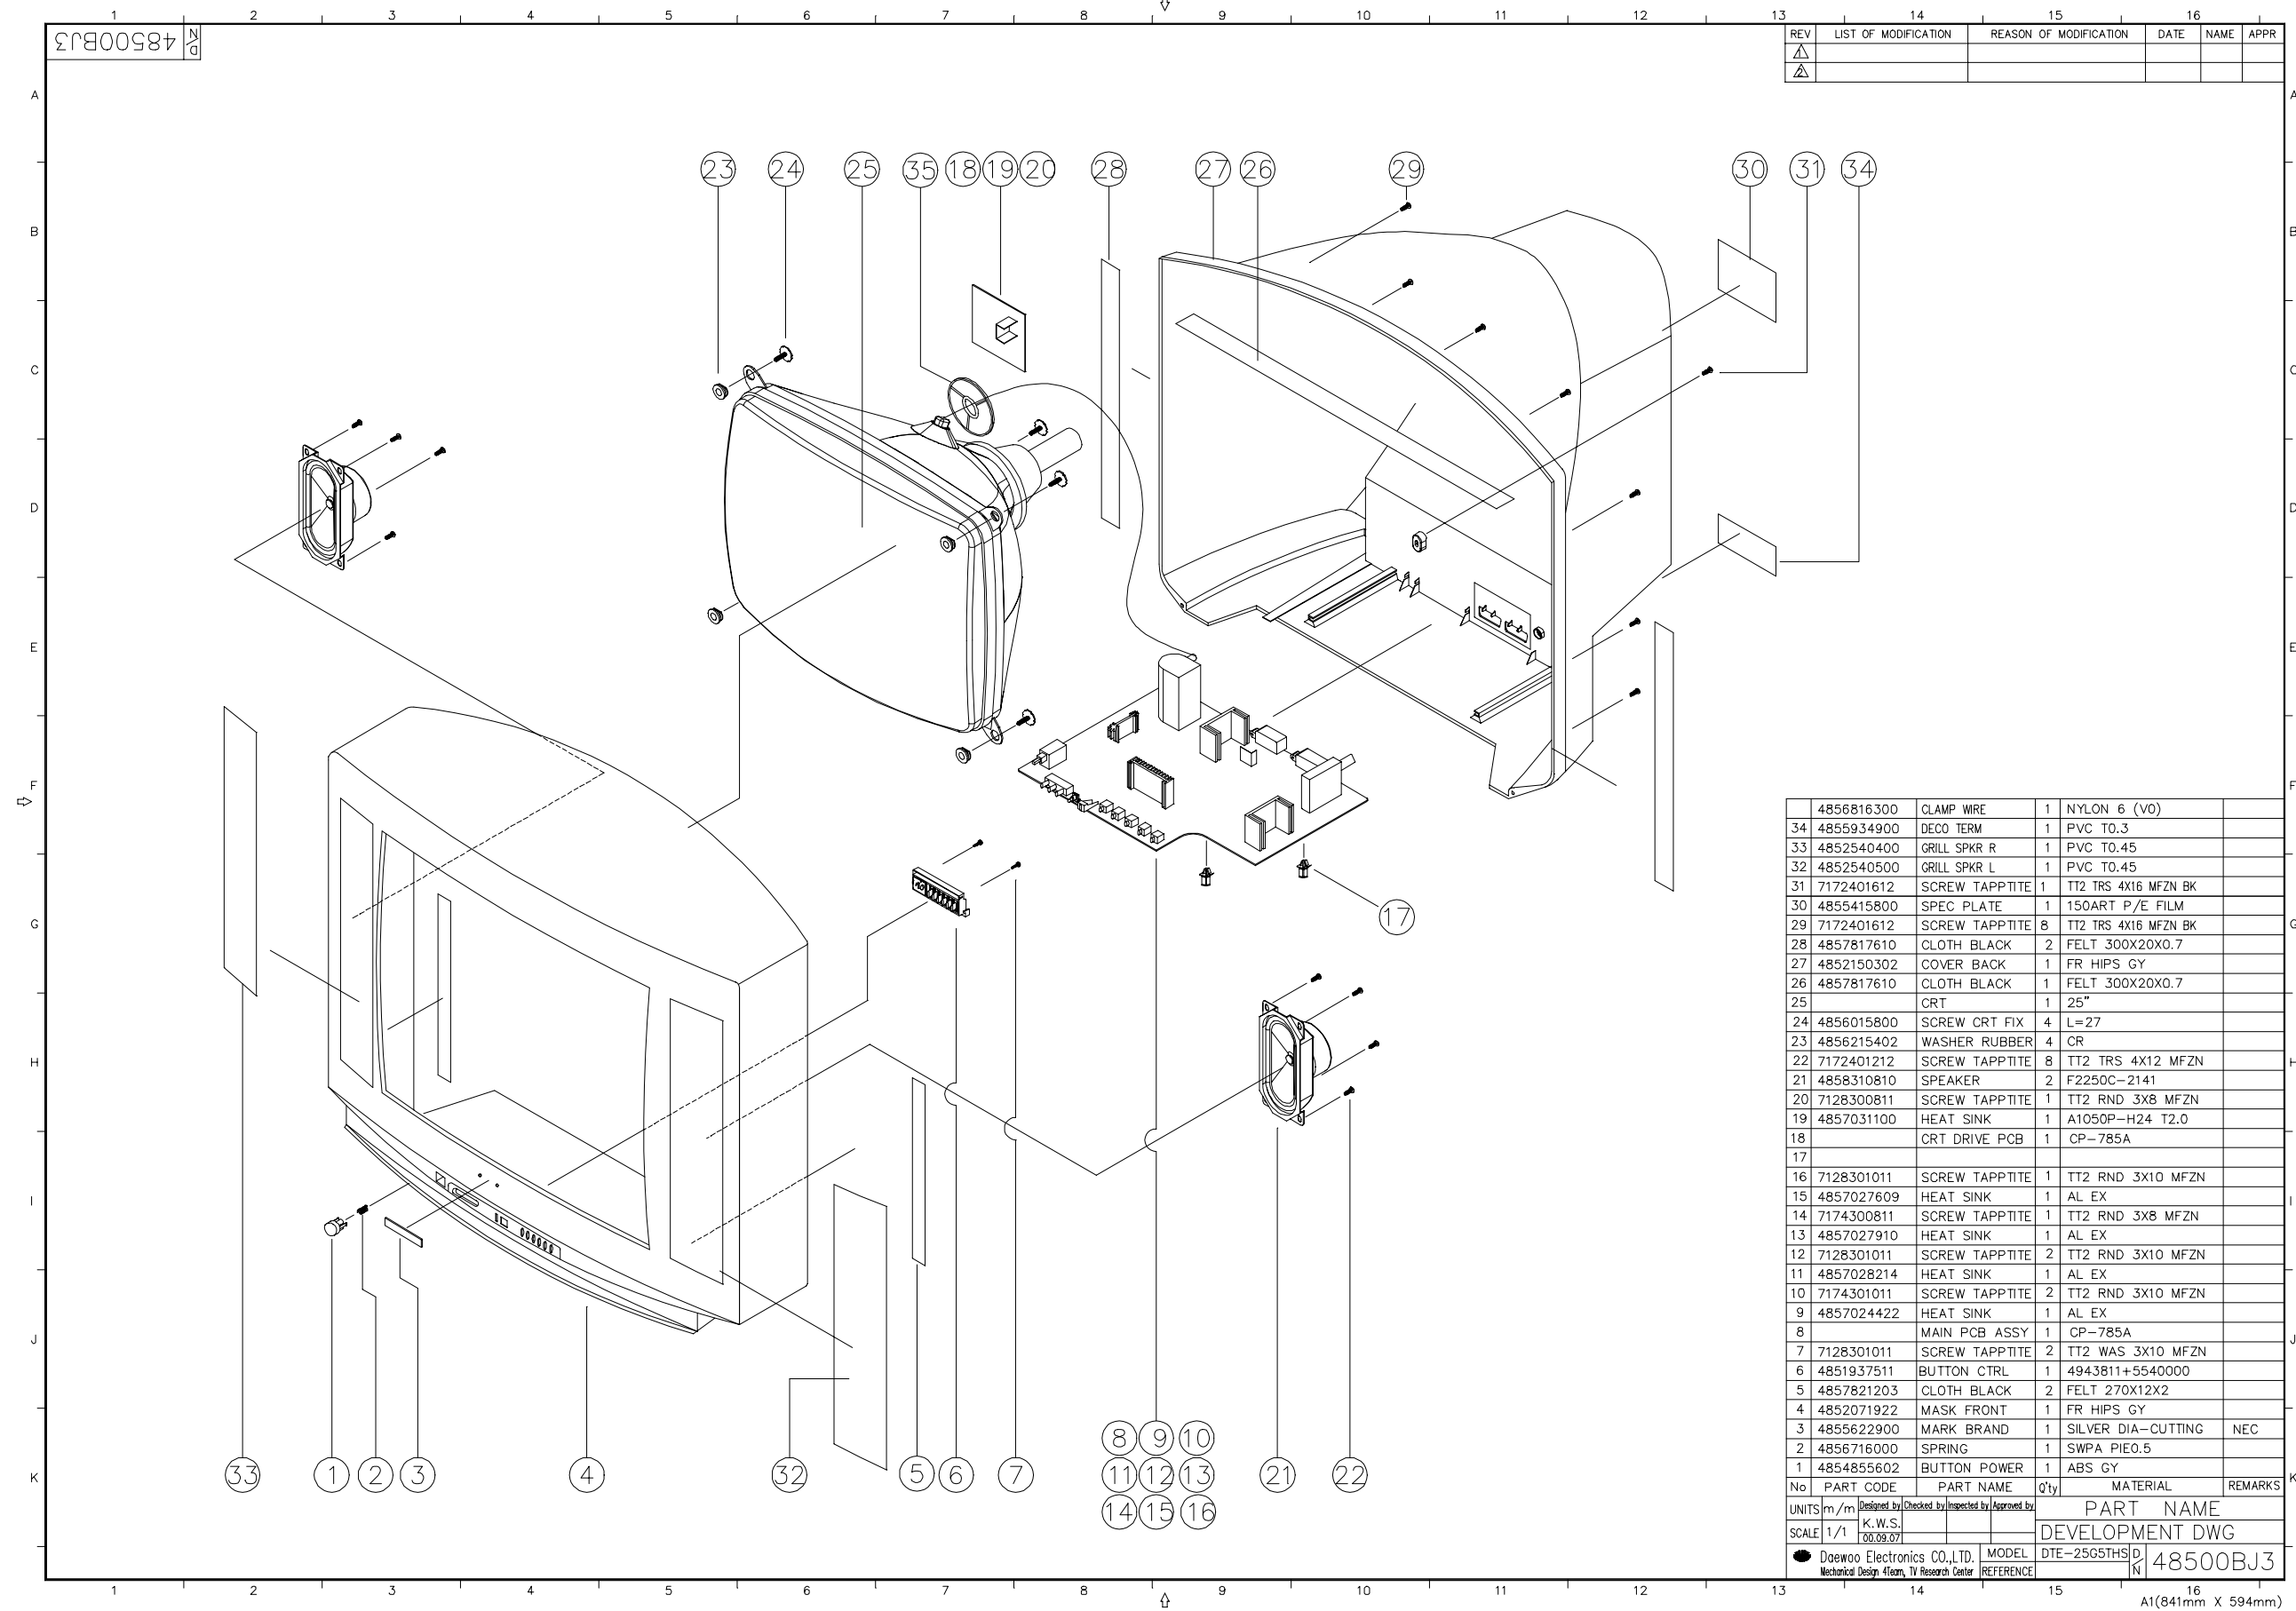


9. PCB Layout
9-1. Old Main PCB

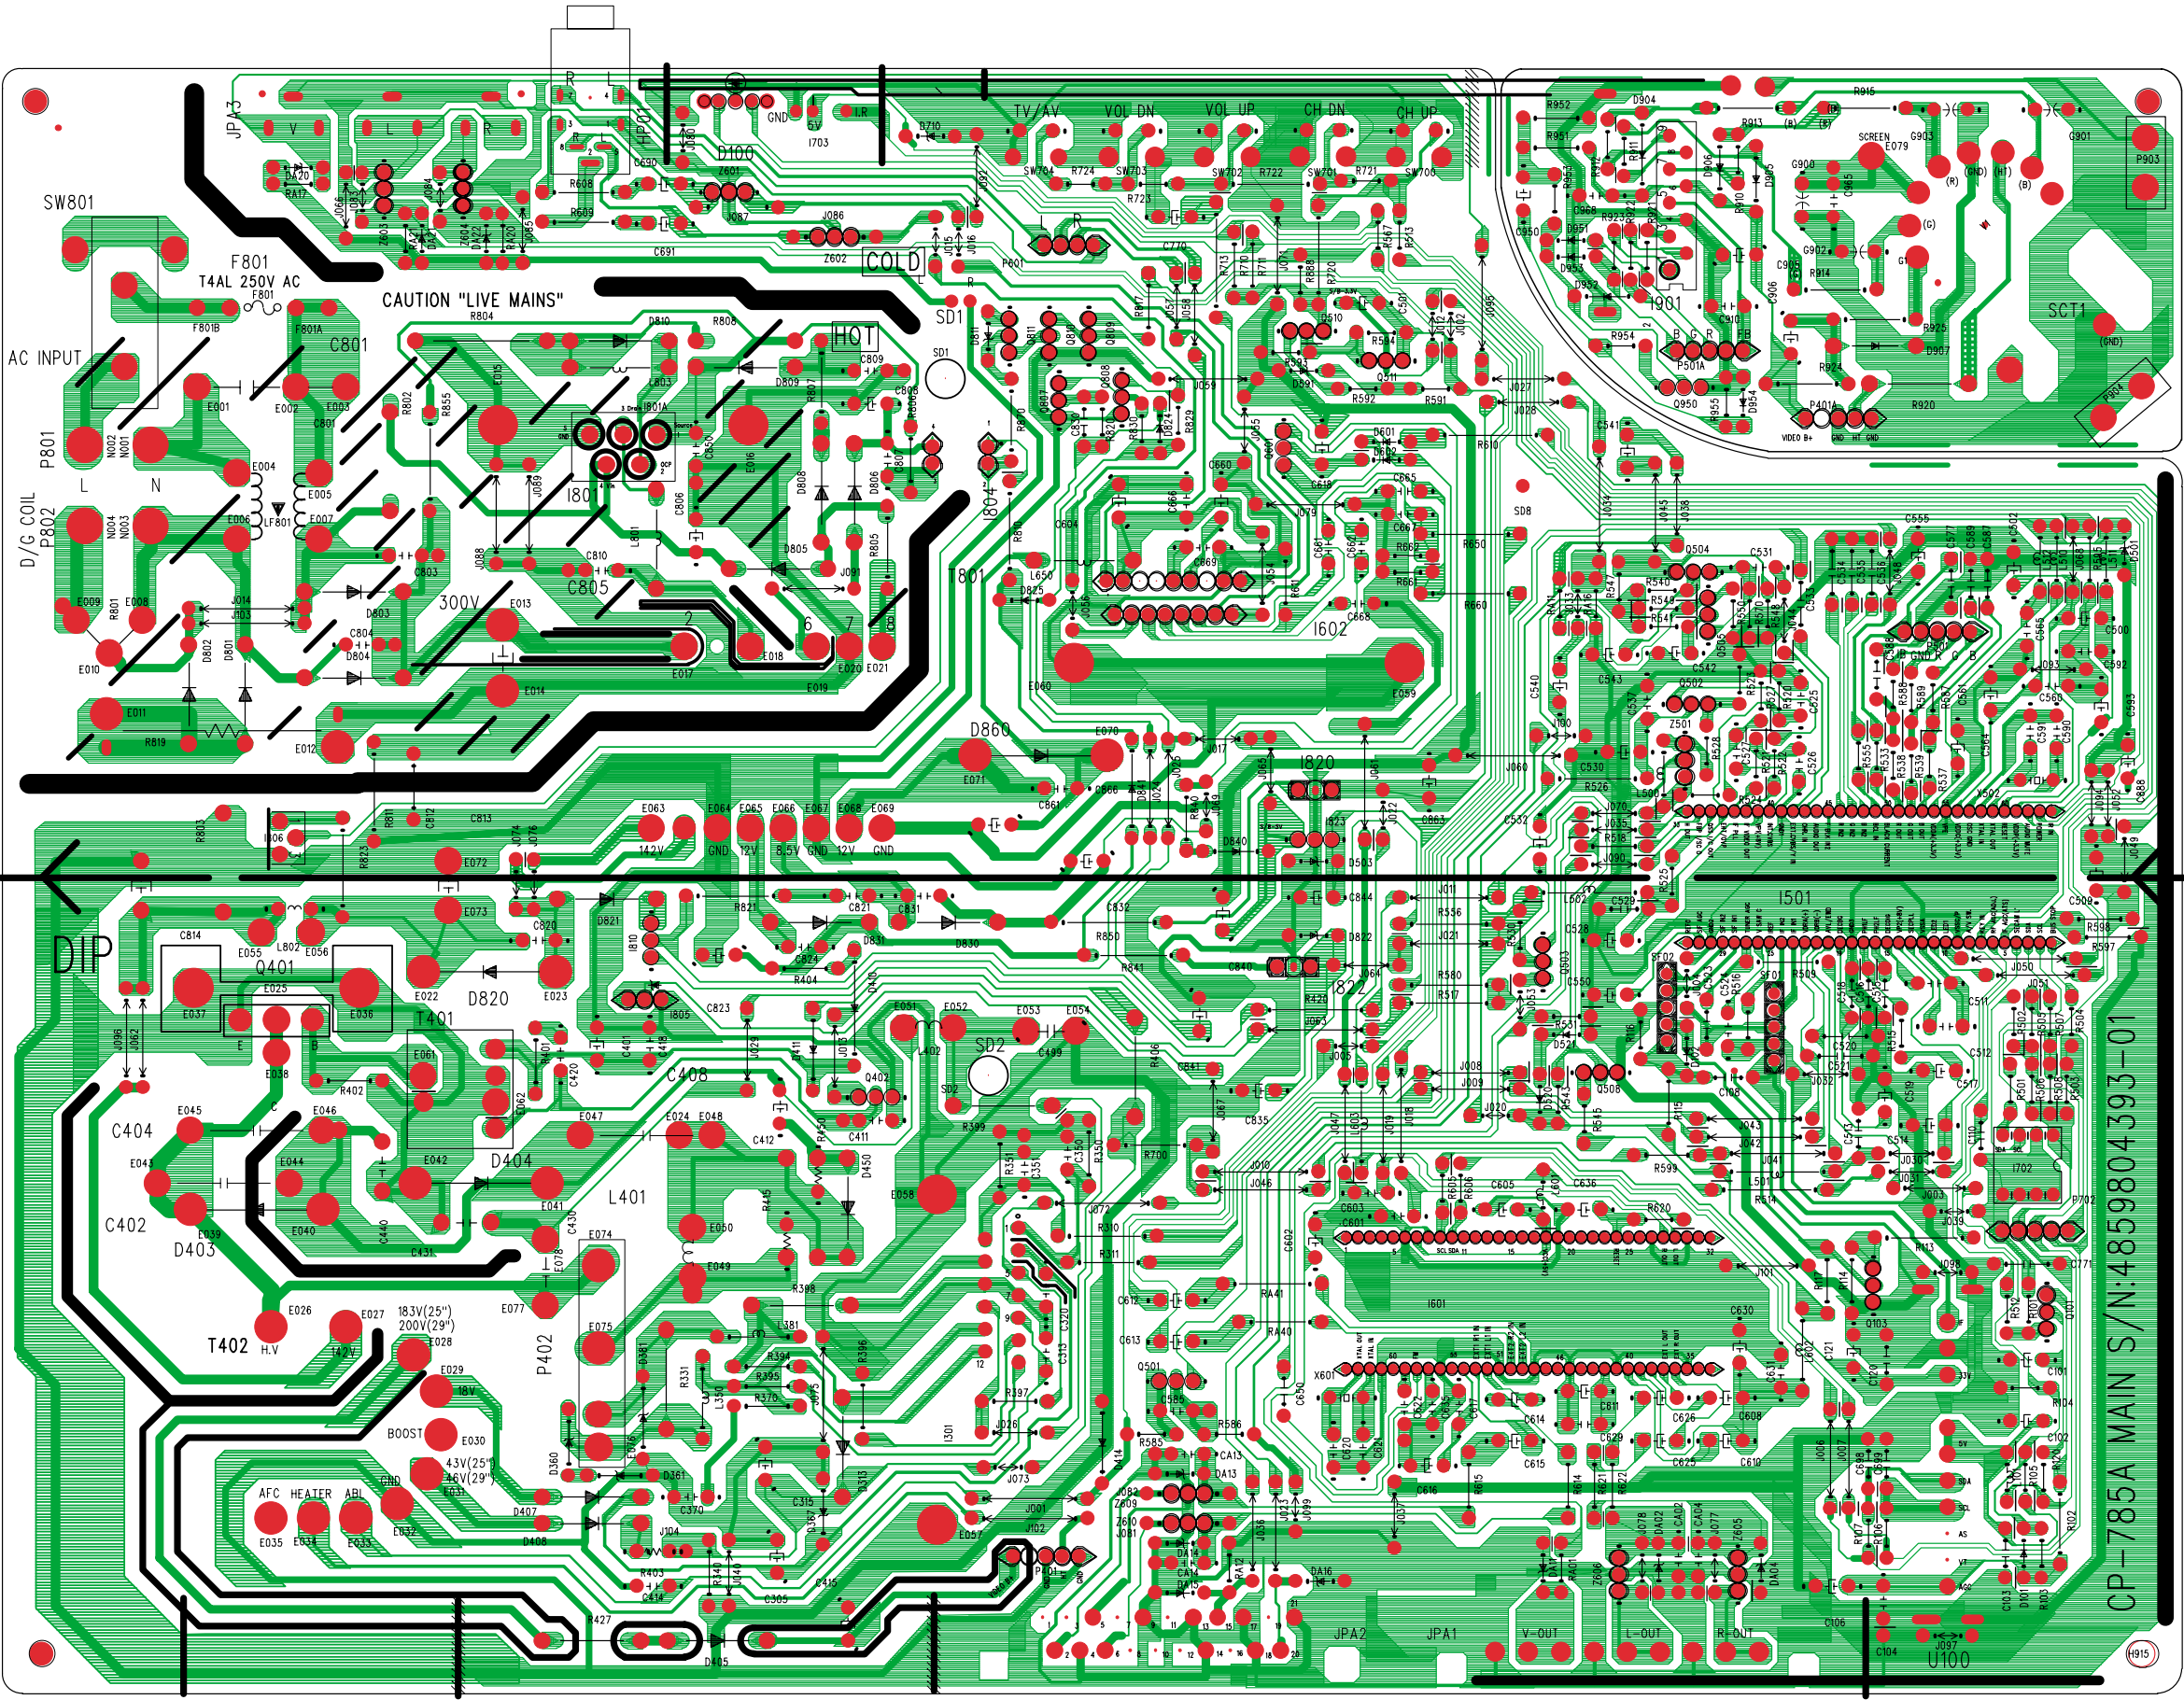


9-2. New Main PCB

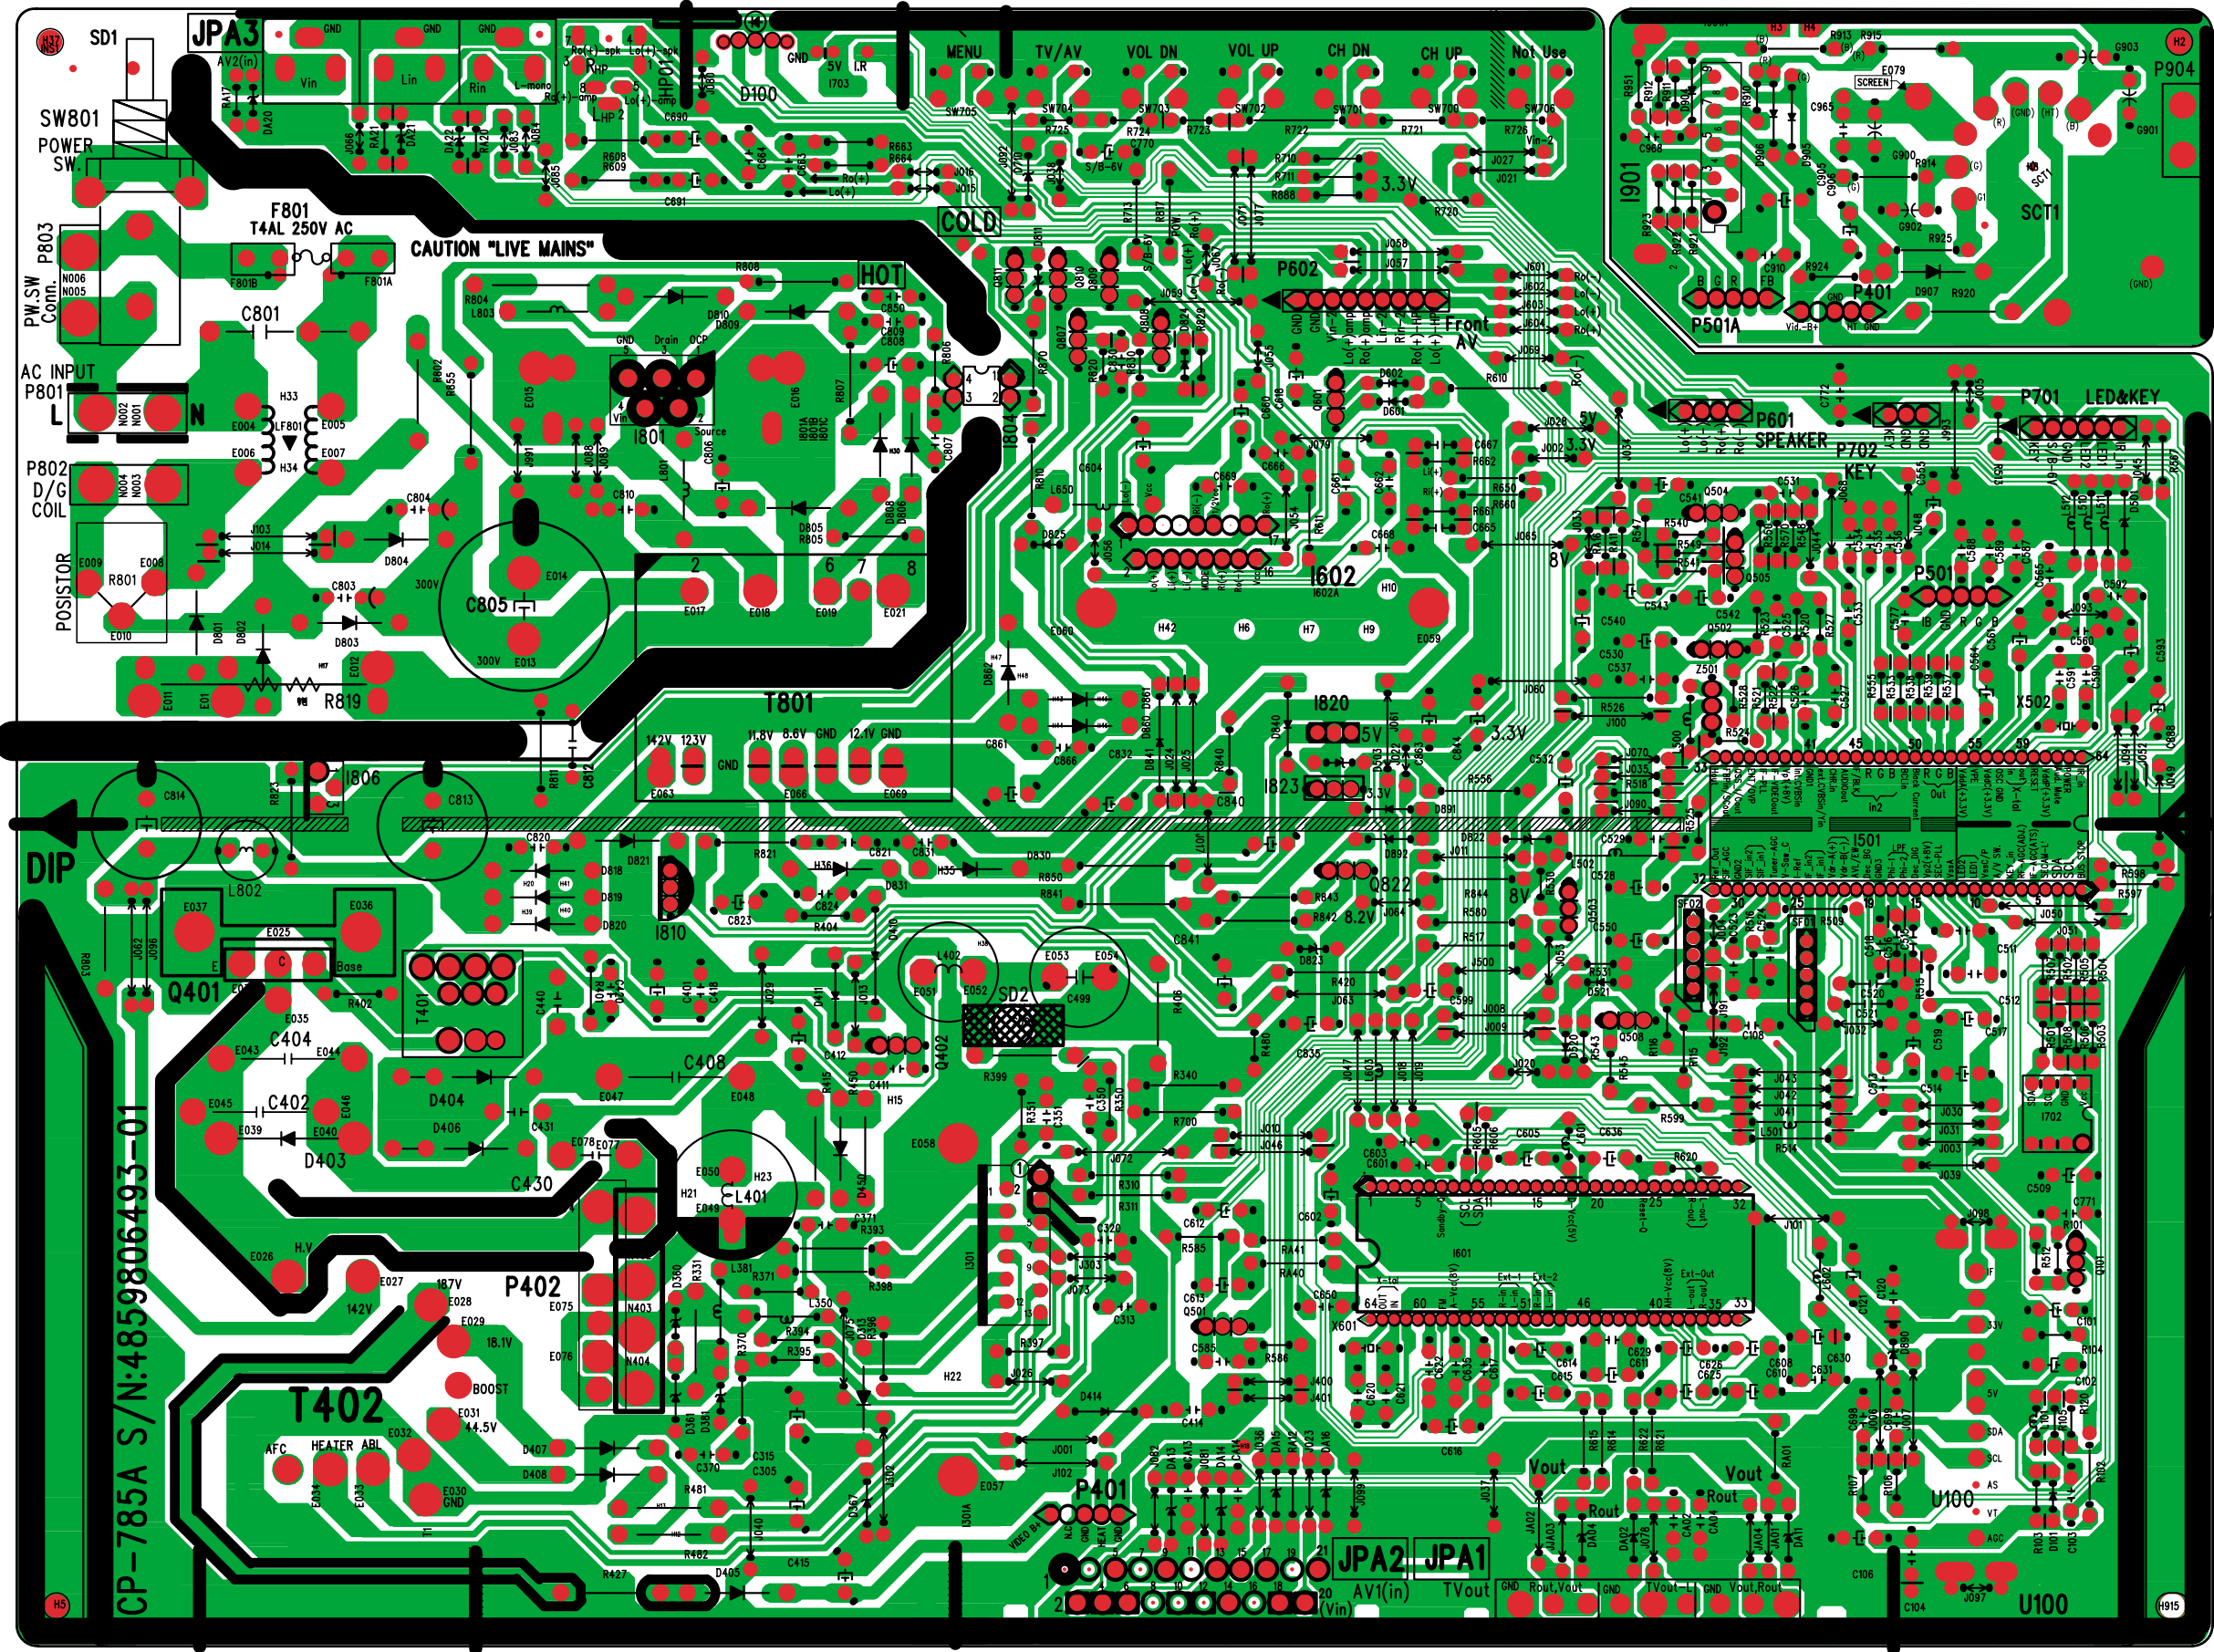

9-3. Control PCB

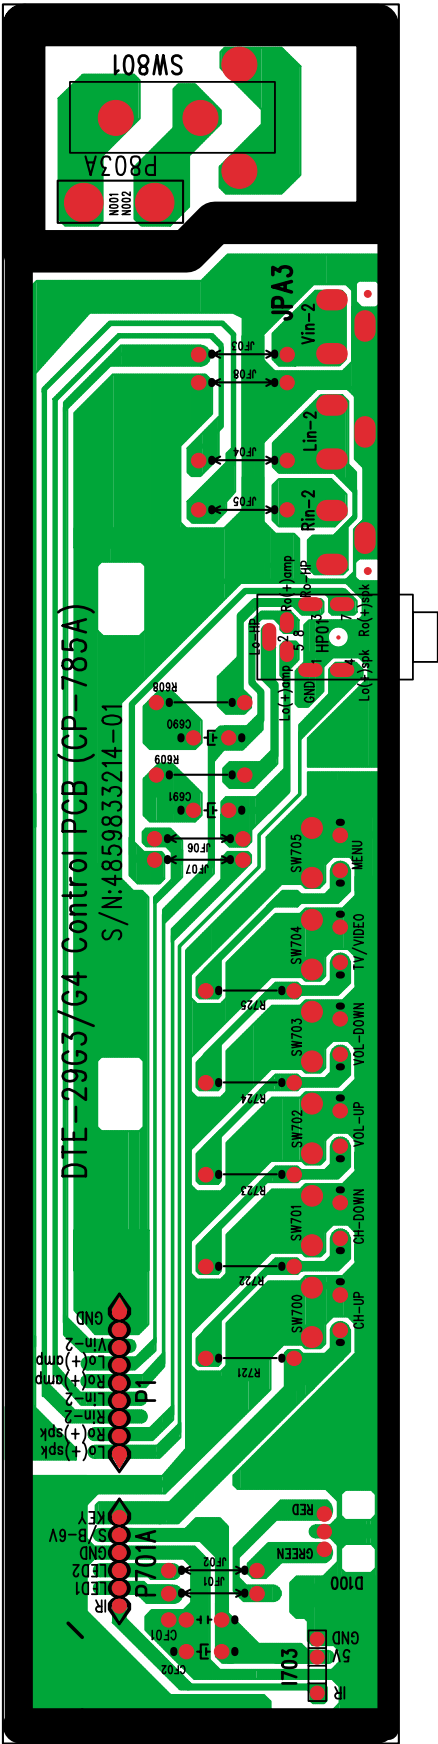

10. Circuit Diagram
10-1 Old Main PCB

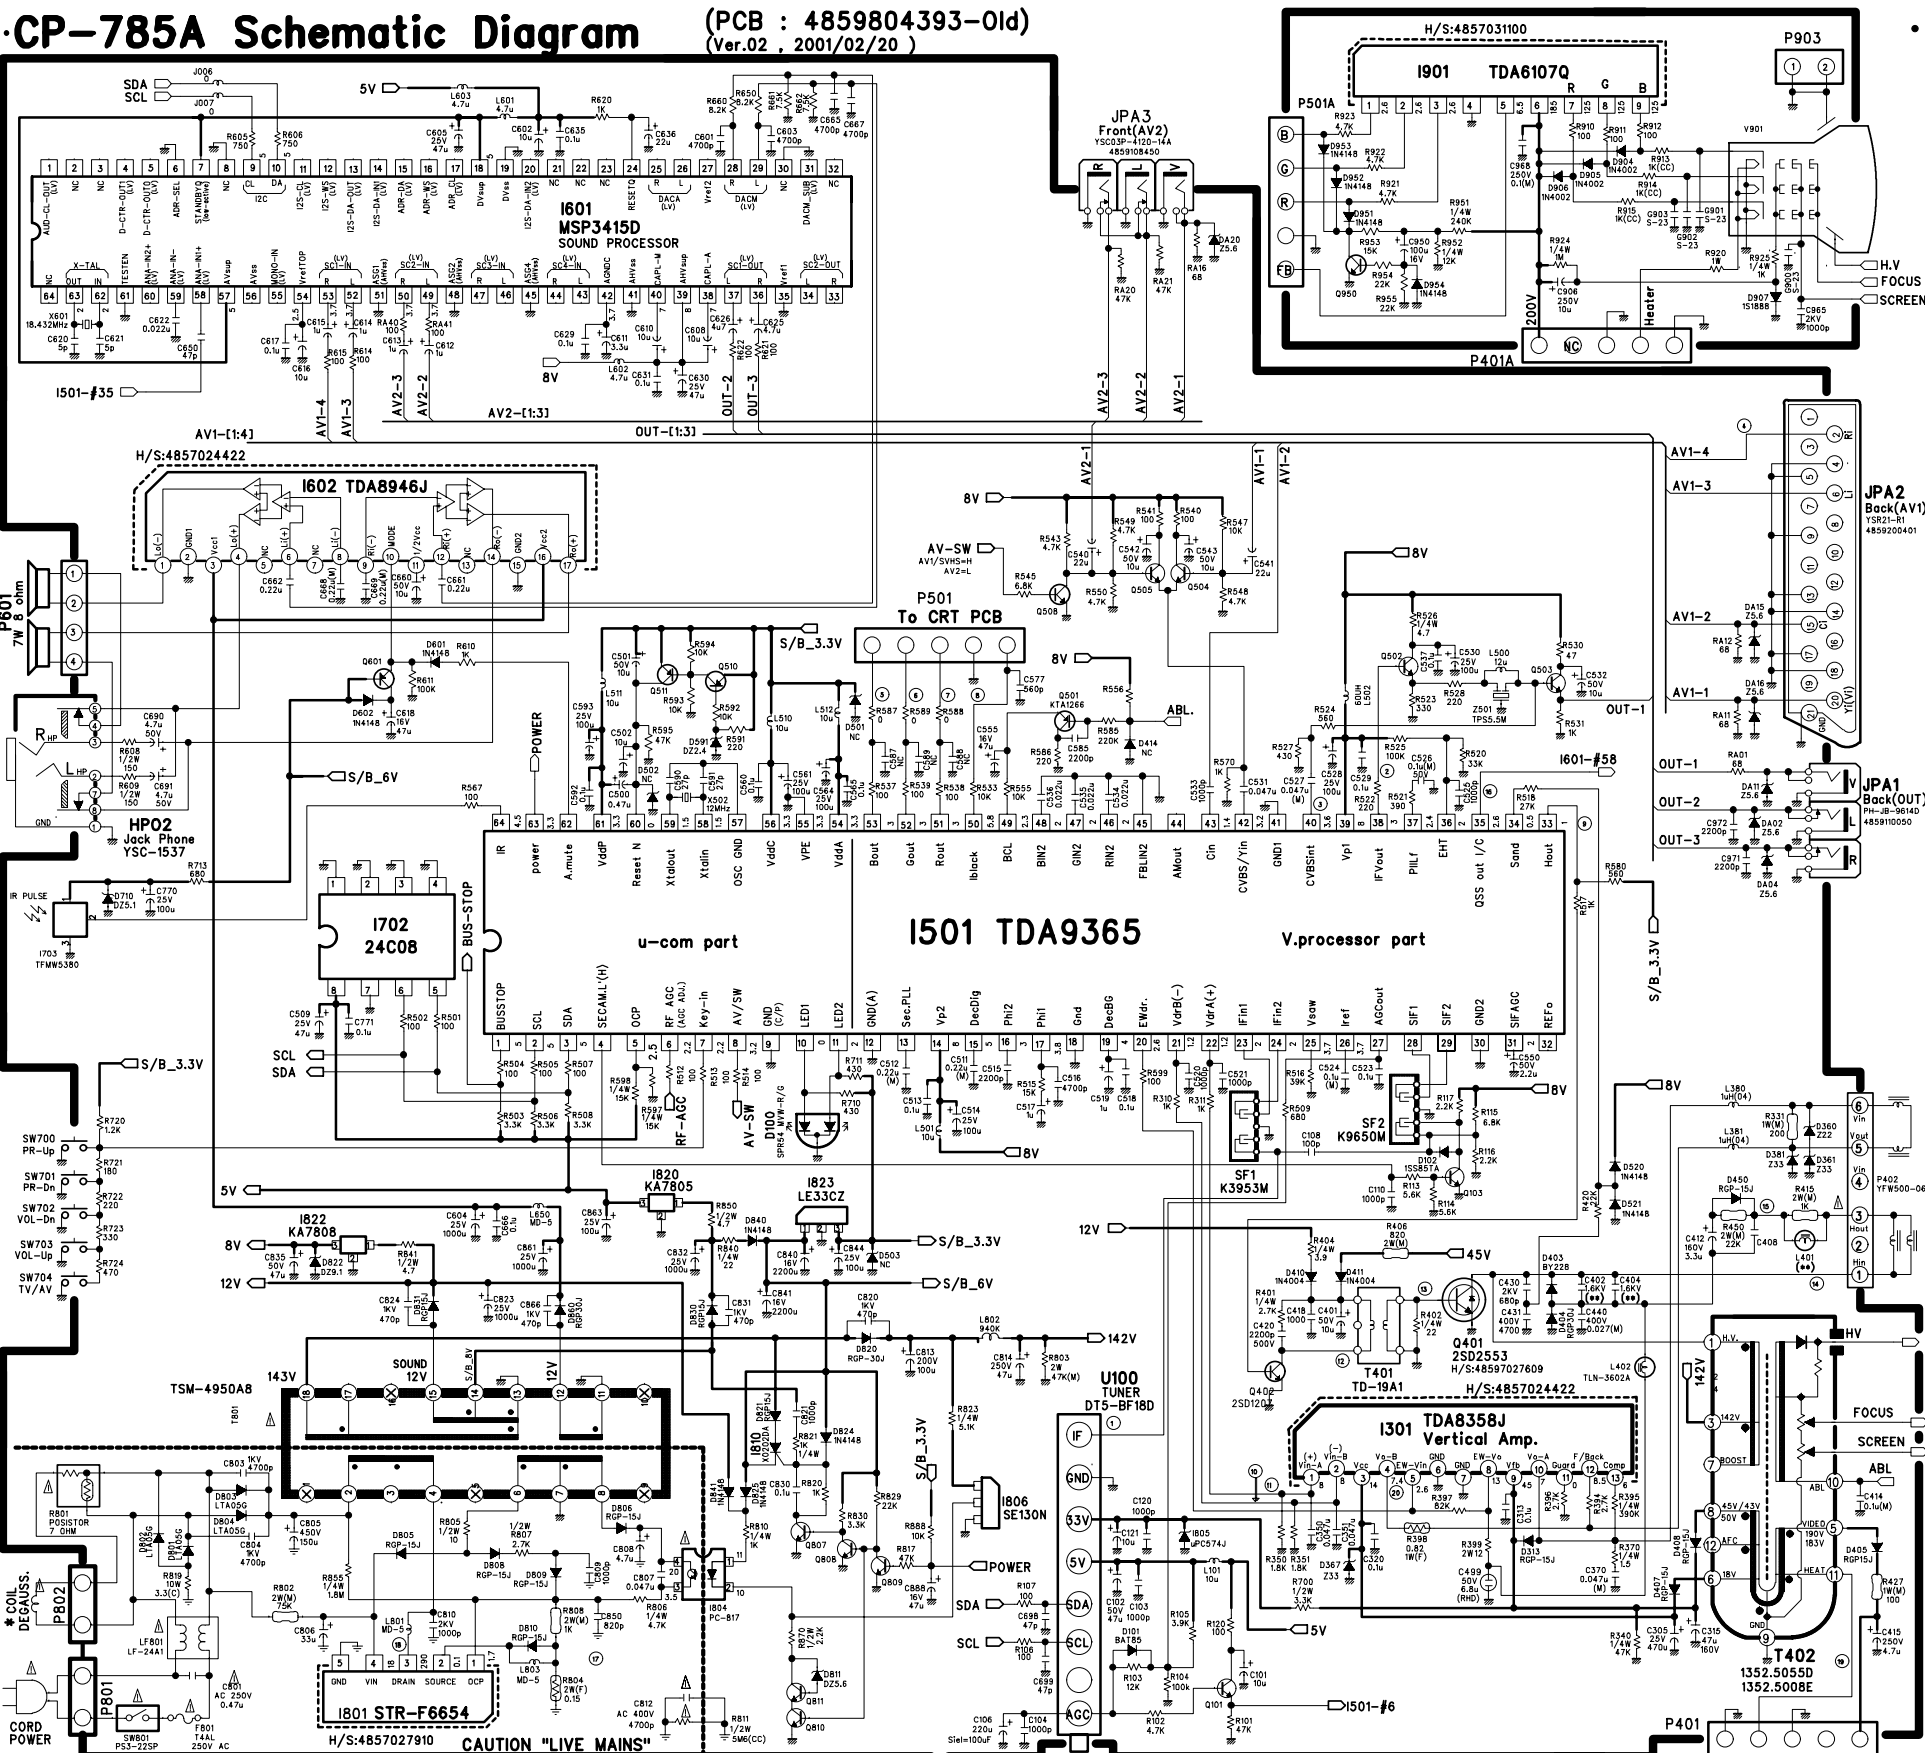

• **PRODUCT SAFETY NOTE :**
THE COMPONENTS MARKED WITH Δ ARE IMPORTANT FOR MAINTAINING THE SAFETY OF THE SET AND SHOULD BE REPLACED ONLY WITH TYPES IDENTICAL TO THOSE IN THE ORIGINAL OR SPECIFIED ONE IN THE PART LIST. DON'T DEGRADE THE SAFETY OF THE SET THROUGH IMPROPER SERVICING.


NOTE:
1. RESISTANCE IS SHOWN IN OHM. K=1000, M=1000000
2. UNLESS OTHERWISE NOTED IN SCHEMATIC ALL CAPACITOR VALUES ARE EXPRESSED IN μ F
3. VOLTAGES READ WITH "VTVM" FROM POINT INDICATED TO CHASSIS GROUND USING A COLOR BAR SIGNAL WITH ALL CONTROLS AT NORMAL LINE 230V AC VOLTAGE READINGS SHOWN ARE NORMAL VALUES AND MAY VARY $\pm 20\%$ EXCEPT H.V
4. THIS CIRCUIT DIAGRAM IS A STANDARD ONE CIRCUIT PRINTED MAY BE SUBJECT TO CHANGE FOR PRODUCT IMPROVEMENT WITHOUT PRIOR NOTICE

WARNING:
BEFORE SERVICING THE CHASSIS, READ "X-RAY RADIATION", "SAFETY PRECAUTION", AND "PRODUCT SAFETY NOTICE" IN SERVICE MANUAL


CAUTION TO SERVICE TECHNICIANS:
BEFORE RETURNING THE RECEIVER TO CUSTOMER, LEAKAGE CURRENT OR RESISTANCE MEASUREMENTS SHOULD BE PERFORMED TO DETERMINE THAT EXPOSED PARTS ARE PROPERLY INSULATED FROM THE SUPPLY CIRCUIT.

RESISTOR	CAPACITOR	COIL
CARBON FILM R M-OXIDE CARBON COMP FUSIBLE CEMENT	ELECTRO CERAMIC CERAMIC CH ELECTRO NONPOLAR MYLAR	PEAKING CHOKE BEAD
Δ Δ Δ Δ Δ	Δ Δ Δ Δ Δ	Δ Δ Δ Δ Δ
(M) (CC) (F) (C)	(M) (CH) (NP) (W)	(C) (B)

THE DIFFERENT PARTS FOR CRT (*)		
LOC.	25" SAMSUNG	29" DEC
C402	1.6KV 9100p (M)	1.6KV 0.12u (M)
C404	1.6KV 6900p (M)	1.6KV 7200p (M)
C408	400V 0.43u (M)	400V 0.62u (M)
L401	TRL-330	TRL-140D
R550	1.8K (1K)	1.5K (1K)
R551	1.8K (1K)	1.5K (1K)
R556	5.1K	4.7K
R608	1K	910
R920	1W 2.4 (F)	1W 5.6 (F)
V901	AS9KPR84X...	AB6KT8259X...
COIL DE.	DC-2552	DC-2952

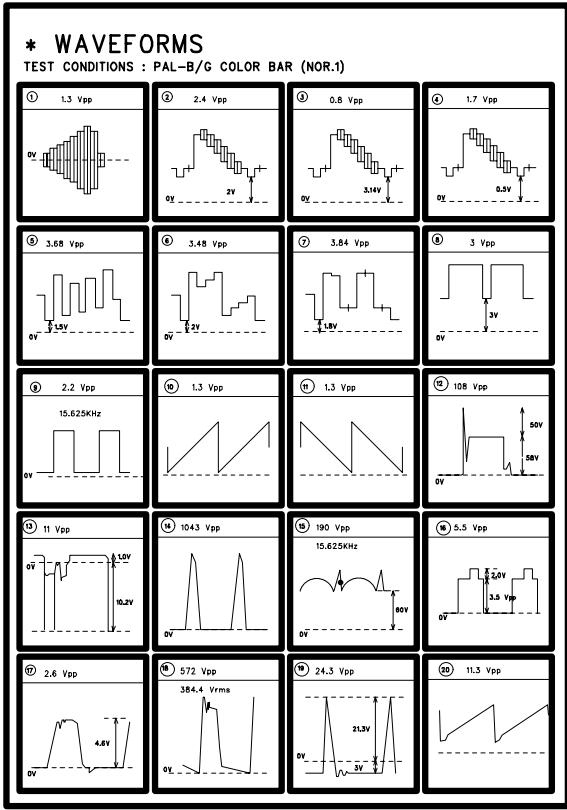

10. Circuit Diagram
10-2 New Main PCB & Control PCB

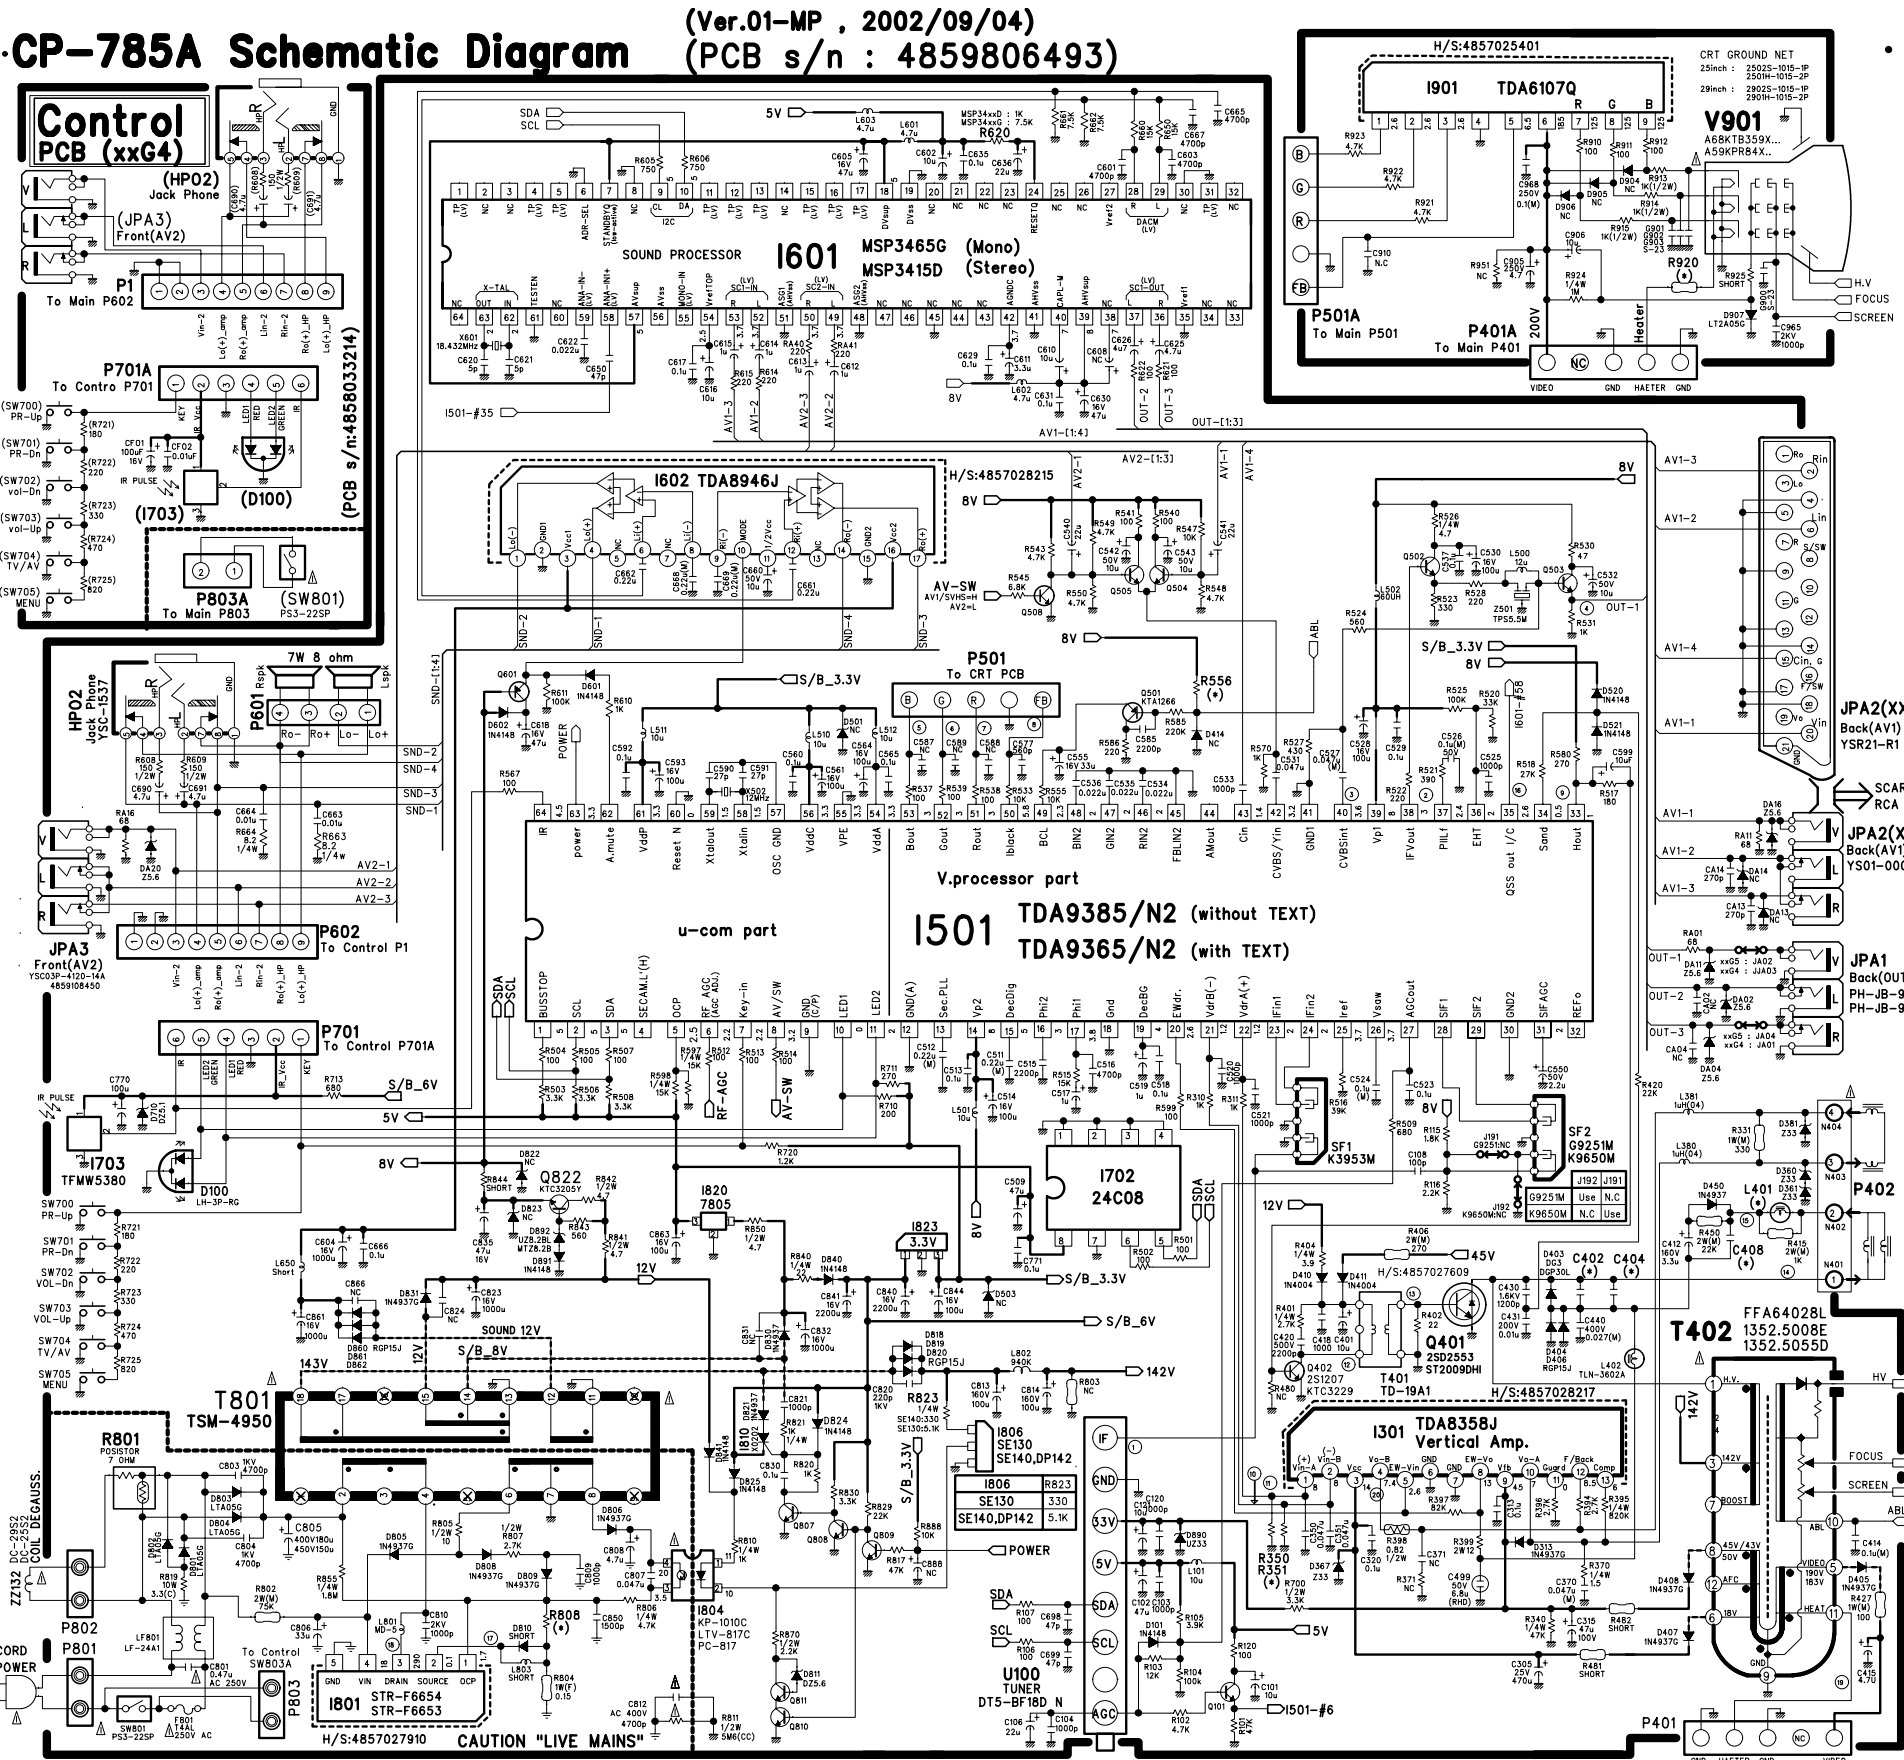

PRODUCT SAFETY NOTE :
THE COMPONENTS MARKED WITH ARE IMPORTANT FOR MAINTAINING THE SAFETY OF THE SET AND SHOULD BE REPLACED ONLY WITH TYPES IDENTICAL TO THOSE IN THE ORIGINAL OR SPECIFIED ONE IN THE PART LIST. DON'T DEGRADE THE SAFETY OF THE SET THROUGH IMPROPER SERVICING.

NOTE:
1. RESISTANCE IS SHOWN IN OHM. K=1000, M=1000000
2. UNLESS OTHERWISE NOTED IN SCHEMATIC ALL CAPACITOR VALUES ARE EXPRESSED IN uF
3. VOLTAGES READ WITH "VTVM" FROM POINT INDICATED TO CHASSIS GROUND USING A COLOR BAR SIGNAL WITH ALL CONTROLS AT NORMAL LINE 230V AC VOLTAGE READINGS SHOWN ARE NORMAL VALUES AND MAY VARY +20% EXCEPT H.V.
4. THIS CIRCUIT DIAGRAM IS A STANDARD ONE CIRCUIT PRINTED MAY BE SUBJECT TO CHANGE FOR PRODUCT IMPROVEMENT WITHOUT PRIOR NOTICE


WARNING:
BEFORE SERVICING THE CHASSIS, READ "X-RAY RADIATION", "SAFETY PRECAUTION", AND "PRODUCT SAFETY NOTICE" IN SERVICE MANUAL

CAUTION TO SERVICE TECHNICIANS:
BEFORE RETURNING THE RECEIVER TO CUSTOMER, LEAKAGE CURRENT OR RESISTANCE MEASUREMENTS SHOULD BE PERFORMED TO DETERMINE THAT EXPOSED PARTS ARE PROPERLY INSULATED FROM THE SUPPLY CIRCUIT.

RESISTOR	CAPACITOR	COIL
CARBON FILM	ELECTRO	PEAKING
R M-OXIDE	CERAMIC	CHOKE
CARBON COMP	CERAMIC CH	BEAD
FUSIBLE	ELECTRO NONPOLAR	
CEMENT	MYLAR	

THE DIFFERENT PARTS for CRT(*)

	29inch OEC (FS-68XXX) (29G4,29G5)	25inch SDI (FS-59XXX) (25G4,25G5)	REMARK
C402	1.6KV BUP 0.012MF J	1.6KV BUP 0.010PF J	RETRACE CAP.
C404	1.6KV BUP 7200PF J	1.6KV BUP 6900PF J	RETRACE CAP.
C408	400V PU 0.62MF J	400V PU 0.43MF J	S-CAP.
L401	TRL-140D	TRL-330	H-LINERITY COIL
R350	1/4 1.50K OHM F	1/4 1.80K OHM F	VERTICAL DEF.
R351	1/4 1.50K OHM F	1/4 1.80K OHM F	VERTICAL DEF.
R556	1/6 4.7K OHM J	1/6 5.1K OHM J	Beam Current
R808	1/4 910 OHM J	1/6 1K OHM J	OCF Resistance
R920	1W 5.60HM J	1W 2.4 OHM J	HEATER Resistance
V901 (CRT)	A88KT359X001(B) A88KT359X010(B)	A59KPR84X01 A59KPR84X02	DY connector : 4 pin Type DY connector : 6 pin Type
ZZ131 (CRT GND)	2802S-101S-IP 2801H-101S-2P	2502S-101S-IP 2501H-101S-2P	±0.02S-101S-IP : 1pin Type ±0.01H-101S-2P : 2pin Type
ZZ132 (Circ D/G)	DC-2952	DC-2552	

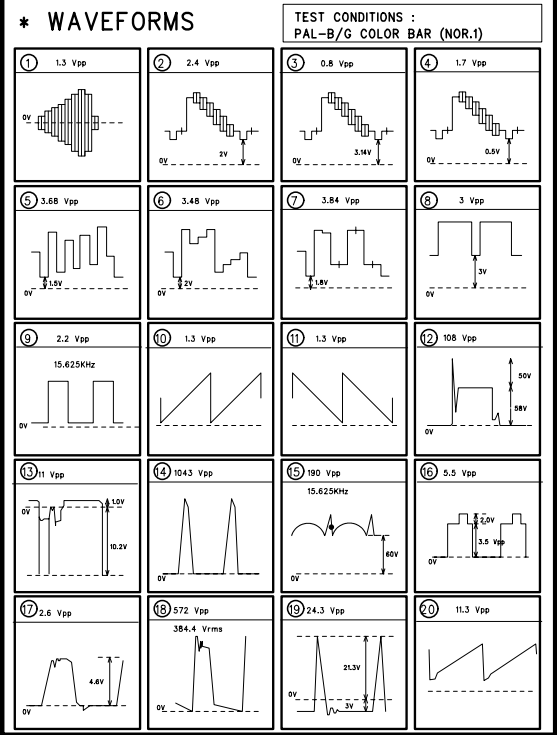

NEC

NEC Corporation

7-1, SHIBA 5-CHOME MINATO-KU,
TOKYO 108-8001, JAPAN