

PARTS LIST

CAUTION

- The parts identified by the Δ symbol are important for the safety . Whenever replacing these parts, be sure to use specified ones to secure the safety.
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied.
- P.W. BOARD Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied.

ABBREVIATIONS OF RESISTORS, CAPACITORS AND TOLERANCES

RESISTORS		CAPACITORS	
CR	Carbon Resistor	C CAP.	Ceramic Capacitor
FR	Fusible Resistor	E CAP.	Electrolytic Capacitor
PR	Plate Resistor	M CAP.	Mylar Capacitor
VR	Variable Resistor	CH CAP.	Chip Capacitor
HV R	High Voltage Resistor	HV CAP.	High Voltage Capacitor
MF R	Metal Film Resistor	MF CAP.	Metalized Film Capacitor
MG R	Metal Glazed Resistor	MM CAP.	Metalized Mylar Capacitor
MP R	Metal Plate Resistor	MP CAP.	Metalized Polystyrol Capacitor
OM R	Metal Oxide Film Resistor	PP CAP.	Polypropylene Capacitor
CMF R	Coating Metal Film Resistor	PS CAP.	Polystyrol Capacitor
UNF R	Non-Flammable Resistor	TF CAP.	Thin Film Capacitor
CH V R	Chip Variable Resistor	MPP CAP.	Metalized Polypropylene Capacitor
CH MG R	Chip Metal Glazed Resistor	TAN. CAP.	Tantalum Capacitor
COMP. R	Composition Resistor	CH C CAP.	Chip Ceramic Capacitor
LPTC R	Linear Positive Temperature Coefficient Resistor	BP E CAP.	Bi-Polar Electrolytic Capacitor
		CH AL E CAP.	Chip Aluminum Electrolytic Capacitor
		CH AL BP CAP.	Chip Aluminum Bi-Polar Capacitor
		CH TAN. E CAP.	Chip Tantalum Electrolytic Capacitor
		CH AL BP E CAP.	Chip Tantalum Bi-Polar Electrolytic Capacitor

RESISTORS									
F	G	J	K	M	N	R	H	Z	P
±1%	±2%	±5%	±10%	±20%	±30%	+30% -10%	+50% -10%	+80% -20%	+100% -0%

CONTENTS

USING P.W. BOARD & REMOTE CONTROL UNIT	3-2
EXPLODED VIEW PARTS LIST	3-3
EXPLODED VIEW	3-5
PRINTED WIRING BOARD PARTS LIST [AV-48P575/H]	3-7
MAIN P.W. BOARD ASS'Y (SRP-1003A-M2)	3-7
DEF / CONVERGENCE OUT P.W. BOARD ASS'Y (SRP-2002A-M2)	3-11
R CRT SOCKET P.W. BOARD ASS'Y (SRP-3101A-M2)	3-14
G CRT SOCKET P.W. BOARD ASS'Y (SRP-3201A-M2)	3-14
B CRT SOCKET P.W. BOARD ASS'Y (SRP-3301A-M2)	3-14
VM P.W. BOARD ASS'Y (SRP-7201A-M2)	3-14
REMOCON SENSOR P.W. BOARD ASS'Y (SRP-8001A-M2)	3-15
POWER P.W. BOARD ASS'Y (SRP-9001A-M2)	3-15
FRONT CONTROL P.W. BOARD ASS'Y (SRP0L001A-M2)	3-16
DIGITAL INPUT MODULE P.W. BOARD ASS'Y (SRP-7803A-M2)	3-16
DIGITAL CONVERGENCE MODULE P.W. BOARD ASS'Y (SRP0K003A-M2)	3-16
MI-CON & DIST MODULE P.W. BOARD ASS'Y (SRP0D001A-M2)	3-16
PRINTED WIRING BOARD PARTS LIST [AV-56P575/H]	3-17
MAIN P.W. BOARD ASS'Y (SRP-1004A-M2)	3-17
DEF / CONVERGENCE OUT P.W. BOARD ASS'Y (SRP-2002A-M2)	3-21
R CRT SOCKET P.W. BOARD ASS'Y (SRP-3101A-M2)	3-21
G CRT SOCKET P.W. BOARD ASS'Y (SRP-3201A-M2)	3-21
B CRT SOCKET P.W. BOARD ASS'Y (SRP-3301A-M2)	3-21
VM P.W. BOARD ASS'Y (SRP-7201A-M2)	3-21
REMOCON SENSOR P.W. BOARD ASS'Y (SRP-8001A-M2)	3-21
POWER P.W. BOARD ASS'Y (SRP-9001A-M2)	3-21
FRONT CONTROL P.W. BOARD ASS'Y (SRP0L001A-M2)	3-21
DIGITAL INPUT MODULE P.W. BOARD ASS'Y (SRP-7804A-M2)	3-21
DIGITAL CONVERGENCE MODULE P.W. BOARD ASS'Y (SRP0K002A-M2)	3-21
MI-CON & DIST MODULE P.W. BOARD ASS'Y (SRP0D001A-M2)	3-21
PRINTED WIRING BOARD PARTS LIST [AV-56P585/H]	3-22
MAIN P.W. BOARD ASS'Y (SRP-1002A-M2)	3-22
DEF / CONVERGENCE OUT P.W. BOARD ASS'Y (SRP-2002A-M2)	3-26
R CRT SOCKET P.W. BOARD ASS'Y (SRP-3101A-M2)	3-26
G CRT SOCKET P.W. BOARD ASS'Y (SRP-3201A-M2)	3-26
B CRT SOCKET P.W. BOARD ASS'Y (SRP-3301A-M2)	3-26
VM P.W. BOARD ASS'Y (SRP-7201A-M2)	3-26
REMOCON SENSOR P.W. BOARD ASS'Y (SRP-8001A-M2)	3-26
POWER P.W. BOARD ASS'Y (SRP-9001A-M2)	3-26
FRONT CONTROL P.W. BOARD ASS'Y (SRP0L001A-M2)	3-26
DIGITAL INPUT MODULE P.W. BOARD ASS'Y (SRP-7802A-M2)	3-26
DIGITAL CONVERGENCE MODULE P.W. BOARD ASS'Y (SRP0K002A-M2)	3-26
MI-CON & DIST MODULE P.W. BOARD ASS'Y (SRP0D001A-M2)	3-26
REMOTE CONTROL UNIT PARTS LIST (RM-C1257G-1H)	3-27
PACKING	3-27
PACKING PARTS LIST	3-27

USING P.W. BOARD & REMOTE CONTROL UNIT


P.W.B ASS'Y	AV-48P575/H	AV-56P575/H	AV-56P585/H
MAIN P.W.B	SRP-1003A-M2	SRP-1004A-M2	SRP-1002A-M2
DEF / CONVERGENCE OUT P.W.B	SRP-2002A-M2	←	←
R CRT SOCKET P.W.B	SRP-3101A-M2	←	←
G CRT SOCKET P.W.B	SRP-3201A-M2	←	←
B CRT SOCKET P.W.B	SRP-3301A-M2	←	←
VM P.W.B	SRP-7201A-M2	←	←
REMOCON SENSOR P.W.B	SRP-8001A-M2	←	←
POWER P.W.B	SRP-9001A-M2	←	←
FRONT CONTROL P.W.B	SRP0L001A-M2	←	←
DIGITAL INPUT MODULE P.W.B	SRP-7803A-M2	SRP-7804A-M2	SRP-7802A-M2
DIGITAL CONVERGENCE MODULE P.W.B	SRP0K003A-M2	SRP0K002A-M2	←
MI-CON & DIST MODULE P.W.B	SRP0D001A-M2	←	←
REMOTE CONTROL UNIT	RM-C1257G-1H	←	←


EXPLODED VIEW PARTS LIST

△	Ref.No.	Part No.	Part Name	Description	Local
△	DY01	QQD0107-001	DEF YOKE	(x3)	
△	T502	QQH0179-001	FB TRANSF		
	1	LC32441-003A-A	48" GLASS MIRROR		AV-48P575/H
	1	LC32173-002A-A	56" GLASS MIRROR		AV-56P575/H,AV-56P585/H
△	2	LC11247-001D-A	BACK COVER		AV-48P575/H
△	2	LC11407-001D-A	BACK COVER		AV-56P575/H,AV-56P585/H
	3	QYSBSAG4018M	TAP SCREW	M4 x 18mm(x4)	
	4	QYSBSFG4016M	TAP SCREW	4.0mm x 16mm(x13)	
	5	LC21316-001A-A	MIRROR HOLDER TOP		
	6	LC21311-001B-A	MIRROR HOLDER LEFT		
	7	LC21311-002B-A	MIRROR HOLDER RIGHT		
	8	LC21317-001B-A	MIRROR HOLDER BOTTOM		
	9	QYSBSFG4016M	TAP SCREW	4.0mm x 16mm(x10)	
	10	QYSBSAG4018M	TAP SCREW	M4 x 18mm(x2)	
△	11	LC11800-001B-A	CENTER PANEL		AV-48P575/H,AV-56P575/H
△	11	LC11800-002B-A	CENTER PANEL		AV-56P585/H
	12	QYSBSAG4018M	TAP SCREW	M4 x 18mm(x4)	
△	13	LC11794-001C-A	SPEAKER GRILL LEFT		AV-48P575/H
△	13	LC11863-001C-A	SPEAKER GRILL LEFT		AV-56P575/H
△	13	LC11799-004C-A	SPEAKER GRILL LEFT		AV-56P585/H
△	14	LC11866-001C-A	SPEAKER GRILL RIGHT		AV-48P575/H
△	14	LC11818-001C-A	SPEAKER GRILL RIGHT		AV-56P575/H
△	14	LC11799-003C-A	CLOTH PANEL RIGHT		AV-56P585/H
	15	QYSBSAG4018M	TAP SCREW	M4 x 18mm(x5)	
△	16	LC21576-001B-A	KNOB		AV-48P575/H,AV-56P575/H
△	16	LC21576-002C-A	KNOB		AV-56P585/H
△	17	LC32555-001C-A	LED LENS		
	18	QYSBSF3012M	TAP SCREW	3.0mm x 12mm(x2)	
	19	LC32412-001A-C	JVC MARK		
	20	QYNSS3000P	PUSH NUT	M3	
△	21	LC21490-001A-A	SHADING BOARD		
△	22	QAS0248-001	SPEAKER	SP01/SP02(x2)	
	23	QYSBSA4012M	TAP SCREW	M4 x 12mm(x8)	
	24	LC32645-001A-A	BC FIT	(x2)	
	25	QYSPSPD4020Z	SCREW	M4 x 20mm(x2)	
	26	QYSBSA4012M	TAP SCREW	M4 x 12mm(x2)	
	27	QYSBSG4012Z	TAP SCREW	M4 x 12mm(x2)	
△	28	LC21491-001A-A	BACK BOARD		
	29	QYSBSFG4016M	TAP SCREW	4.0mm x 16mm(x7)	
	30	QYSBSAG4018M	TAP SCREW	M4 x 18mm(x4)	
	31	QYSBSFG4020M	TAP SCREW	M4 x 20mm(x4)	
△	32	LC31139-001A-A	RATING LABEL		
	33	48SC-002A-M2	SCREEN ASSY	PROTECTOR / FRESNEL LENS / LENTICULAR LENS	AV-48P575/H
△	33	56SC-003A-M2	SCREEN ASSY	PROTECTOR / FRESNEL LENS / LENTICULAR LENS	AV-56P575/H,AV-56P585/H
△	34	LC32721-001A-A	FRONT PANEL ASSY		AV-48P575/H
△	34	LC32722-001A-A	FRONT PANEL ASSY		AV-56P575/H
△	34	LC32722-002A-A	FRONT PANEL ASSY		AV-56P585/H
	35	LC32188-002A-A	SENSOR HOLDER	(x4)	
	36	LC32188-001C-A	SENSOR HOLDER	(x4)	
	37	QSD0008-001	PHOTO SENSOR	(x4)	
	38	QYSBSG4012Z	TAP SCREW	M4 x 12mm(x4)	
	39	LC31735-001A-A	LENS D250	(x3)	AV-48P575/H
	39	LC31736-001A-A	LENS D260	(x3)	AV-56P575/H,AV-56P585/H
△	40	R-CRT575SAM2	R CRT SA		
△	41	G-CRT575SAM2	G CRT SA		
△	42	B-CRT575SAM2	B CRT SA		
	43	QAL0477-001	2/4 POLE MAGNET	(x3)	
△	44	LC21488-002A-A	UNIT BKT RIGHT		
△	45	LC21488-001A-A	UNIT BKT LEFT		
△	46	QAE0007-001	HV DIVIDER		
△	47	QAE0008-001	FOCUS PACK		
	48	QYSBSGG3008Z	TAP SCREW	3mm x 8mm	
	49	CM22765-001-A	COOLANT PAN		
	50	QYSBSG4012Z	TAP SCREW	M4 x 12mm(x2)	
△	51	LC11789-001B-A	CHASSIS BASE		
△	52	LC11791-001A-A	AV BOARD		
	53	QYSBSF3012Z	TAP SCREW	3.0mm x 12mm(x4)	
	54	CM32201-00A-H	ASSY SCREW		
△	55	QMPD200-200-JC	POWER CORD(US/CA)	2m BLACK	
△	56	LC20106-001D-A	POWER CORD CLAMP		
△	57	GQ30034-001B-A	WARNING LABEL		
△	58	QQR0491-001	FERRITE CORE	(GRAY)(x2)	

△	Ref.No.	Part No.	Part Name	Description	Local
△	100	LC21639-001B-A	CONTROL ASSY	Inc.No.101-106	AV-48P575/H,AV-56P575/H
△	100	LC21639-002B-A	CONTROL ASSY	Inc.No.101-106	AV-56P585/H
△	101	LC11788-001C-A	CONTROL BASE		AV-48P575/H,AV-56P575/H
△	101	LC11788-002C-A	CONTROL BASE		AV-56P585/H
△	102	LC11786-001C-A	DOOR		AV-48P575/H,AV-56P575/H
△	102	LC11786-002C-A	DOOR		AV-56P585/H
	103	LC21486-001B-A	OPERATION SHEET		
	104	PU60109	CATCHER		
	105	QZW0055-003	DAMPER		
	106	LC41776-001A-A	SPRING		AV-48P575/H,AV-56P575/H
△	200	LC11796-001A-A	BODY	Inc.No.201	AV-48P575/H
△	200	LC11806-001A-A	BODY	Inc.No.201	AV-56P575/H,AV-56P585/H
	201	CM36396-00B-A	CASTER	(x4)	
△	300	SRP0L001A-M2	FRONT CONTROL PWB		
△	301	SRP-1003A-M2	MAIN PWB		AV-48P575/H
△	301	SRP-1004A-M2	MAIN PWB		AV-56P575/H
△	301	SRP-1002A-M2	MAIN PWB		AV-56P585/H
△	302	SRP-9001A-M2	POWER PWB		
△	303	SRP-2002A-M2	DEF / CONVERGENCE OUT PWB		
△	304	SRP0K003A-M2	DIGITAL CONVERGENCE MODULE PWB		AV-48P575/H
△	304	SRP0K002A-M2	DIGITAL CONVERGENCE MODULE PWB		AV-56P575/H,AV-56P585/H
△	305	SRP0D001A-M2	MI-COM & DIST MODULE PWB		
△	306	SRP-8001A-M2	REMOCON SENSOR PWB		
△	307	SRP-7803A-M2	DIGITAL INPUT MODULE PWB		AV-48P575/H
△	307	SRP-7804A-M2	DIGITAL INPUT MODULE PWB		AV-56P575/H
△	307	SRP-7802A-M2	DIGITAL INPUT MODULE PWB		AV-56P585/H
△	308	SRP-3101A-M2	R CRT SOCKET PWB		
△	309	SRP-3201A-M2	G CRT SOCKET PWB		
△	310	SRP-3301A-M2	B CRT SOCKET PWB		
△	311	SRP-7201A-M2	VM PWB		

EXPLODED VIEW

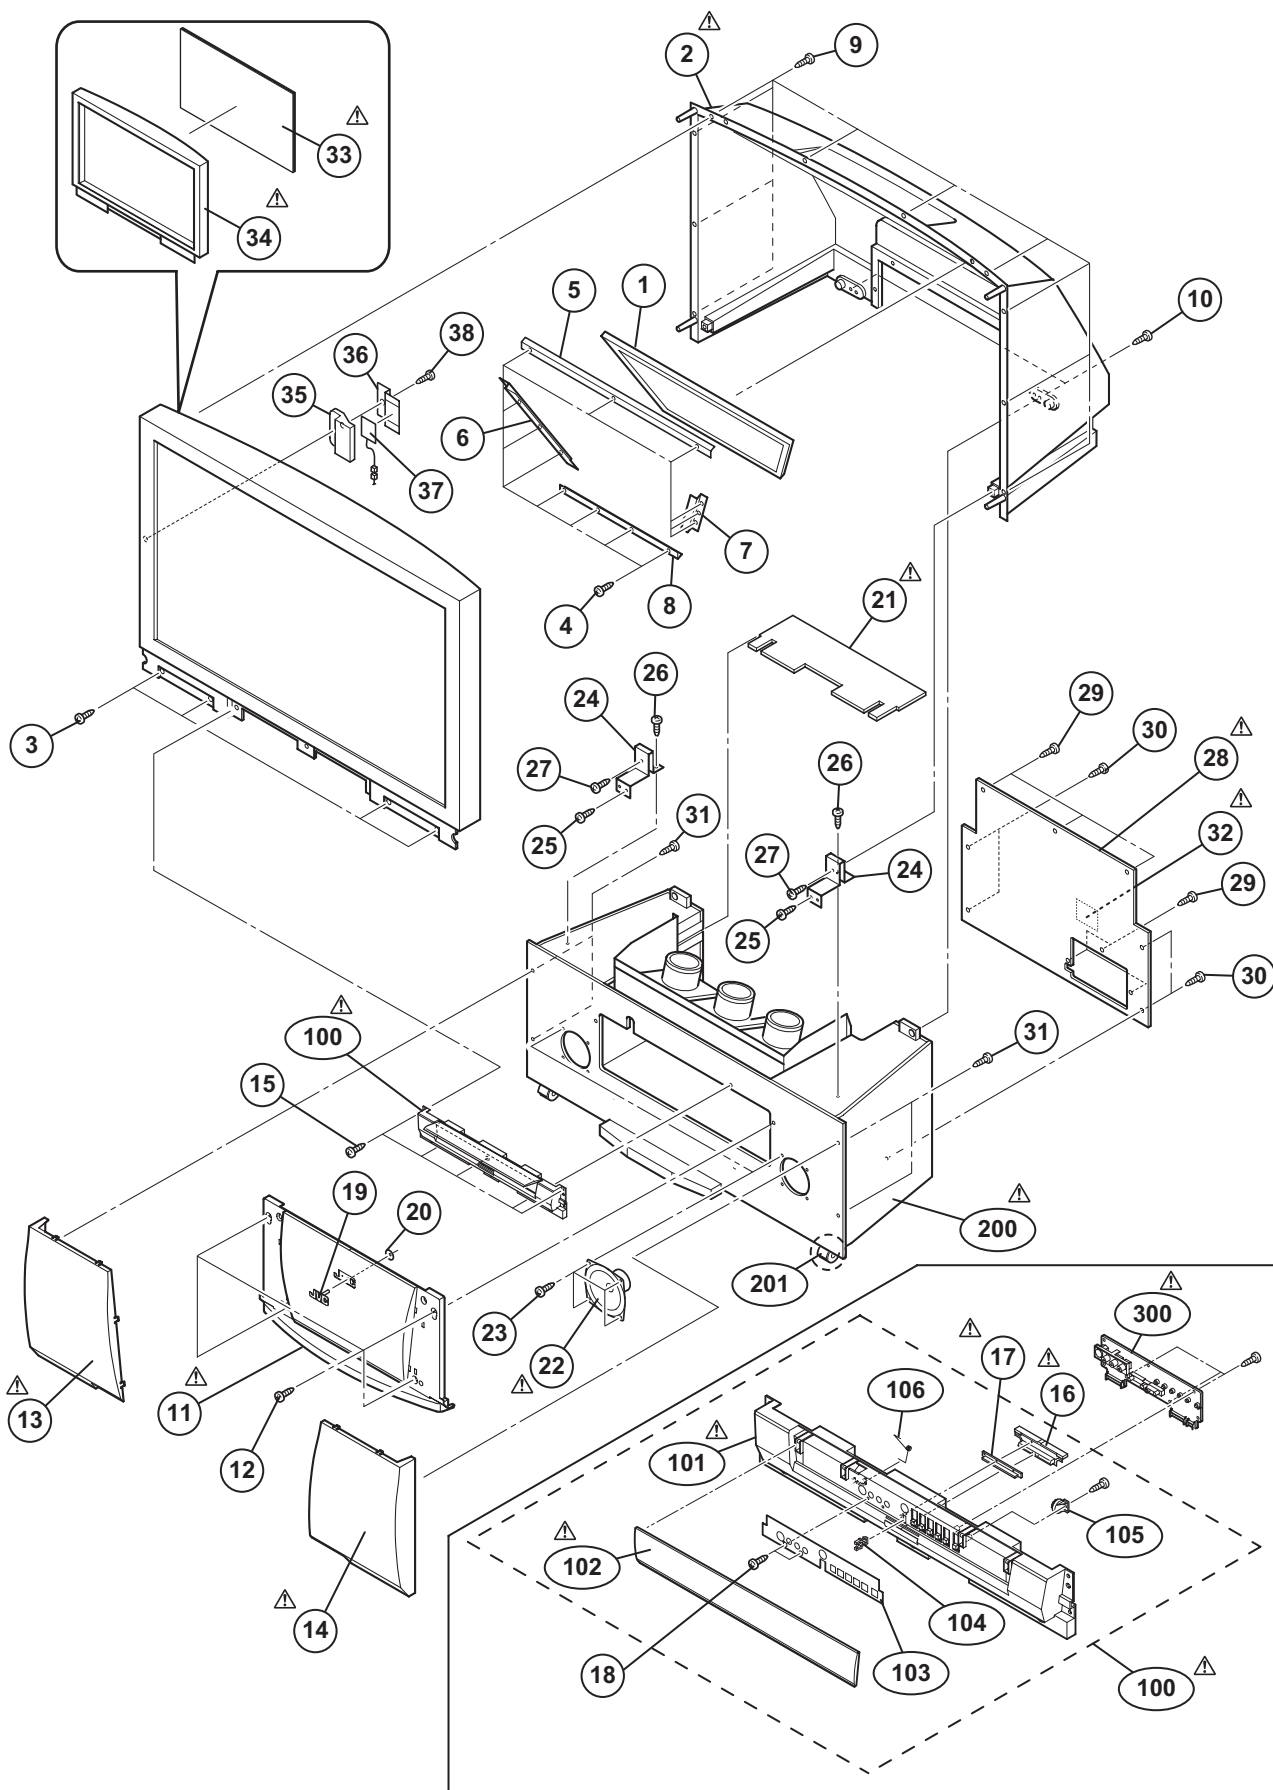

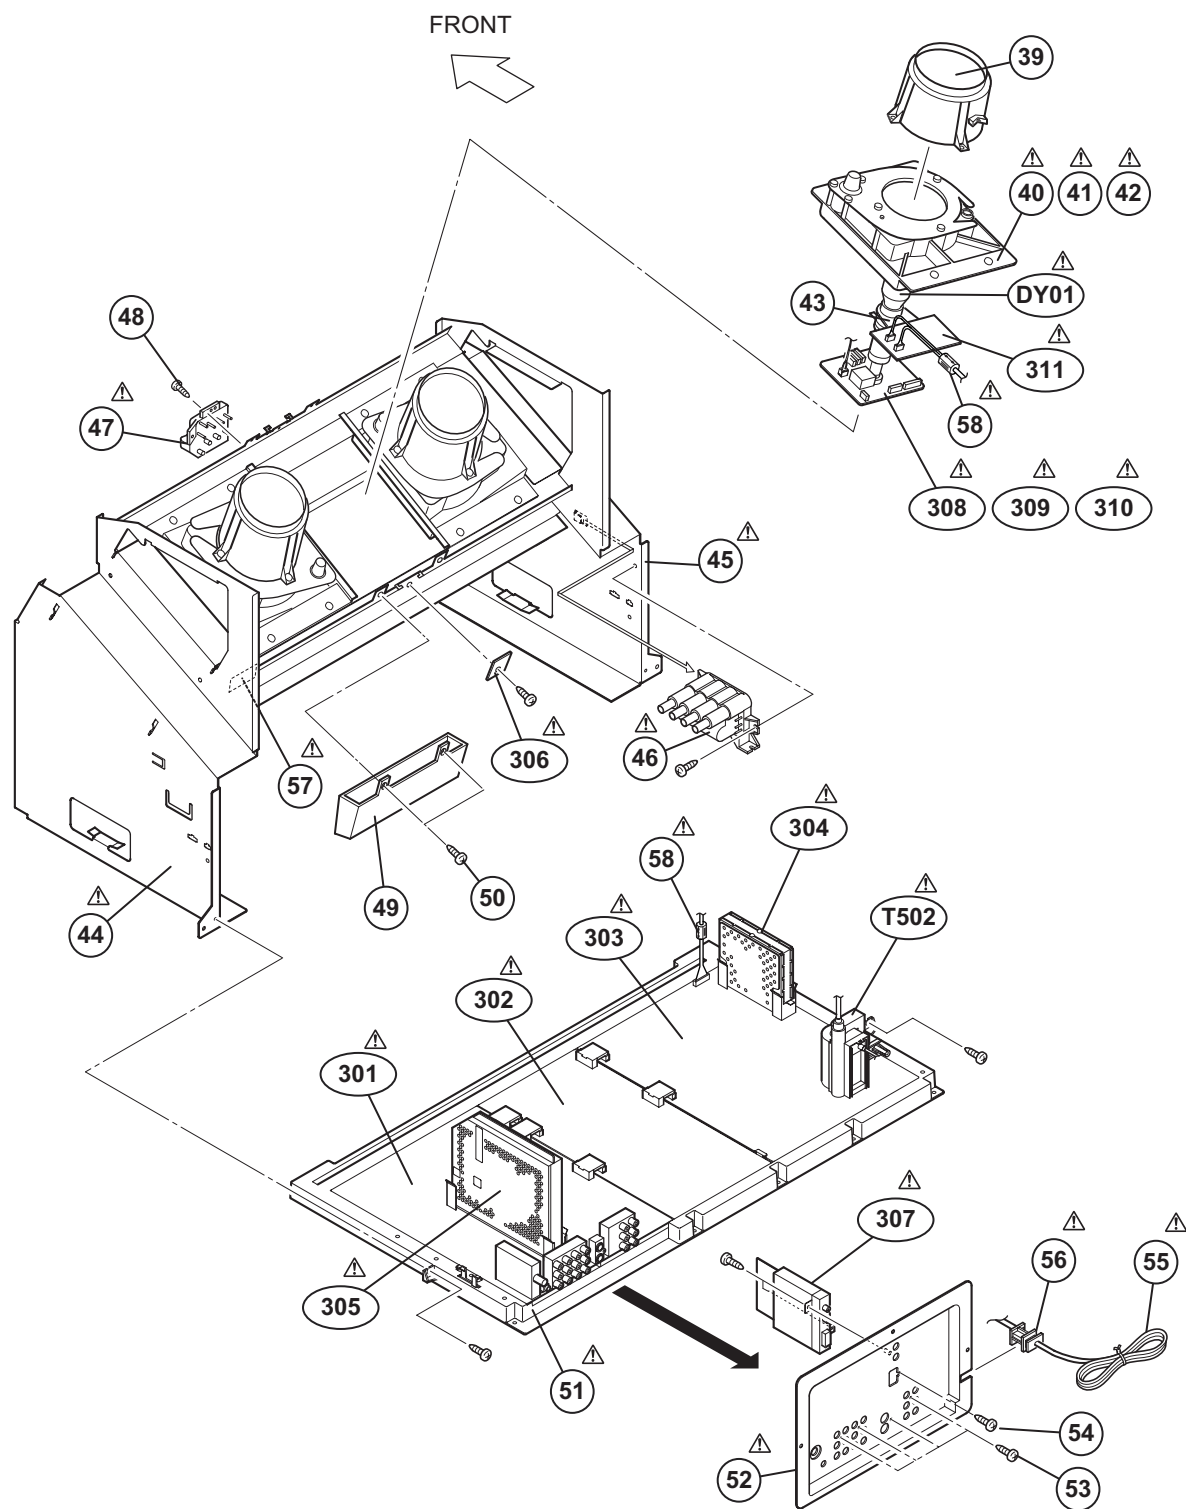

PRINTED WIRING BOARD PARTS LIST [AV-48P575/H]

MAIN P.W. BOARD ASS'Y (SRP-1003A-M2)

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
IC1101	L7805CP	IC		D1401	MA111-X	SI DIODE	
IC1140	CXA2205Q-X	IC		D1402	UDZS5.1B-X	Z DIODE	
IC1211	TA1318N	IC		D1403	MA111-X	SI DIODE	
IC1212	SN74AHC2G08T-X	IC		D1513	MA111-X	SI DIODE	
IC1301	AN15852A	IC		D1596	MA8100/M/-X	Z DIODE	
IC1501	CXA2069Q	IC		D1667	MA111-X	SI DIODE	
IC1502	M62320FP-X	IC		D1668	MA111-X	SI DIODE	
IC1511	PQ033RD01SZ	IC		D1669	MA111-X	SI DIODE	
IC1641	NJM2150AM-X	IC		D1702	MA111-X	SI DIODE	
IC1661	AN5277	IC		D1703	MA111-X	SI DIODE	
IC1703	AT24C128-56P585	IC	(SERVICE)	D1704	MA8100/M/-X	Z DIODE	
IC1802	BA033T	REGULATOR IC		D1705	MA8100/M/-X	Z DIODE	
IC1941	PQ1CG21H2FZ	IC		D1712	MA111-X	SI DIODE	
IC1942	SI-8050JD-W	IC		D1802	MA111-X	SI DIODE	
IC1943	PQ1CY1032Z-W	IC		D1895	MA8082/M/-X	Z DIODE	
IC1981	PQ070XZ01Z-X	IC		D1896	MA8082/M/-X	Z DIODE	
IC1991	PQ12RD11	IC		D1897	MA8051/M/-X	Z DIODE	
IC1993	MM1565AF-X	IC		D1898	MA8051/M/-X	Z DIODE	
IC3001	MN82832	IC		D1947	EC31QS04-X	SB DIODE	
IC3002	R1170H331B-X	IC		D1948	EC31QS04-X	SB DIODE	
IC6001	NJM2701M-X	IC		D1949	EC31QS04-X	SB DIODE	
Q0701	2SK2090-X	MOS FET		D1962	MA3030/H/-X	Z DIODE	
Q0702	2SK2090-X	MOS FET		D1964	MA111-X	SI DIODE	
Q1101	2SA1530A/QR/-X	TRANSISTOR		D1965	MA111-X	SI DIODE	
Q1102	2SC3928A/QR/-X	TRANSISTOR		D1967	PTZ6.8B-X	Z DIODE	
Q1232	2SA1530A/QR/-X	TRANSISTOR		D1968	PTZ3.9B-X	Z DIODE	
Q1252	2SA1530A/QR/-X	TRANSISTOR		D1969	PTZ11B-X	Z DIODE	
Q1253	2SC3928A/QR/-X	TRANSISTOR		D1981	MA111-X	SI DIODE	
Q1254	2SA1530A/QR/-X	TRANSISTOR		D1991	MA111-X	SI DIODE	
Q1255	2SC3928A/QR/-X	TRANSISTOR		D1993	MA111-X	SI DIODE	
Q1301	2SC3837K/NP/-X	TRANSISTOR		D2101	MA8100/M/-X	Z DIODE	
Q1302	2SC3837K/NP/-X	TRANSISTOR		D2121	MA8100/M/-X	Z DIODE	
Q1303	2SC3837K/NP/-X	TRANSISTOR		D2201	MA8100/M/-X	Z DIODE	
Q1401	2SC3928A/QR/-X	TRANSISTOR		D2204	MA8100/M/-X	Z DIODE	
Q1511	2SC3928A/QR/-X	TRANSISTOR		D2205	MA8100/M/-X	Z DIODE	
Q1531	2SC3928A/QR/-X	TRANSISTOR		D2206	MA8100/M/-X	Z DIODE	
Q1668	UN2213-X	DIGI TRANSISTOR		D2209	MA8100/M/-X	Z DIODE	
Q1669	2SC3928A/QR/-X	TRANSISTOR		D2210	MA8100/M/-X	Z DIODE	
Q1671	UN2213-X	DIGI TRANSISTOR		D2212	MA8100/M/-X	Z DIODE	
Q1672	2SC3928A/QR/-X	TRANSISTOR		D2213	MA8100/M/-X	Z DIODE	
Q1673	2SA1530A/QR/-X	TRANSISTOR		D2215	MA8100/M/-X	Z DIODE	
Q1674	2SC3928A/QR/-X	TRANSISTOR		D2216	MA8100/M/-X	Z DIODE	
Q1712	2SA1530A/QR/-X	TRANSISTOR		D2217	MA8100/M/-X	Z DIODE	
Q1713	2SC2785/JH/-T	SI TRANSISTOR		D2218	MA8100/M/-X	Z DIODE	
Q1714	2SA1530A/QR/-X	TRANSISTOR		D2219	MA8100/M/-X	Z DIODE	
Q1961	2SC3928A/QR/-X	TRANSISTOR		D2401	MA8100/M/-X	Z DIODE	
Q1962	2SC3928A/QR/-X	TRANSISTOR		D2402	MA8100/M/-X	Z DIODE	
Q1964	2SC3928A/QR/-X	TRANSISTOR		D2403	MA8100/M/-X	Z DIODE	
Q1965	UN2213-X	DIGI TRANSISTOR		D2404	MA8100/M/-X	Z DIODE	
Q1966	UN2213-X	DIGI TRANSISTOR		D2406	MA8100/M/-X	Z DIODE	
Q1967	UN2213-X	DIGI TRANSISTOR		D2421	MA8100/M/-X	Z DIODE	
Q1981	2SC4682-T	TRANSISTOR		D2422	MA8100/M/-X	Z DIODE	
Q1984	2SC4682-T	TRANSISTOR		C1101	QETN1CM-477Z	E CAPACITOR	470uF 16V M
Q3001	2SC3928A/QR/-X	TRANSISTOR		C1102	QETN1CM-107Z	E CAPACITOR	100uF 16V M
Q3002	2SC3928A/QR/-X	TRANSISTOR		C1103	QETN1HM-106Z	E CAPACITOR	10uF 50V M
Q3003	2SA1530A/QR/-X	TRANSISTOR		C1111	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
Q3004	2SC3928A/QR/-X	TRANSISTOR		C1140	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
Q3005	2SC3928A/QR/-X	TRANSISTOR		C1141	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
Q3006	2SA1530A/QR/-X	TRANSISTOR		C1144	QETN1HM-106Z	E CAPACITOR	10uF 50V M
Q3007	2SA1530A/QR/-X	TRANSISTOR		C1145	NCB31HK-223X	C CAPACITOR	0.022uF 50V K
Q3501	2SA1530A/QR/-X	TRANSISTOR		C1146	NCB31HK-472X	C CAPACITOR	4700pF 50V K
Q3502	2SC3928A/QR/-X	TRANSISTOR		C1147	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
Q3505	2SA1530A/QR/-X	TRANSISTOR		C1148	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
Q3506	2SC3928A/QR/-X	TRANSISTOR		C1149	NCB31HK-472X	C CAPACITOR	4700pF 50V K
Q3509	2SA1530A/QR/-X	TRANSISTOR		C1150	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
Q3510	2SC3928A/QR/-X	TRANSISTOR		C1151	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
Q6001	2SC3928A/QR/-X	TRANSISTOR		C1152	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
Q6002	2SC3928A/QR/-X	TRANSISTOR		C1153	NCB31HK-562X	C CAPACITOR	5600pF 50V K
D1093	MA8082/M/-X	Z DIODE		C1154	NCB31HK-123X	C CAPACITOR	0.012uF 50V K
D1140	MA8100/M/-X	Z DIODE		C1155	QETN1HM-105Z	E CAPACITOR	1uF 50V M
D1141	MA8100/M/-X	Z DIODE		C1156	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
D1145	MA8082/M/-X	Z DIODE		C1157	QETN1HM-106Z	E CAPACITOR	10uF 50V M
D1146	MA8082/M/-X	Z DIODE		C1158	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
D1251	MA8100/M/-X	Z DIODE		C1159	QETN1CM-107Z	E CAPACITOR	100uF 16V M
D1252	MA8100/M/-X	Z DIODE		C1160	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
D1253	MA111-X	SI DIODE		C1161	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
D1301	MA8100/M/-X	Z DIODE		C1162	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
D1302	MA8100/M/-X	Z DIODE		C1163	NCB31HK-272X	C CAPACITOR	2700pF 50V K
D1305	MA8100/M/-X	Z DIODE		C1164	NCB31HK-473X	C CAPACITOR	0.047uF 50V K
D1306	MA8100/M/-X	Z DIODE		C1165	QETN1HM-335Z	E CAPACITOR	3.3uF 50V M
				C1166	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
				C1167	QETN1HM-106Z	E CAPACITOR	10uF 50V M
				C1168	QETN1HM-105Z	E CAPACITOR	1uF 50V M

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
C1169	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	C1652	NCB31CK-153X	C CAPACITOR	0.015uF 16V K
C1170	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	C1653	NCB31CK-473X	C CAPACITOR	0.047uF 16V K
C1171	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C1667	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1172	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C1668	NDC31HJ-101X	C CAPACITOR	100pF 50V J
C1213	QETN1CM-107Z	E CAPACITOR	100uF 16V M	C1669	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1214	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	C1670	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1215	QFLC1HJ-103Z	M CAPACITOR	0.01uF 50V J	C1671	NDC31HJ-101X	C CAPACITOR	100pF 50V J
C1216	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	C1672	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1218	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1673	QETN1HM-477Z	E CAPACITOR	470uF 50V M
C1219	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	C1674	QETM1HM-108	E CAPACITOR	1000uF 50V M
C1233	NDC31HJ-180X	C CAPACITOR	18pF 50V J	C1675	QFV21HJ-124Z	MF CAPACITOR	0.12uF 50V J
C1257	QETN1HM-105Z	E CAPACITOR	1uF 50V M	C1676	QFV21HJ-124Z	MF CAPACITOR	0.12uF 50V J
C1258	QETN1HM-105Z	E CAPACITOR	1uF 50V M	C1677	QETN1EM-108Z	E CAPACITOR	1000uF 25V M
C1301	QETN1CM-107Z	E CAPACITOR	100uF 16V M	C1678	QETN1EM-108Z	E CAPACITOR	1000uF 25V M
C1302	QETN1CM-107Z	E CAPACITOR	100uF 16V M	C1679	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C1303	QETN1CM-107Z	E CAPACITOR	100uF 16V M	C1680	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C1304	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C1696	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1305	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C1697	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C1306	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C1702	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1307	QETN1CM-106Z	E CAPACITOR	10uF 16V M	C1712	QETN1AM-227Z	E CAPACITOR	220uF 10V M
C1308	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1806	QETN1VM-476Z	E CAPACITOR	47uF 35V M
C1309	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1807	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C1311	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1941	QETN1VM-477Z	E CAPACITOR	470uF 35V M
C1312	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1942	QETN1CM-108Z	E CAPACITOR	1000uF 16V M
C1313	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1943	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C1322	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1944	QETN1VM-477Z	E CAPACITOR	470uF 35V M
C1323	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1945	QEZ0256-128	E CAPACITOR	1200uF 10V M
C1324	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1946	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C1325	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1947	QETN1CM-477Z	E CAPACITOR	470uF 16V M
C1326	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C1948	QETN1CM-477Z	E CAPACITOR	470uF 16V M
C1327	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C1949	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M
C1328	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C1950	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M
C1329	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1951	QETN1VM-477Z	E CAPACITOR	470uF 35V M
C1331	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1952	QEZ0256-128	E CAPACITOR	1200uF 10V M
C1332	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1953	QETN0JM-228Z	E CAPACITOR	2200uF 6.3V M
C1333	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1955	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C1341	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1961	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C1342	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1981	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C1343	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1984	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M
C1351	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1985	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M
C1352	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1991	QETN1EM-107Z	E CAPACITOR	100uF 25V M
C1353	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1992	QETN1CM-477Z	E CAPACITOR	470uF 16V M
C1354	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1994	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1355	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1995	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1371	QETN1CM-336Z	E CAPACITOR	33uF 16V M	C1996	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1372	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C2102	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1381	QETN1CM-336Z	E CAPACITOR	33uF 16V M	C2103	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1382	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C2104	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1391	QETN1CM-336Z	E CAPACITOR	33uF 16V M	C2105	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1392	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C2106	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1403	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	C2123	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1404	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	C2124	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1405	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	C2126	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1406	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	C2127	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1409	QETN1HM-106Z	E CAPACITOR	10uF 50V M	C2128	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1410	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C2144	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C2145	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1412	QETN1CM-107Z	E CAPACITOR	100uF 16V M	C2146	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1415	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C2302	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1416	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C2303	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1417	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C2322	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1418	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C2323	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1421	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	C2341	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1423	QETN1HM-476Z	E CAPACITOR	47uF 50V M	C2342	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1442	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C2343	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1501	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C3001	QENC1AM-336Z	BP E CAPACITOR	33uF 10V M
C1502	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C3002	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C1510	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M	C3003	NDC31HJ-121X	C CAPACITOR	120pF 50V J
C1519	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C3004	NDC31HJ-150X	C CAPACITOR	15pF 50V J
C1531	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C3005	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z
C1532	QETN1HM-226Z	E CAPACITOR	22uF 50V M	C3006	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1539	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	C3007	NCB31AK-334X	C CAPACITOR	0.33uF 10V K
C1540	QETN1AM-107Z	E CAPACITOR	100uF 10V M	C3008	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C1553	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C3009	NDC31HJ-121X	C CAPACITOR	120pF 50V J
C1554	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C3010	NDC31HJ-150X	C CAPACITOR	15pF 50V J
C1555	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C3011	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z
C1556	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C3012	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1557	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C3013	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1579	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C3014	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C1641	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M	C3015	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1642	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	C3016	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1643	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	C3017	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C1645	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C3018	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1646	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C3019	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1647	QETN1HM-226Z	E CAPACITOR	22uF 50V M	C3020	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1648	QETN1HM-106Z	E CAPACITOR	10uF 50V M	C3021	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1651	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M	C3022	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
C3023	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z				
C3024	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R0705	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3025	QETN1CM-106Z	E CAPACITOR	10uF 16V M	R0706	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3026	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1097	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C3027	NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	R1104	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3028	NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	R1105	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3029	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1107	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
C3030	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1110	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3031	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1111	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J
C3032	NDC31HJ-560X	C CAPACITOR	56pF 50V J	R1112	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3033	NDC31HJ-330X	C CAPACITOR	33pF 50V J	R1140	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J
C3034	NDC31HJ-560X	C CAPACITOR	56pF 50V J	R1141	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3035	NDC31HJ-330X	C CAPACITOR	33pF 50V J	R1142	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3036	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1143	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J
C3037	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1144	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
C3038	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1145	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C3039	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1146	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
C3041	QETN1CM-106Z	E CAPACITOR	10uF 16V M	R1147	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J
C3042	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1149	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3044	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1151	NRSA63J-302X	MG RESISTOR	3kΩ 1/16W J
C3045	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1152	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
C3046	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1157	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3047	QETN1CM-106Z	E CAPACITOR	10uF 16V M	R1158	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3048	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1202	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3049	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1203	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3050	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1218	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J
C3051	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1219	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C3052	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1220	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3053	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1221	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3054	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1226	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3055	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1228	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C3056	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1229	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3057	QETN1CM-106Z	E CAPACITOR	10uF 16V M	R1230	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3058	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1231	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3059	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1232	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C3060	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1234	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C3061	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1236	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C3062	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1240	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3063	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1261	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C3064	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1262	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C3065	QETN1CM-106Z	E CAPACITOR	10uF 16V M	R1265	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3066	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1266	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3067	QETN1CM-476Z	E CAPACITOR	47uF 16V M	R1267	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
C3068	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R1268	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3069	QETN1CM-476Z	E CAPACITOR	47uF 16V M	R1269	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3070	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R1272	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C3071	QETN1CM-476Z	E CAPACITOR	47uF 16V M	R1282	QRE141J-221Y	C RESISTOR	220Ω 1/4W J
C3072	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1283	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
C3077	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	R1284	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3078	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1285	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
C3079	NDC31HJ-470X	C CAPACITOR	47pF 50V J	R1286	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3080	QBTC1CK-106Z	TA E CAPACITOR	10uF 16V K	R1287	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
C3082	NDC31HJ-151X	C CAPACITOR	150pF 50V J	R1301	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3086	NCB31HK-152X	C CAPACITOR	1500pF 50V K	R1302	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3088	NDC31HJ-100X	C CAPACITOR	10pF 50V J	R1337	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
C3089	NDC31HJ-100X	C CAPACITOR	10pF 50V J	R1347	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
C3090	NDC31HJ-100X	C CAPACITOR	10pF 50V J	R1372	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3099	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1374	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C3100	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1375	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C3501	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1378	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3502	NDC31HJ-101X	C CAPACITOR	100pF 50V J	R1382	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3503	NDC31HJ-121X	C CAPACITOR	120pF 50V J	R1384	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C3504	NDC31HJ-150X	C CAPACITOR	15pF 50V J	R1385	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C3506	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	R1392	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3507	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1394	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C3508	NDC31HJ-101X	C CAPACITOR	100pF 50V J	R1395	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C3509	NDC31HJ-121X	C CAPACITOR	120pF 50V J	R1401	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3510	NDC31HJ-150X	C CAPACITOR	15pF 50V J	R1402	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3512	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	R1421	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J
C3513	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1422	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3514	NDC31HJ-101X	C CAPACITOR	100pF 50V J	R1423	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3515	NDC31HJ-121X	C CAPACITOR	120pF 50V J	R1501	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
C3516	NDC31HJ-150X	C CAPACITOR	15pF 50V J	R1502	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
C3518	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	R1505	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C3519	QENC1CM-336Z	BP E CAPACITOR	33uF 16V M	R1511	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3520	QENC1CM-336Z	BP E CAPACITOR	33uF 16V M	R1513	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3521	QENC1CM-336Z	BP E CAPACITOR	33uF 16V M	R1514	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C6001	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M	R1515	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C6002	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M	R1516	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C6003	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1517	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C6004	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1518	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C6005	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1519	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C6006	NCB31CK-273X	C CAPACITOR	0.027uF 16V K	R1520	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C6007	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1521	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C6008	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1522	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C6009	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R1523	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
C6010	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1524	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
R1525	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R1971	QRT039J-R68	MF RESISTOR	0.68Ω 3W J
R1526	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R1975	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1527	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R1978	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1528	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	△R1981	QRK126J-181X	UNF C RESISTOR	180Ω 1/2W J
R1529	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R1982	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D
R1530	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R1983	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D
R1533	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R1984	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J
R1534	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R1985	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R1535	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	△R1986	QRK126J-331X	UNF C RESISTOR	330Ω 1/2W J
R1536	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R1991	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R1537	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R1992	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R1538	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R2102	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1539	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R2103	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1560	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R2104	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1562	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R2105	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1571	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R2106	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1577	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R2122	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1578	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R2123	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1579	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R2125	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1611	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R2126	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1612	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R2127	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1613	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R2144	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1614	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	R2145	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1615	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R2146	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1616	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	R2305	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1641	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R2308	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1642	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R2325	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1643	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R2328	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1649	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R3001	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R1651	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3002	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R1652	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R3003	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1653	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R3004	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R1658	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R3005	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J
R1659	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R3006	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R1665	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R3007	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1666	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R3009	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D
R1667	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R3010	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R1668	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R3012	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R1669	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R3013	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R1670	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R3014	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1671	QRJ146J-2R2X	UNF C RESISTOR	2.2Ω 1/4W J	R3015	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R1672	QRJ146J-2R2X	UNF C RESISTOR	2.2Ω 1/4W J	R3016	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J
R1673	QRK126J-102X	UNF C RESISTOR	1kΩ 1/2W J	R3017	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R1674	QRK126J-102X	UNF C RESISTOR	1kΩ 1/2W J	R3018	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1680	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	R3020	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D
R1681	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R3021	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R1682	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R3023	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R1691	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	R3024	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R1694	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	R3025	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R1695	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R3026	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R1696	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R3027	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R1697	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R3028	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R1701	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R3029	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R1702	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R3030	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R1703	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R3039	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1712	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	R3040	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1713	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	R3042	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R1714	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	R3045	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1715	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R3047	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R1716	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3048	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R1718	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R3049	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R1895	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R3050	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
R1896	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R3051	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R1897	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R3052	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R1898	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R3053	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R1899	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R3054	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R1900	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R3055	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R1942	NRSA63D-122X	MG RESISTOR	1.2kΩ 1/16W D	R3058	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1943	NRSA63D-123X	MG RESISTOR	12kΩ 1/16W D	R3059	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
△R1944	QRK126J-220X	UNF C RESISTOR	22Ω 1/2W J	R3060	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R1945	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3065	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1946	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3066	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1949	NRSA63D-122X	MG RESISTOR	1.2kΩ 1/16W D	R3502	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1950	NRSA63D-822X	MG RESISTOR	8.2kΩ 1/16W D	R3503	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R1952	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	R3504	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J
R1953	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	R3505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R1957	NRSA63D-682X	MG RESISTOR	6.8kΩ 1/16W D	R3507	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1959	NRSA63D-182X	MG RESISTOR	1.8kΩ 1/16W D	R3508	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R1961	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3509	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R1962	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	R3511	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R1963	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	R3516	NRSA63J-680X	MG RESISTOR	68Ω 1/16W J
R1964	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R3518	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1965	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3519	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R1966	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	R3520	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J
R1967	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	R3521	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R1968	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3523	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1969	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3525	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J

△Ref No.	Part No.	Part Name	Description Local
R3532	NRSA63J-680X	MG RESISTOR	68Ω 1/16W J
R3534	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3535	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R3536	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J
R3537	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R3539	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3541	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R3548	NRSA63J-680X	MG RESISTOR	68Ω 1/16W J
R3549	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R3550	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R3551	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3552	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R3553	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R3554	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R3555	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R6001	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R6002	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R6003	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R6004	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R6006	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R6007	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R6008	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6009	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
RA3001	NRZ0040-103X	NET RESISTOR	10kΩ 1/16W J x4
RA3002	NRZ0040-103X	NET RESISTOR	10kΩ 1/16W J x4
RA3003	NRZ0040-103X	NET RESISTOR	10kΩ 1/16W J x4
RA3004	NRZ0040-103X	NET RESISTOR	10kΩ 1/16W J x4
L1211	QQL244K-100Z	PEAKING COIL	10uH K
L1401	QQL244K-100Z	PEAKING COIL	10uH K
L1402	QQL26AK-100Z	CHOKE COIL	10uH K
L1941	QQR1401-001	CHOKE COIL	
L1942	QQR1401-001	CHOKE COIL	
L1943	QQL26AK-330Z	CHOKE COIL	33uH K
L1944	QQL26AK-330Z	CHOKE COIL	33uH K
L1945	QQL26AK-220Z	CHOKE COIL	22uH K
L1946	QQL26AK-220Z	CHOKE COIL	22uH K
L1947	QQR1401-001	CHOKE COIL	
L1948	QQL26AK-100Z	CHOKE COIL	10uH K
L1950	QQL26AK-470Z	CHOKE COIL	47uH K
L1951	QQL26AK-470Z	CHOKE COIL	47uH K
L1952	QQL26AK-470Z	CHOKE COIL	47uH K
L1983	QRN143J-0R0X	C RESISTOR	0Ω 1/4W J
L3001	NQL092K-6R8X	COIL	6.8uH K
L3002	NQL092K-6R8X	COIL	6.8uH K
L3003	NQR0413-003X	FERRITE BEADS	
L3004	NQR0413-003X	FERRITE BEADS	
L3007	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
L3501	NQL092K-6R8X	COIL	6.8uH K
L3502	NQL092K-6R8X	COIL	6.8uH K
L3503	NQL092K-6R8X	COIL	6.8uH K
CN1001	QGB1506L1-16	CONNECTOR	B-B (1-16)
CN1002	QGB1506L1-16	CONNECTOR	B-B (1-16)
CN1003	QGB1506L1-16	CONNECTOR	B-B (1-16)
CN100Q	WJP0053-004A	E-SH C WIRE C-B	
CN10AU	WJP0052-002A	E-SH C WIRE C-B	
CN10DC	QJB003-043014	SIN ID C-B WIRE	
CN10SR	QJB003-052610	SIN ID C-B WIRE	
H1661	LC30145-003A	HEAT SINK/AL-F/	
H1802	CM42862-A0A	HEAT SINK ASSY	
J1091	QNS0242-001	3.5 JACK	AV COMPULINK
J2101	QNN0628-001	PIN JACK	V/L IN
J2102	QNN0629-001	PIN JACK	R IN/LR OUT/CENTER CH IN
J2111	QND0121-001	S JACK	S IN
J2121	QNN0638-001	PIN JACK	COMP-1/2 IN
K1943	QRN143J-0R0X	C RESISTOR	0Ω 1/4W J
K1944	QRN143J-0R0X	C RESISTOR	0Ω 1/4W J
LC1301	QQR1199-001	EMI FILTER	
LC1302	QQR1199-001	EMI FILTER	
LC1303	QQR1199-001	EMI FILTER	
LC2301	QQR1199-001	EMI FILTER	
LC2302	QQR1199-001	EMI FILTER	
LC2303	QQR1199-001	EMI FILTER	
LC2321	QQR1199-001	EMI FILTER	
LC2322	QQR1199-001	EMI FILTER	
LC2323	QQR1199-001	EMI FILTER	
LC2341	QQR1199-001	EMI FILTER	
LC2342	QQR1199-001	EMI FILTER	
LC2343	QQR1199-001	EMI FILTER	
LC3001	NQR0470-001X	EMI FILTER	22pF 50V +50%-20%
LC3002	NQR0470-001X	EMI FILTER	22pF 50V +50%-20%
LC3003	NQR0483-005X	EMI FILTER	
LC3004	NQR0470-003X	EMI FILTER	100pF 50V +50%-20%
LC3005	NQR0470-001X	EMI FILTER	22pF 50V +50%-20%
LC3006	NQR0470-003X	EMI FILTER	100pF 50V +50%-20%
LC3007	NQR0470-001X	EMI FILTER	22pF 50V +50%-20%

△Ref No.	Part No.	Part Name	Description Local
LC3008	NQR0470-001X	EMI FILTER	22pF 50V +50%-20%
LC3501	NQR0470-003X	EMI FILTER	100pF 50V +50%-20%
LC3502	NQR0470-003X	EMI FILTER	100pF 50V +50%-20%
LC3503	NQR0470-003X	EMI FILTER	100pF 50V +50%-20%
SL1211	CSB503F30-T2	C RESONATOR	
△TU1101	QAU0352-001	TUNER	
X3001	NAX0570-001X	CRYSTAL	27.000MHz

DEF / CONVERGENCE OUT P.W. BOARD ASS'Y (SRP-2002A-M2)

△Ref No.	Part No.	Part Name	Description Local
IC101	LA7860M-X	IC	
IC161	AN5441SA-W	IC	
IC162	BA10393F-XE	IC	
IC163	AN7805F	IC	
IC212	CXA1875AM-X	IC	
IC401	AN15525A	IC	
IC801	L7805CP	IC	
IC804	STK394-250	IC	
IC805	STK394-210	IC	
IC807	SN74LVC1G126V-X	IC	
Q101	2SD601A/QR/-X	TRANSISTOR	
Q102	2SD601A/QR/-X	TRANSISTOR	
Q131	2SD601A/QR/-X	TRANSISTOR	
Q132	2SD601A/QR/-X	TRANSISTOR	
Q162	2SD601A/QR/-X	TRANSISTOR	
Q168	2SD601A/QR/-X	TRANSISTOR	
Q171	2SB709A/QR/-X	TRANSISTOR	
Q172	2SB709A/QR/-X	TRANSISTOR	
Q401	2SC3311A/QR/-T	TRANSISTOR	
Q402	2SC3311A/QR/-T	TRANSISTOR	
Q501	BSN304-T	MOS FET	
Q503	2SC5931-RL	POW TRANSISTOR	
Q521	2SC3311A/QR/-T	TRANSISTOR	
Q531	IRF1620G	POWER MOS FET	
Q532	2SC1959/Y/-T	TRANSISTOR	
Q533	2SA562TM/Y/-T	TRANSISTOR	
Q806	2SD601A/QR/-X	TRANSISTOR	
Q807	2SD601A/QR/-X	TRANSISTOR	
Q808	2SD601A/QR/-X	TRANSISTOR	
Q809	2SD601A/QR/-X	TRANSISTOR	
Q810	2SD601A/QR/-X	TRANSISTOR	
Q971	2SA1208/ST/Z1-T	TRANSISTOR	
D164	1SS355-X	SI DIODE	
D165	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
D170	1SS355-X	SI DIODE	
D171	1SS355-X	SI DIODE	
D173	1SS355-X	SI DIODE	
D174	1SS355-X	SI DIODE	
D201	1SR35-400A-T2	SI DIODE	
D221	1SS355-X	SI DIODE	
D301	EU2-T3	SI DIODE	
D302	EU2-T3	SI DIODE	
D303	RU30A-F1	SI DIODE	
D311	1SR124-400A-T2	SI DIODE	
D401	MTZJ75-T2	Z DIODE	
D402	1SR35-400A-T2	SI DIODE	
D403	MA111-X	SI DIODE	
D404	MA8068/M/-X	CHIP ZENER DIODE	
D405	MA111-X	SI DIODE	
D406	MA8068/M/-X	CHIP ZENER DIODE	
D501	1SS81-T2	SI DIODE	
D504	RG2A-LFC4	SI DIODE	
D506	FMV-3FU-F1	SI DIODE	
D507	V11CA-C1	SI DIODE	
D521	MA8120-X	CHIP ZENER DIODE	
D522	MA111-X	SI DIODE	
D531	RGP10J-5025-T3	SI DIODE	
D561	MA4068N/Z1/-T2	Z DIODE	
D562	MA4068N/Z1/-T2	Z DIODE	
D583	MA111-X	SI DIODE	
D804	1SR153-400-T2	FR DIODE	
D805	1SR153-400-T2	FR DIODE	
D811	RD5.6E/B2/-T2	Z DIODE	
D812	RD5.6E/B2/-T2	Z DIODE	
D841	PTZ6.8B-X	Z DIODE	
D842	PTZ5.1B-X	Z DIODE	
D844	RD6.8E/B2/-T2	Z DIODE	
D845	RD6.8E/B2/-T2	Z DIODE	

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
D846	RD6.8E/B2/-T2	Z DIODE		C523	QFN32AJ-682Z	M CAPACITOR	6800pF 100V J
D847	RD6.8E/B2/-T2	Z DIODE		C524	QCS31HJ-470Z	C CAPACITOR	47pF 50V J
D850	RD5.6E/B2/-T2	Z DIODE		C525	QCB31HK-682Z	C CAPACITOR	6800pF 50V K
D972	MA8150/M-X	Z DIODE		C527	QETN1EM-476Z	E CAPACITOR	47uF 25V M
D973	MA111-X	SI DIODE		C533	QCS32HJ-561	C CAPACITOR	560pF 500V J
				C534	QFN32DK-222Z	M CAPACITOR	2200pF 200V K
C102	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C536	QFN32DJ-152Z	M CAPACITOR	1500pF 200V J
C103	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C591	QEZ0203-107	E CAPACITOR	100uF 160V M
C104	NDC31HJ-561X	C CAPACITOR	560pF 50V J	C701	QFLC2AJ-223Z	M CAPACITOR	0.022uF 100V J
C106	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	C803	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C107	NDC21HJ-122X	C CAPACITOR	1200pF 50V J	C804	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C108	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	C807	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C109	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C808	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C110	NCB31HK-102X	C CAPACITOR	1000pF 50V K	C809	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C111	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	C810	QETN1EM-107Z	E CAPACITOR	100uF 25V M
C112	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	C812	NDC31HJ-181X	C CAPACITOR	180pF 50V J
C113	NDC21HJ-122X	C CAPACITOR	1200pF 50V J	C818	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C114	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	C819	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C115	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	C820	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C116	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C821	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C117	QTMN1CM-477Z	E CAPACITOR	470uF 16V M	C822	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C118	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C823	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C120	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C824	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C121	QETN1CM-107Z	E CAPACITOR	100uF 16V M	C825	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C122	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C827	QETN1HM-477Z	E CAPACITOR	470uF 50V M
C123	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C828	QETN1HM-477Z	E CAPACITOR	470uF 50V M
C124	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C829	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C131	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C830	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C132	QETN1HM-105Z	E CAPACITOR	1uF 50V M	C831	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C133	NCB21EK-124X	C CAPACITOR	0.12uF 25V K	C832	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C134	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	C833	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C135	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	C834	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C136	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	C838	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C137	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	C844	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C138	NDC31HJ-181X	C CAPACITOR	180pF 50V J	C851	NDC31HJ-100X	C CAPACITOR	10pF 50V J
C161	QETN1CM-108Z	E CAPACITOR	1000uF 16V M	C852	NDC31HJ-100X	C CAPACITOR	10pF 50V J
C162	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C853	NDC31HJ-100X	C CAPACITOR	10pF 50V J
C163	QETN1AM-477Z	E CAPACITOR	470uF 10V M	C971	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C164	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C972	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C165	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C973	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C167	QFLM1HJ-332Z	M CAPACITOR	3300pF 50V J	R101	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C168	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R103	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J
C170	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R104	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C171	QFVF1HJ-184Z	MF CAPACITOR	0.18uF 50V J	R105	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
C172	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	R106	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C173	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	R107	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C175	NCB31HK-152X	C CAPACITOR	1500pF 50V K	R109	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
C178	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	R110	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C179	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	R111	NRSA63D-153X	MG RESISTOR	15kΩ 1/16W D
C180	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	R112	NRSA63D-182X	MG RESISTOR	1.8kΩ 1/16W D
C181	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	R113	NRSA63D-123X	MG RESISTOR	12kΩ 1/16W D
C182	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	R114	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C185	NCB31CK-563X	C CAPACITOR	0.056uF 16V K	R116	NRSA63D-182X	MG RESISTOR	1.8kΩ 1/16W D
C187	QFVF1HJ-224Z	MF CAPACITOR	0.22uF 50V J	R117	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C201	QFV21HJ-334Z	MF CAPACITOR	0.33uF 50V J	R120	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J
C212	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R121	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C221	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R122	QRG01GJ-470	OMF RESISTOR	47Ω 1W J
C301	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R123	QRK126J-101X	UNF C RESISTOR	100Ω 1/2W J
C302	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R126	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C303	QETM2EM-336	E CAPACITOR	33uF 250V M	R127	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C311	QETN1VM-107Z	E CAPACITOR	100uF 35V M	R129	NRSA63D-183X	MG RESISTOR	18kΩ 1/16W D
C312	QCB32HK-821Z	C CAPACITOR	820pF 500V K	R131	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C401	QETN1VM-108Z	E CAPACITOR	1000uF 35V M	R133	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
C402	QFN31HJ-152Z	M CAPACITOR	1500pF 50V J	R134	NRSA63J-334X	MG RESISTOR	330kΩ 1/16W J
C403	QCS32HJ-180Z	C CAPACITOR	18pF 500V J	R137	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C404	QFLC2AJ-104Z	M CAPACITOR	0.1uF 100V J	R139	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
C405	QFV21HJ-104Z	MF CAPACITOR	0.1uF 50V J	R140	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C406	QETN1VM-107Z	E CAPACITOR	100uF 35V M	R141	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C407	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R142	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C408	QFLC2AJ-104Z	M CAPACITOR	0.1uF 100V J	R143	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C409	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R161	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C411	QCB31HK-222Z	C CAPACITOR	2200pF 50V K	R162	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C412	QENC1CM-226Z	BP E CAPACITOR	22uF 16V M	R163	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C413	QENC1CM-226Z	BP E CAPACITOR	22uF 16V M	R164	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C415	QFLC2AJ-823Z	M CAPACITOR	0.082uF 100V J	R168	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C416	QCB31HK-682Z	C CAPACITOR	6800pF 50V K	R169	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C501	QCB32HK-331Z	C CAPACITOR	330pF 500V K	R172	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
C502	QFN32DK-103	M CAPACITOR	0.01uF 200V K	R174	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C503	QFV21HJ-224Z	MF CAPACITOR	0.22uF 50V J	R175	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C506	QFZ0122-452	MPP CAPACITOR	4500pF 1.8kV H	R176	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
C507	QFZ0122-452	MPP CAPACITOR	4500pF 1.8kV H	R177	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C508	QFP32JJ-103	PP CAPACITOR	0.01uF 630V J	R178	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C511	QFZ0128-404	MPP CAPACITOR	0.4uF DC400V H	R179	NRVA63D-562X	CMF RESISTOR	5.6kΩ 1/16W D
C513	QFZ0197-335	MPP CAPACITOR	3.3uF 250V J	R180	NRSA63D-152X	MG RESISTOR	1.5kΩ 1/16W D
C514	QCS32HJ-561	C CAPACITOR	560pF 500V J	R182	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C521	QCZ0122-681	C CAPACITOR	680pF 2kV K	R183	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C522	QCZ0122-681	C CAPACITOR	680pF 2kV K				

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
R184	NRSA63D-473X	MG RESISTOR	47kΩ 1/16W D	R835	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R185	NRSA63D-183X	MG RESISTOR	18kΩ 1/16W D	R836	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R186	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	R837	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R187	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R838	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R188	NRSA63D-101X	MG RESISTOR	100Ω 1/16W D	R839	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R189	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R840	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R190	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	R842	QRX01GJ-2R2	MF RESISTOR	2.2Ω 1W J
R193	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R843	QRL029J-221	OMF RESISTOR	220Ω 2W J
R195	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R844	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R196	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R846	QRX01GJ-1R5	MF RESISTOR	1.5Ω 1W J
R197	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	R847	QRL029J-151	OMF RESISTOR	150Ω 2W J
R198	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R848	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R207	NRS144F-274X	MG RESISTOR	270kΩ 1/4W F	R850	QRX01GJ-2R2	MF RESISTOR	2.2Ω 1W J
R208	NRS144F-274X	MG RESISTOR	270kΩ 1/4W F	R851	QRL029J-221	OMF RESISTOR	220Ω 2W J
R209	NRS144F-184X	MG RESISTOR	180kΩ 1/4W F	R852	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R216	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R854	QRX01GJ-1R5	MF RESISTOR	1.5Ω 1W J
R217	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R855	QRL029J-151	OMF RESISTOR	150Ω 2W J
R223	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R856	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R224	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R858	QRX01GJ-3R3	MF RESISTOR	3.3Ω 1W J
R226	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R859	QRL029J-221	OMF RESISTOR	220Ω 2W J
R227	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R860	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R230	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R862	QRX01GJ-1R8	MF RESISTOR	1.8Ω 1W J
R401	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	R863	QRL029J-151	OMF RESISTOR	150Ω 2W J
R402	NRVA63D-103X	CMF RESISTOR	10kΩ 1/16W D	R864	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R403	QRE121J-180Y	C RESISTOR	18Ω 1/2W J	R866	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R404	NRVA63D-682X	CMF RESISTOR	6.8kΩ 1/16W D	R867	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R405	NRVA63D-682X	CMF RESISTOR	6.8kΩ 1/16W D	R873	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R406	NRVA63D-472X	CMF RESISTOR	4.7kΩ 1/16W D	R874	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R407	NRVA63D-821X	CMF RESISTOR	820Ω 1/16W D	R972	NRSA63D-112X	MG RESISTOR	1.1kΩ 1/16W D
R408	NRVA63D-821X	CMF RESISTOR	820Ω 1/16W D	R973	QRA14CF-7501Y	CMF RESISTOR	7.5kΩ 1/4W F
R409	QRL029J-221	OMF RESISTOR	220Ω 2W J	R975	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J
R410	QRT029J-2R2	MF RESISTOR	2.2Ω 2W J	R977	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R412	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R978	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R413	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	L101	QQL01BK-470Z	PEAKING COIL	47uH K
R416	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	L103	NQL092K-100X	COIL	10uH K
R418	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	L104	NQL092K-100X	COIL	10uH K
R420	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	L105	QQL01BK-101Z	PEAKING COIL	100uH K
R421	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	L301	QQLZ026-140	COIL	14uH ±7%
R422	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L502	QQR1408-001	CHOCO COIL	
R426	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L505	QQR1149-004	LINEARITY COIL	
R427	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L531	QQR1422-005	CHOCO COIL	
R430	QRE121J-101Y	C RESISTOR	100Ω 1/2W J	L701	QQR1422-005	CHOCO COIL	
R431	QRE121J-101Y	C RESISTOR	100Ω 1/2W J	L802	QQL521J-470	COIL	47uH J
R432	QRE121J-101Y	C RESISTOR	100Ω 1/2W J	T501	QQR1111-001	DRIVE TRANSF	
R501	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	T701	QQR1458-001	DAF TRANS	
R502	QRE121J-123Y	C RESISTOR	12kΩ 1/2W J	CN007	QGB1506M1-16	CONNECTOR	B-B (1-16)
R503	QRE121J-152Y	C RESISTOR	1.5kΩ 1/2W J	CN008	QGB1506M1-16	CONNECTOR	B-B (1-16)
R504	QRL039J-222	OMF RESISTOR	2.2kΩ 3W J	CN00N	QJB003-101010	SIN ID C-C WIRE	
R505	QRL039J-222	OMF RESISTOR	2.2kΩ 3W J	CN00Y	WJK0170-001A	E-SI C WIRE C-B	
R506	QRE121J-5R6Y	C RESISTOR	5.6Ω 1/2W J	CN011	QGB2501J1-15	CONNECTOR	B-B (1-15)
R512	QRL029J-331	OMF RESISTOR	330Ω 2W J	CN012	QGB2501J1-15	CONNECTOR	B-B (1-15)
R521	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	CN0AA	WJP0037-001A	W TO B CONNE	
R522	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	△FR301	QRZ9011-1R0	FUSI RESISTOR	1Ω 1/2W J
R523	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	△FR302	QRZ9011-1R0	FUSI RESISTOR	1Ω 1/2W J
R524	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	△FR311	QRZ9011-4R7	FUSI RESISTOR	4.7Ω 1/2W J
R525	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	H401	LC30416-001A	HEAT SINK/AL-F/	
R526	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	H503	LC31212-001B	HEAT SINK/AL-F/	
R531	QRL029J-102	OMF RESISTOR	1kΩ 2W J	H506	LC30521-001A	HEAT SINK/AL-F/	
R532	QRL029J-820	OMF RESISTOR	82Ω 2W J	H531	CEHT11B-005QS	HEAT SINK	
R533	QRL029J-820	OMF RESISTOR	82Ω 2W J	H801	CEHT11B-002QS	HEAT SINK	
R534	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	H804	LC31881-001A	HEAT SINK	
R535	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	H805	LC31881-001A	HEAT SINK	
R536	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	K401	QQR0621-002Z	FERRITE BEADS	
R561	NRVA63D-472X	CMF RESISTOR	4.7kΩ 1/16W D	K501	QQR1139-001	FERRITE BEADS	
R562	NRVA63D-472X	CMF RESISTOR	4.7kΩ 1/16W D	K504	QQR1139-001	FERRITE BEADS	
R563	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	K801	QQR0621-002Z	FERRITE BEADS	
R565	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	K802	QQR0621-002Z	FERRITE BEADS	
R591	QRF154K-3R3	UNF WW RESISTOR	3.3Ω 15W K	K803	QQR0621-002Z	FERRITE BEADS	
R701	QRG01GJ-390	OMF RESISTOR	39Ω 1W J	K804	QQR0621-002Z	FERRITE BEADS	
R702	QRE121J-123Y	C RESISTOR	12kΩ 1/2W J	K805	QQR0621-002Z	FERRITE BEADS	
R703	QRZ0056-103Z	COMP RESISTOR	10kΩ 1/2W K	K806	QQR0621-002Z	FERRITE BEADS	
R801	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	K807	QQR0621-002Z	FERRITE BEADS	
R802	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	K808	QQR0621-002Z	FERRITE BEADS	
R803	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	K809	QQR0621-002Z	FERRITE BEADS	
R804	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	K810	QQR0621-002Z	FERRITE BEADS	
R805	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	K811	QQR0621-002Z	FERRITE BEADS	
R806	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J				
R811	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J				
R814	QRL029J-151	OMF RESISTOR	150Ω 2W J				
R818	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J				
R828	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J				
R829	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J				
R830	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J				
R831	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J				
R832	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J				
R833	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J				
R834	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J				

R CRT SOCKET P.W. BOARD ASS'Y (SRP-3101A-M2)

△Ref No.	Part No.	Part Name	Description Local
IC1001	TDA6111Q	IC	

△Ref No.	Part No.	Part Name	Description	Local
D1006	RM2C-LFA1	SI DIODE		
D1101	EU01N-T2	SI DIODE		
D1102	MA8150/M-X	Z DIODE		
C1002	QETN2EM-106Z	E CAPACITOR	10uF 250V M	
C1004	QETN2EM-106Z	E CAPACITOR	10uF 250V M	
C1005	QFZ9027-472	MM CAPACITOR	4700pF 1000V K	
C1101	NDC31HJ-6R0X	C CAPACITOR	6pF 50V J	
C1102	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C1103	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C1104	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C1107	QFK62EK-104Z	MM CAPACITOR	0.1uF 250V K	
C1108	NDC31HJ-561X	C CAPACITOR	560pF 50V J	
R1001	QRE121J-105Y	C RESISTOR	1MΩ 1/2W J	
R1002	QRC121K-102Z	COMP RESISTOR	1kΩ 1/2W K	
R1003	QRZ0107-152Z	C RESISTOR	1.5kΩ 1/2W K	
R1101	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
R1102	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R1103	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R1104	QRL039J-473	OMF RESISTOR	47kΩ 3W J	
R1106	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R1107	QRC121K-561Z	COMP RESISTOR	560Ω 1/2W K	
L1101	QQL26AJ-102Z	PEAKING COIL	1mH J	
L1102	QQL244K-5R6Z	PEAKING COIL	5.6uH K	
H1001	LC31150-002A	HEAT SINK/AL-F1		
SG1001	QAF0056-501Z	SURGE ABSORBER	500V M	
△SK1001	QNZ0536-001	CRT SOCKET		

G CRT SOCKET P.W. BOARD ASS'Y (SRP-3201A-M2)

△Ref No.	Part No.	Part Name	Description	Local
IC2001	TDA6111Q	IC		
D2006	RM2C-LFA1	SI DIODE		
D2101	EU01N-T2	SI DIODE		
D2102	MA8150/M-X	Z DIODE		
C2001	QETN2EM-106Z	E CAPACITOR	10uF 250V M	
C2002	QETN2EM-106Z	E CAPACITOR	10uF 250V M	
C2004	QETN2EM-106Z	E CAPACITOR	10uF 250V M	
C2005	QFZ9027-472	MM CAPACITOR	4700pF 1000V K	
C2010	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C2101	NDC31HJ-6R0X	C CAPACITOR	6pF 50V J	
C2102	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C2103	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C2104	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C2107	QFK62EK-104Z	MM CAPACITOR	0.1uF 250V K	
C2108	NDC31HJ-561X	C CAPACITOR	560pF 50V J	
R2001	QRE121J-105Y	C RESISTOR	1MΩ 1/2W J	
R2002	QRC121K-102Z	COMP RESISTOR	1kΩ 1/2W K	
R2003	QRZ0107-152Z	C RESISTOR	1.5kΩ 1/2W K	
R2010	NRSA63D-123X	MG RESISTOR	12kΩ 1/16W D	
R2011	NRSA63D-223X	MG RESISTOR	22kΩ 1/16W D	
R2012	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D	
R2101	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
R2102	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	
R2103	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R2104	QRL039J-473	OMF RESISTOR	47kΩ 3W J	
R2106	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R2107	QRC121K-561Z	COMP RESISTOR	560Ω 1/2W K	
L2001	QQL26AJ-102Z	PEAKING COIL	1mH J	
L2101	QQL26AJ-102Z	PEAKING COIL	1mH J	
L2102	QQL244K-5R6Z	PEAKING COIL	5.6uH K	
CN200E	WJP0058-001A	E-SI C WIRE C-B		
CN200V	QJB003-051810	SIN ID C-C WIRE		
CN2GBN	QJB003-042424	SIN ID C-B WIRE		
CN2RGK	QJB003-062211	SIN ID C-B WIRE		
CN2RGN	QJB003-042424	SIN ID C-B WIRE		
H2001	LC31150-002A	HEAT SINK/AL-F1		
SG2001	QAF0056-501Z	SURGE ABSORBER	500V M	
△SK2001	QNZ0536-001	CRT SOCKET		

B CRT SOCKET P.W. BOARD ASS'Y (SRP-3301A-M2)

△Ref No.	Part No.	Part Name	Description	Local
IC3001	TDA6111Q	IC		
Q3031	2SA1037AK/QR/-X	TRANSISTOR		
D3006	RM2C-LFA1	SI DIODE		
D3101	EU01N-T2	SI DIODE		
D3102	MA8150/M-X	Z DIODE		
D3201	MA111-X	SI DIODE		
C3002	QETN2EM-106Z	E CAPACITOR	10uF 250V M	
C3004	QETN2EM-106Z	E CAPACITOR	10uF 250V M	
C3005	QFZ9027-472	MM CAPACITOR	4700pF 1000V K	
C3101	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C3102	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C3103	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C3104	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C3107	QFK62EK-104Z	MM CAPACITOR	0.1uF 250V K	
C3108	NDC31HJ-561X	C CAPACITOR	560pF 50V J	
C3201	NDC31HJ-330X	C CAPACITOR	33pF 50V J	
R3001	QRE121J-105Y	C RESISTOR	1MΩ 1/2W J	
R3002	QRC121K-102Z	COMP RESISTOR	1kΩ 1/2W K	
R3003	QRZ0107-152Z	C RESISTOR	1.5kΩ 1/2W K	
R3031	NRSA63D-123X	MG RESISTOR	12kΩ 1/16W D	
R3032	NRSA63D-562X	MG RESISTOR	5.6kΩ 1/16W D	
R3033	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R3101	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
R3102	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	
R3103	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R3104	QRL039J-473	OMF RESISTOR	47kΩ 3W J	
R3106	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3107	QRC121K-561Z	COMP RESISTOR	560Ω 1/2W K	
R3201	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
L3101	QQL26AJ-102Z	PEAKING COIL	1mH J	
L3102	QQL244K-5R6Z	PEAKING COIL	5.6uH K	
CN3GBK	QJB003-062211	SIN ID C-B WIRE		
H3001	LC31150-002A	HEAT SINK/AL-F1		
SG3001	QAF0056-501Z	SURGE ABSORBER	500V M	
△SK3001	QNZ0536-001	CRT SOCKET		

VM P.W. BOARD ASS'Y (SRP-7201A-M2)

△Ref No.	Part No.	Part Name	Description	Local
Q7101	2SC1906-T	TRANSISTOR		
Q7102	2SA1005/MLK/-T	TRANSISTOR		
Q7103	2SC1959/Y/-T	TRANSISTOR		
Q7104	2SA562TM/Y/-T	TRANSISTOR		
Q7105	2SJ407	POWER MOS FET		
Q7106	2SK2381	POWER MOS FET		
D7101	1SS355-X	SI DIODE		
D7102	RGP10J-04TS-T3	SI DIODE		
D7103	RGP10J-04TS-T3	SI DIODE		
C7101	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7102	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C7103	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	
C7104	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	
C7107	QFN32DK-103	M CAPACITOR	0.01uF 200V K	
C7108	QFN32DK-103	M CAPACITOR	0.01uF 200V K	
C7109	QETN2CM-475Z	E CAPACITOR	4.7uF 160V M	
C7110	QETN2AM-226Z	E CAPACITOR	22uF 100V M	
C7111	QETN2AM-226Z	E CAPACITOR	22uF 100V M	
C7112	QFN31HJ-222Z	M CAPACITOR	2200pF 50V J	
C7113	QFN31HJ-222Z	M CAPACITOR	2200pF 50V J	
C7116	QCS32HJ-330Z	C CAPACITOR	33pF 500V J	
C7117	QFN32DK-103	M CAPACITOR	0.01uF 200V K	
C7118	QFN32DK-103	M CAPACITOR	0.01uF 200V K	
C7119	QFK62EK-104Z	MM CAPACITOR	0.1uF 250V K	
C7120	QCB32HK-152Z	C CAPACITOR	1500pF 500V K	
R7101	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7102	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R7103	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R7104	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R7105	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	
R7106	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R7107	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	

△Ref No.	Part No.	Part Name	Description Local
R7110	QRJ146J-681X	UNF C RESISTOR	680Ω 1/4W J
R7111	QRE121J-473Y	C RESISTOR	47kΩ 1/2W J
R7112	QRE121J-473Y	C RESISTOR	47kΩ 1/2W J
R7113	QRJ146J-681X	UNF C RESISTOR	680Ω 1/4W J
R7114	QRJ146J-470X	UNF C RESISTOR	47Ω 1/4W J
R7115	QRJ146J-470X	UNF C RESISTOR	47Ω 1/4W J
R7116	QRG01GJ-150	OMF RESISTOR	15Ω 1W J
R7119	QRG01GJ-220	OMF RESISTOR	22Ω 1W J
R7120	QRL039J-150	OMF RESISTOR	15Ω 3W J
R7121	QRL039J-150	OMF RESISTOR	15Ω 3W J
R7122	QRL039J-150	OMF RESISTOR	15Ω 3W J
R7123	QRL039J-150	OMF RESISTOR	15Ω 3W J
R7124	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
CN700J	QJB003-052610	SIN ID C-B WIRE	
H7105	CEHS12B-002Q	HEAT SINK	
H7106	CEHS12B-002Q	HEAT SINK	
K7101	QQR1114-001Z	FERRITE BEADS	

REMOCON SENSOR P.W. BOARD ASS'Y (SRP-8001A-M2)

△Ref No.	Part No.	Part Name	Description Local
IC8001	GP1UM281QK	IR DETECT UNIT	38kHz
D8001	MA8068-X	CHIP ZENER DIODE	
C8001	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C8002	QETN1EM-476Z	E CAPACITOR	47uF 25V M
R8001	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R8003	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R8004	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J

POWER P.W. BOARD ASS'Y (SRP-9001A-M2)

△Ref No.	Part No.	Part Name	Description Local
IC911	STR-X6737M-F2	IC	
IC921	SE140N	IC	
Q811	UN221C-X	DIGI TRANSISTOR	
Q950	UN221C-X	DIGI TRANSISTOR	
Q952	UN221C-X	DIGI TRANSISTOR	
Q953	2SC3928A/QR/-X	TRANSISTOR	
Q954	UN221C-X	DIGI TRANSISTOR	
Q955	UN2211-X	TRANSISTOR	
Q956	2SC3928A/QR/-X	TRANSISTOR	
Q961	UN221C-X	DIGI TRANSISTOR	
Q962	2SC4682-T	TRANSISTOR	
Q970	2SC3928A/QR/-X	TRANSISTOR	
D815	MA8150/M/-X	Z DIODE	
D816	MA8068/M/-X	CHIP ZENER DIODE	
△D901	RBV-606	BRIDGE DIODE	
△D911	RGP10J-5025-T3	SI DIODE	
D912	RGP10J-5025-T3	SI DIODE	
D913	MA111-X	SI DIODE	
D914	MA111-X	SI DIODE	
D915	SARS01-T2	SI DIODE	
D920	MA111-X	SI DIODE	
D921	MA8056/M/-X	Z DIODE	
D931	RU4AM-F1	SI DIODE	
D932	31DF6N-FC5	FR DIODE	
D935	RU3YX-LFC4	SI DIODE	
D936	FMX-G12S	SI DIODE	
D937	RGP10J-5025-T3	SI DIODE	
D938	FMX-G12S	SI DIODE	
D939	RD12E/B1/-T2	Z DIODE	
D941	MA8300/H/-X	Z DIODE	
D943	RD12E/B1/-T2	Z DIODE	
D956	MA111-X	SI DIODE	
D957	MA111-X	SI DIODE	
D958	MA8068/M/-X	CHIP ZENER DIODE	
D959	MA111-X	SI DIODE	
D961	MTZJ22B-T2	Z DIODE	
D970	MA8030/H/-X	Z DIODE	
D980	1SR35-400A-T2	SI DIODE	

△Ref No.	Part No.	Part Name	Description Local
D981	MA111-X	SI DIODE	
D983	1SR35-400A-T2	SI DIODE	
△C801	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K
△C802	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K
△C803	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K
C903	NCB31HK-221X	C CAPACITOR	220pF 50V K
△C904	QCZ9054-102	C CAPACITOR	1000pF AC250V Z
△C905	QCZ9054-102	C CAPACITOR	1000pF AC250V Z
△C906	QCZ9054-102	C CAPACITOR	1000pF AC250V Z
C907	QE20572-128	E CAPACITOR	1200uF 200V M
△C908	QCZ9054-102	C CAPACITOR	1000pF AC250V Z
C912	QCZ0340-332	C CAPACITOR	3300pF 2kV K
C913	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C914	QETN1HM-226Z	E CAPACITOR	22uF 50V M
C916	QCS31HJ-331Z	C CAPACITOR	330pF 50V J
C917	QFN31HJ-332Z	M CAPACITOR	3300pF 50V J
C918	QFVF1HJ-104Z	MF CAPACITOR	0.1uF 50V J
C919	QFP32GJ-103	PP CAPACITOR	0.01uF 400V J
C920	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C930	QCS31HJ-181Z	C CAPACITOR	180pF 50V J
C931	QE20203-227	E CAPACITOR	220uF 160V M
C932	QETM1EM-228	E CAPACITOR	2200uF 25V M
C934	QETM1VM-228	E CAPACITOR	2200uF 35V M
C935	QETN1VM-108Z	E CAPACITOR	1000uF 35V M
C937	QCZ0340-152	C CAPACITOR	1500pF 2kV K
C943	QETN1EM-227Z	E CAPACITOR	220uF 25V M
C945	QETM1HM-108	E CAPACITOR	1000uF 50V M
C954	QETN1HM-226Z	E CAPACITOR	22uF 50V M
C955	NCB21AK-105X	C CAPACITOR	1uF 10V K
C962	QETN1VM-477Z	E CAPACITOR	470uF 35V M
△C993	QCZ9078-222	C CAPACITOR	2200pF AC250V M
△C994	QCZ9078-222	C CAPACITOR	2200pF AC250V M
△C995	QCZ9078-222	C CAPACITOR	2200pF AC250V M
△C997	QCZ9078-222	C CAPACITOR	2200pF AC250V M
△C998	QCZ9078-222	C CAPACITOR	2200pF AC250V M
△C999	QCZ9078-222	C CAPACITOR	2200pF AC250V M
△R801	QRZ9041-275	C RESISTOR	2.7MΩ 1/2W K
R812	QRE121J-104Y	C RESISTOR	100kΩ 1/2W J
R813	QRE121J-104Y	C RESISTOR	100kΩ 1/2W J
R814	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R815	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R816	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R818	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R901	QRF154K-R51	UNF WW RESISTOR	0.51Ω 15W K
R910	QRE121J-152Y	C RESISTOR	1.5kΩ 1/2W J
R911	QRL029J-393	OMF RESISTOR	39kΩ 2W J
R912	QRT029J-R15	MF RESISTOR	0.15Ω 2W J
R913	QRT029J-R18	MF RESISTOR	0.18Ω 2W J
R917	QRK126J-102X	UNF C RESISTOR	1kΩ 1/2W J
R918	QRE121J-102Y	C RESISTOR	1kΩ 1/2W J
R920	QRE121J-684Y	C RESISTOR	680kΩ 1/2W J
R922	QRE121J-101Y	C RESISTOR	100Ω 1/2W J
R923	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R925	QRG01GJ-470	OMF RESISTOR	47Ω 1W J
R932	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R941	QRL039J-333	OMF RESISTOR	33kΩ 3W J
R944	QRE121J-182Y	C RESISTOR	1.8kΩ 1/2W J
R948	QRE121J-102Y	C RESISTOR	1kΩ 1/2W J
R957	QRL029J-102	OMF RESISTOR	1kΩ 2W J
R959	QRE121J-121Y	C RESISTOR	120Ω 1/2W J
R961	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R962	QRE121J-153Y	C RESISTOR	15kΩ 1/2W J
R963	QRE121J-153Y	C RESISTOR	15kΩ 1/2W J
R964	NRSA63D-682X	MG RESISTOR	6.8kΩ 1/16W D
R965	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R967	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R968	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R969	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R971	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R973	QRE121J-103Y	C RESISTOR	10kΩ 1/2W J
R974	QRE121J-153Y	C RESISTOR	15kΩ 1/2W J
R975	NRSA63D-153X	MG RESISTOR	15kΩ 1/16W D
R976	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
R986	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R988	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J
R989	QRG01GJ-152	OMF RESISTOR	1.5kΩ 1W J
△R999	QRZ0111-685	C RESISTOR	6.8MΩ 1/2W K
L931	QQL26AK-470Z	CHOKE COIL	47uH K
△T921	QQS0264-001	SW TRANSF	
CN001	QGB1506M1-16	CONNECTOR	B-B (1-16)
CN002	QGB1506M1-16	CONNECTOR	B-B (1-16)
CN003	QGB1506M1-16	CONNECTOR	B-B (1-16)
CN007	QGB1506L1-16	CONNECTOR	B-B (1-16)

△Ref No.	Part No.	Part Name	Description Local
CN008	QGB1506L1-16	CONNECTOR	B-B (1-16)
△CP934	ICP-N70-T	IC PROTECTOR	2.5A
△CP936	ICP-N70-T	IC PROTECTOR	2.5A
△CP941	ICP-N70-T	IC PROTECTOR	2.5A
△CP942	ICP-N70-T	IC PROTECTOR	2.5A
△CP943	ICP-N20-Y	IC PROTECTOR	800mA
△F801	QMF61U1-7R0-S	FUSE	7A AC125V
△F905	QMFZ049-5R0Z-E	FUSE	5A 125V
△FR915	QRZ9017-470	FUSI RESISTOR	47Ω 1/4W J
H901	LC30171-001A	HEAT SINK/FE-P/	
H911	LC31211-001A	HEAT SINK/AL-F/	
H936	CM42862-00J-H	HEAT SINK ASSY	
H940	CEHT11B-002QS	HEAT SINK	
K914	QQR0582-001Z	FERRITE BEADS	
K930	QQR0621-002Z	FERRITE BEADS	
K931	QQR0621-002Z	FERRITE BEADS	
K932	QQR0582-001Z	FERRITE BEADS	
K935	QQR0621-002Z	FERRITE BEADS	
K937	QQR0621-002Z	FERRITE BEADS	
K938	QQR0621-002Z	FERRITE BEADS	
△LF801	QQR1407-001	LINE FILTER	
△LF802	QQR1407-001	LINE FILTER	
PC811	PS2581AL1/QW/	PHOTO COUPLER	
PC921	PS2581AL1/QW/	PHOTO COUPLER	
△RY952	QSK0083-001	RELAY	
△VA801	QAF0060-621	VARISTOR	620V

DIGITAL INPUT MODULE P.W. BOARD ASS'Y (SRP-7803A-M2)

△Ref No.	Part No.	Part Name	Description Local
MD001	SRP-7803A-M2	DIGITAL INPUT MODULE PWB	

DIGITAL CONVERGENCE MODULE P.W. BOARD ASS'Y (SRP0K003A-M2)

△Ref No.	Part No.	Part Name	Description Local
MD001	SRP0K003A-M2	DIGITAL CONVERGENCE MODULE PWB	

MI-CON & DIST MODULE P.W. BOARD ASS'Y (SRP0D001A-M2)

△Ref No.	Part No.	Part Name	Description Local
MD001	SRP0D001A-M2	MI-CON & DIST MODULE PWB	

FRONT CONTROL P.W. BOARD ASS'Y (SRP0L001A-M2)

△Ref No.	Part No.	Part Name	Description Local
IC0703	BA05FP-X	IC	
Q0701	2SC3928A/QR/-X	TRANSISTOR	
Q0702	2SC3928A/QR/-X	TRANSISTOR	
D0402	MA8100/M/-X	Z DIODE	
D0403	MA8100/M/-X	Z DIODE	
D0404	MA8100/M/-X	Z DIODE	
D0405	MA8100/M/-X	Z DIODE	
D0406	MA8100/M/-X	Z DIODE	
D0701	HLMP-NS30-J0000	LED	POWER
D0703	MA8068-X	CHIP ZENER DIODE	
D0704	MA8068-X	CHIP ZENER DIODE	
D0735	MA8100/M/-X	Z DIODE	
C0442	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C0443	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C0444	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C0445	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C0446	QFLC1HJ-103Z	M CAPACITOR	0.01uF 50V J
C0710	QETN1VM-476Z	E CAPACITOR	47uF 35V M
C0711	QETN1CM-336Z	E CAPACITOR	33uF 16V M
C0712	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
R0401	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R0402	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R0403	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R0404	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R0405	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R0413	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R0414	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R0415	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R0416	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R0706	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J
R0707	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R0708	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R0711	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R0712	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R0732	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R0748	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R0749	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J
R0750	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R0751	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J
J0401	QNZ0438-001	AV JACK	S/V/L/R IN
S0701	QSW0619-003Z	TACT SWITCH	POWER
S0702	QSW0619-003Z	TACT SWITCH	MENU
S0703	QSW0619-003Z	TACT SWITCH	CH-
S0704	QSW0619-003Z	TACT SWITCH	CH+
S0705	QSW0619-003Z	TACT SWITCH	VOL-
S0706	QSW0619-003Z	TACT SWITCH	VOL+
S0707	QSW0619-003Z	TACT SWITCH	SUPER FOCUS

PRINTED WIRING BOARD PARTS LIST [AV-56P575/H]

MAIN P.W. BOARD ASS'Y (SRP-1004A-M2)

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
IC1101	L7805CP	IC		D1401	MA111-X	SI DIODE	
IC1140	CXA2205Q-X	IC		D1402	UDZS5.1B-X	Z DIODE	
IC1211	TA1318N	IC		D1403	MA111-X	SI DIODE	
IC1212	SN74AHC2G08T-X	IC		D1513	MA111-X	SI DIODE	
IC1301	AN15852A	IC		D1596	MA8100/M/-X	Z DIODE	
IC1501	CXA2069Q	IC		D1667	MA111-X	SI DIODE	
IC1502	M62320FP-X	IC		D1668	MA111-X	SI DIODE	
IC1511	PQ033RD01SZ	IC		D1669	MA111-X	SI DIODE	
IC1641	NJM2150AM-X	IC		D1702	MA111-X	SI DIODE	
IC1661	AN5277	IC		D1703	MA111-X	SI DIODE	
IC1703	AT24C128-56P585	IC	(SERVICE)	D1704	MA8100/M/-X	Z DIODE	
IC1802	BA033T	REGULATOR IC		D1705	MA8100/M/-X	Z DIODE	
IC1941	PQ1CG21H2FZ	IC		D1712	MA111-X	SI DIODE	
IC1942	SI-8050JD-W	IC		D1802	MA111-X	SI DIODE	
IC1943	PQ1CY1032Z-W	IC		D1895	MA8082/M/-X	Z DIODE	
IC1981	PQ070XZ01Z-X	IC		D1896	MA8082/M/-X	Z DIODE	
IC1991	PQ12RD11	IC		D1897	MA8051/M/-X	Z DIODE	
IC1993	MM1565AF-X	IC		D1898	MA8051/M/-X	Z DIODE	
IC3001	MN82832	IC		D1947	EC31QS04-X	SB DIODE	
IC3002	R1170H331B-X	IC		D1948	EC31QS04-X	SB DIODE	
IC6001	NJM2701M-X	IC		D1949	EC31QS04-X	SB DIODE	
Q0701	2SK2090-X	MOS FET		D1962	MA3030/H/-X	Z DIODE	
Q0702	2SK2090-X	MOS FET		D1964	MA111-X	SI DIODE	
Q1101	2SA1530A/QR/-X	TRANSISTOR		D1965	MA111-X	SI DIODE	
Q1102	2SC3928A/QR/-X	TRANSISTOR		D1967	PTZ6.8B-X	Z DIODE	
Q1232	2SA1530A/QR/-X	TRANSISTOR		D1968	PTZ3.9B-X	Z DIODE	
Q1252	2SA1530A/QR/-X	TRANSISTOR		D1969	PTZ11B-X	Z DIODE	
Q1253	2SC3928A/QR/-X	TRANSISTOR		D1981	MA111-X	SI DIODE	
Q1254	2SA1530A/QR/-X	TRANSISTOR		D1991	MA111-X	SI DIODE	
Q1255	2SC3928A/QR/-X	TRANSISTOR		D1993	MA111-X	SI DIODE	
Q1301	2SC3837K/NP/-X	TRANSISTOR		D2101	MA8100/M/-X	Z DIODE	
Q1302	2SC3837K/NP/-X	TRANSISTOR		D2121	MA8100/M/-X	Z DIODE	
Q1303	2SC3837K/NP/-X	TRANSISTOR		D2201	MA8100/M/-X	Z DIODE	
Q1401	2SC3928A/QR/-X	TRANSISTOR		D2204	MA8100/M/-X	Z DIODE	
Q1511	2SC3928A/QR/-X	TRANSISTOR		D2205	MA8100/M/-X	Z DIODE	
Q1531	2SC3928A/QR/-X	TRANSISTOR		D2206	MA8100/M/-X	Z DIODE	
Q1668	UN2213-X	DIGI TRANSISTOR		D2209	MA8100/M/-X	Z DIODE	
Q1669	2SC3928A/QR/-X	TRANSISTOR		D2210	MA8100/M/-X	Z DIODE	
Q1671	UN2213-X	DIGI TRANSISTOR		D2212	MA8100/M/-X	Z DIODE	
Q1672	2SC3928A/QR/-X	TRANSISTOR		D2213	MA8100/M/-X	Z DIODE	
Q1673	2SA1530A/QR/-X	TRANSISTOR		D2215	MA8100/M/-X	Z DIODE	
Q1674	2SC3928A/QR/-X	TRANSISTOR		D2216	MA8100/M/-X	Z DIODE	
Q1712	2SA1530A/QR/-X	TRANSISTOR		D2217	MA8100/M/-X	Z DIODE	
Q1713	2SC2785/JH/-T	SI TRANSISTOR		D2218	MA8100/M/-X	Z DIODE	
Q1714	2SA1530A/QR/-X	TRANSISTOR		D2219	MA8100/M/-X	Z DIODE	
Q1961	2SC3928A/QR/-X	TRANSISTOR		D2401	MA8100/M/-X	Z DIODE	
Q1962	2SC3928A/QR/-X	TRANSISTOR		D2402	MA8100/M/-X	Z DIODE	
Q1964	2SC3928A/QR/-X	TRANSISTOR		D2403	MA8100/M/-X	Z DIODE	
Q1965	UN2213-X	DIGI TRANSISTOR		D2404	MA8100/M/-X	Z DIODE	
Q1966	UN2213-X	DIGI TRANSISTOR		D2406	MA8100/M/-X	Z DIODE	
Q1967	UN2213-X	DIGI TRANSISTOR		D2421	MA8100/M/-X	Z DIODE	
Q1981	2SC4682-T	TRANSISTOR		D2422	MA8100/M/-X	Z DIODE	
Q1984	2SC4682-T	TRANSISTOR		C1101	QETN1CM-477Z	E CAPACITOR	470uF 16V M
Q3001	2SC3928A/QR/-X	TRANSISTOR		C1102	QETN1CM-107Z	E CAPACITOR	100uF 16V M
Q3002	2SC3928A/QR/-X	TRANSISTOR		C1103	QETN1HM-106Z	E CAPACITOR	10uF 50V M
Q3003	2SA1530A/QR/-X	TRANSISTOR		C1111	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
Q3004	2SC3928A/QR/-X	TRANSISTOR		C1140	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
Q3005	2SC3928A/QR/-X	TRANSISTOR		C1141	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
Q3006	2SA1530A/QR/-X	TRANSISTOR		C1144	QETN1HM-106Z	E CAPACITOR	10uF 50V M
Q3007	2SA1530A/QR/-X	TRANSISTOR		C1145	NCB31HK-223X	C CAPACITOR	0.022uF 50V K
Q3501	2SA1530A/QR/-X	TRANSISTOR		C1146	NCB31HK-472X	C CAPACITOR	4700pF 50V K
Q3502	2SC3928A/QR/-X	TRANSISTOR		C1147	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
Q3505	2SA1530A/QR/-X	TRANSISTOR		C1148	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
Q3506	2SC3928A/QR/-X	TRANSISTOR		C1149	NCB31HK-472X	C CAPACITOR	4700pF 50V K
Q3509	2SA1530A/QR/-X	TRANSISTOR		C1150	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
Q3510	2SC3928A/QR/-X	TRANSISTOR		C1151	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
Q6001	2SC3928A/QR/-X	TRANSISTOR		C1152	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
Q6002	2SC3928A/QR/-X	TRANSISTOR		C1153	NCB31HK-562X	C CAPACITOR	5600pF 50V K
D1093	MA8082/M/-X	Z DIODE		C1154	NCB31HK-123X	C CAPACITOR	0.012uF 50V K
D1140	MA8100/M/-X	Z DIODE		C1155	QETN1HM-105Z	E CAPACITOR	1uF 50V M
D1141	MA8100/M/-X	Z DIODE		C1156	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
D1145	MA8082/M/-X	Z DIODE		C1157	QETN1HM-106Z	E CAPACITOR	10uF 50V M
D1146	MA8082/M/-X	Z DIODE		C1158	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
D1251	MA8100/M/-X	Z DIODE		C1159	QETN1CM-107Z	E CAPACITOR	100uF 16V M
D1252	MA8100/M/-X	Z DIODE		C1160	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
D1253	MA111-X	SI DIODE		C1161	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
D1301	MA8100/M/-X	Z DIODE		C1162	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
D1302	MA8100/M/-X	Z DIODE		C1163	NCB31HK-272X	C CAPACITOR	2700pF 50V K
D1305	MA8100/M/-X	Z DIODE		C1164	NCB31HK-473X	C CAPACITOR	0.047uF 50V K
D1306	MA8100/M/-X	Z DIODE		C1165	QETN1HM-335Z	E CAPACITOR	3.3uF 50V M
				C1166	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
				C1167	QETN1HM-106Z	E CAPACITOR	10uF 50V M
				C1168	QETN1HM-105Z	E CAPACITOR	1uF 50V M

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
C1169	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	C1652	NCB31CK-153X	C CAPACITOR	0.015uF 16V K
C1170	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	C1653	NCB31CK-473X	C CAPACITOR	0.047uF 16V K
C1171	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C1667	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1172	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C1668	NDC31HJ-101X	C CAPACITOR	100pF 50V J
C1213	QETN1CM-107Z	E CAPACITOR	100uF 16V M	C1669	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1214	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	C1670	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1215	QFLC1HJ-103Z	M CAPACITOR	0.01uF 50V J	C1671	NDC31HJ-101X	C CAPACITOR	100pF 50V J
C1216	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	C1672	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1218	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1673	QETN1HM-477Z	E CAPACITOR	470uF 50V M
C1219	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	C1674	QETM1HM-108	E CAPACITOR	1000uF 50V M
C1233	NDC31HJ-180X	C CAPACITOR	18pF 50V J	C1675	QFV21HJ-124Z	MF CAPACITOR	0.12uF 50V J
C1257	QETN1HM-105Z	E CAPACITOR	1uF 50V M	C1676	QFV21HJ-124Z	MF CAPACITOR	0.12uF 50V J
C1258	QETN1HM-105Z	E CAPACITOR	1uF 50V M	C1677	QETN1EM-108Z	E CAPACITOR	1000uF 25V M
C1301	QETN1CM-107Z	E CAPACITOR	100uF 16V M	C1678	QETN1EM-108Z	E CAPACITOR	1000uF 25V M
C1302	QETN1CM-107Z	E CAPACITOR	100uF 16V M	C1679	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C1303	QETN1CM-107Z	E CAPACITOR	100uF 16V M	C1680	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C1304	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C1696	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1305	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C1697	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C1306	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C1702	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1307	QETN1CM-106Z	E CAPACITOR	10uF 16V M	C1712	QETN1AM-227Z	E CAPACITOR	220uF 10V M
C1308	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1806	QETN1VM-476Z	E CAPACITOR	47uF 35V M
C1309	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1807	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C1311	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1941	QETN1VM-477Z	E CAPACITOR	470uF 35V M
C1312	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1942	QETN1CM-108Z	E CAPACITOR	1000uF 16V M
C1313	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1943	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C1322	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1944	QETN1VM-477Z	E CAPACITOR	470uF 35V M
C1323	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1945	QEZ0256-128	E CAPACITOR	1200uF 10V M
C1324	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1946	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C1325	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1947	QETN1CM-477Z	E CAPACITOR	470uF 16V M
C1326	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C1948	QETN1CM-477Z	E CAPACITOR	470uF 16V M
C1327	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C1949	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M
C1328	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C1950	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M
C1329	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1951	QETN1VM-477Z	E CAPACITOR	470uF 35V M
C1331	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1952	QEZ0256-128	E CAPACITOR	1200uF 10V M
C1332	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1953	QETN0JM-228Z	E CAPACITOR	2200uF 6.3V M
C1333	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1955	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C1341	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1961	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C1342	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1981	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C1343	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1984	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M
C1351	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1985	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M
C1352	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1991	QETN1EM-107Z	E CAPACITOR	100uF 25V M
C1353	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1992	QETN1CM-477Z	E CAPACITOR	470uF 16V M
C1354	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1994	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1355	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1995	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1371	QETN1CM-336Z	E CAPACITOR	33uF 16V M	C1996	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1372	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C2102	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1381	QETN1CM-336Z	E CAPACITOR	33uF 16V M	C2103	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1382	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C2104	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1391	QETN1CM-336Z	E CAPACITOR	33uF 16V M	C2105	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1392	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C2106	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1403	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	C2123	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1404	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	C2124	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1405	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	C2126	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1406	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	C2127	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1409	QETN1HM-106Z	E CAPACITOR	10uF 50V M	C2128	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1410	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C2144	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C2145	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1412	QETN1CM-107Z	E CAPACITOR	100uF 16V M	C2146	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1415	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C2302	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1416	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C2303	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1417	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C2322	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1418	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C2323	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1421	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	C2341	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1423	QETN1HM-476Z	E CAPACITOR	47uF 50V M	C2342	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1442	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C2343	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1501	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C3001	QENC1AM-336Z	BP E CAPACITOR	33uF 10V M
C1502	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C3002	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C1510	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M	C3003	NDC31HJ-121X	C CAPACITOR	120pF 50V J
C1519	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C3004	NDC31HJ-150X	C CAPACITOR	15pF 50V J
C1531	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C3005	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z
C1532	QETN1HM-226Z	E CAPACITOR	22uF 50V M	C3006	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1539	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	C3007	NCB31AK-334X	C CAPACITOR	0.33uF 10V K
C1540	QETN1AM-107Z	E CAPACITOR	100uF 10V M	C3008	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C1553	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C3009	NDC31HJ-121X	C CAPACITOR	120pF 50V J
C1554	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C3010	NDC31HJ-150X	C CAPACITOR	15pF 50V J
C1555	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C3011	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z
C1556	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C3012	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1557	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C3013	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1579	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C3014	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C1641	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M	C3015	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1642	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	C3016	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1643	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	C3017	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C1645	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C3018	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1646	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C3019	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1647	QETN1HM-226Z	E CAPACITOR	22uF 50V M	C3020	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1648	QETN1HM-106Z	E CAPACITOR	10uF 50V M	C3021	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1651	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M	C3022	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
C3023	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z				
C3024	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R0705	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3025	QETN1CM-106Z	E CAPACITOR	10uF 16V M	R0706	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3026	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1097	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C3027	NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	R1104	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3028	NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	R1105	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3029	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1107	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
C3030	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1110	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3031	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1111	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J
C3032	NDC31HJ-560X	C CAPACITOR	56pF 50V J	R1112	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3033	NDC31HJ-330X	C CAPACITOR	33pF 50V J	R1140	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J
C3034	NDC31HJ-560X	C CAPACITOR	56pF 50V J	R1141	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3035	NDC31HJ-330X	C CAPACITOR	33pF 50V J	R1142	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3036	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1143	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J
C3037	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1144	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
C3038	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1145	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C3039	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1146	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
C3041	QETN1CM-106Z	E CAPACITOR	10uF 16V M	R1147	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J
C3042	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1149	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3044	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1151	NRSA63J-302X	MG RESISTOR	3kΩ 1/16W J
C3045	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1152	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
C3046	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1157	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3047	QETN1CM-106Z	E CAPACITOR	10uF 16V M	R1158	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3048	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1202	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3049	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1203	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3050	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1218	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J
C3051	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1219	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C3052	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1220	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3053	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1221	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3054	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1226	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3055	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1228	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C3056	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1229	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3057	QETN1CM-106Z	E CAPACITOR	10uF 16V M	R1230	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3058	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1231	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3059	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1232	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C3060	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1234	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C3061	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1236	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C3062	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1240	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3063	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1261	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C3064	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1262	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C3065	QETN1CM-106Z	E CAPACITOR	10uF 16V M	R1265	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3066	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1266	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3067	QETN1CM-476Z	E CAPACITOR	47uF 16V M	R1267	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
C3068	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R1268	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3069	QETN1CM-476Z	E CAPACITOR	47uF 16V M	R1269	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3070	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R1272	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C3071	QETN1CM-476Z	E CAPACITOR	47uF 16V M	R1282	QRE141J-221Y	C RESISTOR	220Ω 1/4W J
C3072	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1283	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
C3077	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	R1284	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3078	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1285	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
C3079	NDC31HJ-470X	C CAPACITOR	47pF 50V J	R1286	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3080	QBTC1CK-106Z	TA E CAPACITOR	10uF 16V K	R1287	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
C3082	NDC31HJ-151X	C CAPACITOR	150pF 50V J	R1301	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3086	NCB31HK-152X	C CAPACITOR	1500pF 50V K	R1302	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3088	NDC31HJ-100X	C CAPACITOR	10pF 50V J	R1337	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
C3089	NDC31HJ-100X	C CAPACITOR	10pF 50V J	R1347	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
C3090	NDC31HJ-100X	C CAPACITOR	10pF 50V J	R1372	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3099	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1374	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C3100	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1375	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C3501	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1378	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3502	NDC31HJ-101X	C CAPACITOR	100pF 50V J	R1382	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3503	NDC31HJ-121X	C CAPACITOR	120pF 50V J	R1384	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C3504	NDC31HJ-150X	C CAPACITOR	15pF 50V J	R1385	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C3506	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	R1392	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3507	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1394	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C3508	NDC31HJ-101X	C CAPACITOR	100pF 50V J	R1395	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C3509	NDC31HJ-121X	C CAPACITOR	120pF 50V J	R1401	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3510	NDC31HJ-150X	C CAPACITOR	15pF 50V J	R1402	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3512	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	R1421	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J
C3513	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1422	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3514	NDC31HJ-101X	C CAPACITOR	100pF 50V J	R1423	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3515	NDC31HJ-121X	C CAPACITOR	120pF 50V J	R1501	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
C3516	NDC31HJ-150X	C CAPACITOR	15pF 50V J	R1502	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
C3518	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	R1505	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C3519	QENC1CM-336Z	BP E CAPACITOR	33uF 16V M	R1511	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3520	QENC1CM-336Z	BP E CAPACITOR	33uF 16V M	R1513	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3521	QENC1CM-336Z	BP E CAPACITOR	33uF 16V M	R1514	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C6001	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M	R1515	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C6002	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M	R1516	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C6003	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1517	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C6004	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1518	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C6005	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1519	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C6006	NCB31CK-273X	C CAPACITOR	0.027uF 16V K	R1520	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C6007	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1521	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C6008	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1522	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C6009	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R1523	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
C6010	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1524	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
R1525	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R1971	QRT039J-R68	MF RESISTOR	0.68Ω 3W J
R1526	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R1975	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1527	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R1978	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1528	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	△R1981	QRK126J-181X	UNF C RESISTOR	180Ω 1/2W J
R1529	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R1982	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D
R1530	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R1983	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D
R1533	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R1984	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J
R1534	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R1985	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R1535	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	△R1986	QRK126J-331X	UNF C RESISTOR	330Ω 1/2W J
R1536	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R1991	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R1537	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R1992	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R1538	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R2102	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1539	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R2103	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1560	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R2104	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1562	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R2105	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1571	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R2106	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1577	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R2122	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1578	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R2123	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1579	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R2125	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1611	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R2126	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1612	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R2127	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1613	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R2144	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1614	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	R2145	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1615	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R2146	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1616	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	R2305	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1641	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R2308	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1642	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R2325	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1643	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R2328	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1649	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R3001	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R1651	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3002	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R1652	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R3003	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1653	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R3004	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R1658	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R3005	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J
R1659	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R3006	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R1665	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R3007	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1666	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R3009	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D
R1667	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R3010	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R1668	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R3012	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R1669	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R3013	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R1670	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R3014	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1671	QRJ146J-2R2X	UNF C RESISTOR	2.2Ω 1/4W J	R3015	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R1672	QRJ146J-2R2X	UNF C RESISTOR	2.2Ω 1/4W J	R3016	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J
R1673	QRK126J-102X	UNF C RESISTOR	1kΩ 1/2W J	R3017	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R1674	QRK126J-102X	UNF C RESISTOR	1kΩ 1/2W J	R3018	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1680	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	R3020	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D
R1681	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R3021	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R1682	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R3023	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R1691	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	R3024	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R1694	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	R3025	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R1695	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R3026	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R1696	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R3027	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R1697	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R3028	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R1701	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R3029	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R1702	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R3030	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R1703	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R3039	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1712	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	R3040	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1713	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	R3042	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R1714	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	R3045	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1715	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R3047	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R1716	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3048	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R1718	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R3049	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R1895	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R3050	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
R1896	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R3051	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R1897	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R3052	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R1898	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R3053	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R1899	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R3054	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R1900	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R3055	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R1942	NRSA63D-122X	MG RESISTOR	1.2kΩ 1/16W D	R3058	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1943	NRSA63D-123X	MG RESISTOR	12kΩ 1/16W D	R3059	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
△R1944	QRK126J-220X	UNF C RESISTOR	22Ω 1/2W J	R3060	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R1945	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3065	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1946	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3066	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1949	NRSA63D-122X	MG RESISTOR	1.2kΩ 1/16W D	R3502	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1950	NRSA63D-822X	MG RESISTOR	8.2kΩ 1/16W D	R3503	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R1952	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	R3504	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J
R1953	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	R3505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R1957	NRSA63D-682X	MG RESISTOR	6.8kΩ 1/16W D	R3507	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1959	NRSA63D-182X	MG RESISTOR	1.8kΩ 1/16W D	R3508	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R1961	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3509	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R1962	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	R3511	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R1963	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	R3516	NRSA63J-680X	MG RESISTOR	68Ω 1/16W J
R1964	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R3518	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1965	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3519	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R1966	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	R3520	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J
R1967	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	R3521	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R1968	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3523	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1969	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3525	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J

△Ref No.	Part No.	Part Name	Description Local
R3532	NRSA63J-680X	MG RESISTOR	68Ω 1/16W J
R3534	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3535	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R3536	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J
R3537	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R3539	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3541	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R3548	NRSA63J-680X	MG RESISTOR	68Ω 1/16W J
R3549	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R3550	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R3551	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3552	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R3553	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R3554	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R3555	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R6001	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R6002	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R6003	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R6004	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R6006	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R6007	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R6008	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6009	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
RA3001	NRZ0040-103X	NET RESISTOR	10kΩ 1/16W J
RA3002	NRZ0040-103X	NET RESISTOR	10kΩ 1/16W J
RA3003	NRZ0040-103X	NET RESISTOR	10kΩ 1/16W J
RA3004	NRZ0040-103X	NET RESISTOR	10kΩ 1/16W J
L1211	QQL244K-100Z	PEAKING COIL	10uH K
L1401	QQL244K-100Z	PEAKING COIL	10uH K
L1402	QQL26AK-100Z	CHOKE COIL	10uH K
L1941	QQR1401-001	CHOKE COIL	
L1942	QQR1401-001	CHOKE COIL	
L1943	QQL26AK-330Z	CHOKE COIL	33uH K
L1944	QQL26AK-330Z	CHOKE COIL	33uH K
L1945	QQL26AK-220Z	CHOKE COIL	22uH K
L1946	QQL26AK-220Z	CHOKE COIL	22uH K
L1947	QQR1401-001	CHOKE COIL	
L1948	QQL26AK-100Z	CHOKE COIL	10uH K
L1950	QQL26AK-470Z	CHOKE COIL	47uH K
L1951	QQL26AK-470Z	CHOKE COIL	47uH K
L1952	QQL26AK-470Z	CHOKE COIL	47uH K
L1983	QRN143J-0R0X	C RESISTOR	0Ω 1/4W J
L3001	NQL092K-6R8X	COIL	6.8uH K
L3002	NQL092K-6R8X	COIL	6.8uH K
L3003	NQR0413-003X	FERRITE BEADS	
L3004	NQR0413-003X	FERRITE BEADS	
L3007	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
L3501	NQL092K-6R8X	COIL	6.8uH K
L3502	NQL092K-6R8X	COIL	6.8uH K
L3503	NQL092K-6R8X	COIL	6.8uH K
CN1001	QGB1506L1-16	CONNECTOR	B-B (1-16)
CN1002	QGB1506L1-16	CONNECTOR	B-B (1-16)
CN1003	QGB1506L1-16	CONNECTOR	B-B (1-16)
CN100Q	WJP0053-004A	E-SH C WIRE C-B	
CN10AU	WJP0052-002A	E-SH C WIRE C-B	
CN10DC	QJB003-043014	SIN ID C-B WIRE	
CN10SR	QJB003-052610	SIN ID C-B WIRE	
H1661	LC30145-003A	HEAT SINK/AL-F	
H1802	CM42862-A0A	HEAT SINK ASSY	
J1091	QNS0242-001	3.5 JACK	AV COMPULINK
J2101	QNN0628-001	PIN JACK	V/L IN
J2102	QNN0629-001	PIN JACK	R IN/LR OUT/CENTER CH IN
J2111	QND0121-001	S JACK	S IN
J2121	QNN0638-001	PIN JACK	COMP-1/-2 IN
K1943	QRN143J-0R0X	C RESISTOR	0Ω 1/4W J
K1944	QRN143J-0R0X	C RESISTOR	0Ω 1/4W J
LC1301	QQR1199-001	EMI FILTER	
LC1302	QQR1199-001	EMI FILTER	
LC1303	QQR1199-001	EMI FILTER	
LC2301	QQR1199-001	EMI FILTER	
LC2302	QQR1199-001	EMI FILTER	
LC2303	QQR1199-001	EMI FILTER	
LC2321	QQR1199-001	EMI FILTER	
LC2322	QQR1199-001	EMI FILTER	
LC2323	QQR1199-001	EMI FILTER	
LC2341	QQR1199-001	EMI FILTER	
LC2342	QQR1199-001	EMI FILTER	
LC2343	QQR1199-001	EMI FILTER	
LC3001	NQR0470-001X	EMI FILTER	22pF 50V +50%-20%
LC3002	NQR0470-001X	EMI FILTER	22pF 50V +50%-20%
LC3003	NQR0483-005X	EMI FILTER	
LC3004	NQR0470-003X	EMI FILTER	100pF 50V +50%-20%
LC3005	NQR0470-001X	EMI FILTER	22pF 50V +50%-20%
LC3006	NQR0470-003X	EMI FILTER	100pF 50V +50%-20%
LC3007	NQR0470-001X	EMI FILTER	22pF 50V +50%-20%

△Ref No.	Part No.	Part Name	Description Local
LC3008	NQR0470-001X	EMI FILTER	22pF 50V +50%-20%
LC3501	NQR0470-003X	EMI FILTER	100pF 50V +50%-20%
LC3502	NQR0470-003X	EMI FILTER	100pF 50V +50%-20%
LC3503	NQR0470-003X	EMI FILTER	100pF 50V +50%-20%
SL1211	CSB503F30-T2	C RESONATOR	
△TU1101	QAU0352-001	TUNER	
X3001	NAX0570-001X	CRYSTAL	27.000MHz

DEF / CONVERGENCE OUT P.W. BOARD ASS'Y (SRP-2002A-M2)

REFER TO PARTS LIST IN PAGE 3-11 FOR THIS P.W. BOARD.

R CRT SOCKET P.W. BOARD ASS'Y (SRP-3101A-M2)

REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD.

G CRT SOCKET P.W. BOARD ASS'Y (SRP-3201A-M2)

REFER TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD.

B CRT SOCKET P.W. BOARD ASS'Y (SRP-3301A-M2)

REFER TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD.

VM P.W. BOARD ASS'Y (SRP-7201A-M2)

REFER TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD.

REMOCON SENSOR P.W. BOARD ASS'Y (SRP-8001A-M2)

REFER TO PARTS LIST IN PAGE 3-15 FOR THIS P.W. BOARD.

POWER P.W. BOARD ASS'Y (SRP-9001A-M2)

REFER TO PARTS LIST IN PAGE 3-15 FOR THIS P.W. BOARD.

FRONT CONTROL P.W. BOARD ASS'Y (SRP0L001A-M2)

REFER TO PARTS LIST IN PAGE 3-16 FOR THIS P.W. BOARD.

DIGITAL INPUT MODULE P.W. BOARD ASS'Y (SRP-7804A-M2)

△Ref No.	Part No.	Part Name	Description Local
MD001	SRP-7804A-M2	DIGITAL INPUT MODULE PWB	

DIGITAL CONVERGENCE MODULE P.W. BOARD ASS'Y (SRP0K002A-M2)

△Ref No.	Part No.	Part Name	Description Local
MD001	SRP0K002A-M2	DIGITAL CONVERGENCE MODULE PWB	

MI-CON & DIST MODULE P.W. BOARD ASS'Y (SRP0D001A-M2)

REFER TO PARTS LIST IN PAGE 3-16 FOR THIS P.W. BOARD.

PRINTED WIRING BOARD PARTS LIST [AV-56P585/H]

MAIN P.W. BOARD ASS'Y (SRP-1002A-M2)

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
IC1101	L7805CP	IC		D1401	MA111-X	SI DIODE	
IC1140	CXA2205Q-X	IC		D1402	UDZS5.1B-X	Z DIODE	
IC1211	TA1318N	IC		D1403	MA111-X	SI DIODE	
IC1212	SN74AHC2G08T-X	IC		D1513	MA111-X	SI DIODE	
IC1301	AN15852A	IC		D1596	MA8100/M/-X	Z DIODE	
IC1501	CXA2069Q	IC		D1667	MA111-X	SI DIODE	
IC1502	M62320FP-X	IC		D1668	MA111-X	SI DIODE	
IC1511	PQ033RD01SZ	IC		D1669	MA111-X	SI DIODE	
IC1641	NJM2150AM-X	IC		D1702	MA111-X	SI DIODE	
IC1661	AN5277	IC		D1703	MA111-X	SI DIODE	
IC1703	AT24C128-56P585	IC	(SERVICE)	D1704	MA8100/M/-X	Z DIODE	
IC1802	BA033T	REGULATOR IC		D1705	MA8100/M/-X	Z DIODE	
IC1941	PQ1CG21H2FZ	IC		D1712	MA111-X	SI DIODE	
IC1942	SI-8050JD-W	IC		D1802	MA111-X	SI DIODE	
IC1943	PQ1CY1032Z-W	IC		D1895	MA8082/M/-X	Z DIODE	
IC1981	PQ070XZ01Z-X	IC		D1896	MA8082/M/-X	Z DIODE	
IC1991	PQ12RD11	IC		D1897	MA8051/M/-X	Z DIODE	
IC1993	MM1565AF-X	IC		D1898	MA8051/M/-X	Z DIODE	
IC3001	MN82832	IC		D1947	EC31QS04-X	SB DIODE	
IC3002	R1170H331B-X	IC		D1948	EC31QS04-X	SB DIODE	
IC6001	NJM2701M-X	IC		D1949	EC31QS04-X	SB DIODE	
				D1962	MA3030/H/-X	Z DIODE	
Q0701	2SK2090-X	MOS FET		D1964	MA111-X	SI DIODE	
Q0702	2SK2090-X	MOS FET		D1965	MA111-X	SI DIODE	
Q1101	2SA1530A/QR/-X	TRANSISTOR		D1967	PTZ6.8B-X	Z DIODE	
Q1102	2SC3928A/QR/-X	TRANSISTOR		D1968	PTZ3.9B-X	Z DIODE	
Q1232	2SA1530A/QR/-X	TRANSISTOR		D1969	PTZ11B-X	Z DIODE	
Q1252	2SA1530A/QR/-X	TRANSISTOR		D1981	MA111-X	SI DIODE	
Q1253	2SC3928A/QR/-X	TRANSISTOR		D1991	MA111-X	SI DIODE	
Q1254	2SA1530A/QR/-X	TRANSISTOR		D1993	MA111-X	SI DIODE	
Q1255	2SC3928A/QR/-X	TRANSISTOR		D2101	MA8100/M/-X	Z DIODE	
Q1301	2SC3837K/NP/-X	TRANSISTOR		D2121	MA8100/M/-X	Z DIODE	
Q1302	2SC3837K/NP/-X	TRANSISTOR		D2201	MA8100/M/-X	Z DIODE	
Q1303	2SC3837K/NP/-X	TRANSISTOR		D2204	MA8100/M/-X	Z DIODE	
Q1401	2SC3928A/QR/-X	TRANSISTOR		D2205	MA8100/M/-X	Z DIODE	
Q1511	2SC3928A/QR/-X	TRANSISTOR		D2206	MA8100/M/-X	Z DIODE	
Q1531	2SC3928A/QR/-X	TRANSISTOR		D2209	MA8100/M/-X	Z DIODE	
Q1668	UN2213-X	DIGI TRANSISTOR		D2210	MA8100/M/-X	Z DIODE	
Q1669	2SC3928A/QR/-X	TRANSISTOR		D2212	MA8100/M/-X	Z DIODE	
Q1671	UN2213-X	DIGI TRANSISTOR		D2213	MA8100/M/-X	Z DIODE	
Q1672	2SC3928A/QR/-X	TRANSISTOR		D2215	MA8100/M/-X	Z DIODE	
Q1673	2SA1530A/QR/-X	TRANSISTOR		D2216	MA8100/M/-X	Z DIODE	
Q1674	2SC3928A/QR/-X	TRANSISTOR		D2217	MA8100/M/-X	Z DIODE	
Q1712	2SA1530A/QR/-X	TRANSISTOR		D2218	MA8100/M/-X	Z DIODE	
Q1713	2SC2785/JH/-T	SI TRANSISTOR		D2219	MA8100/M/-X	Z DIODE	
Q1714	2SA1530A/QR/-X	TRANSISTOR		D2401	MA8100/M/-X	Z DIODE	
Q1961	2SC3928A/QR/-X	TRANSISTOR		D2402	MA8100/M/-X	Z DIODE	
Q1962	2SC3928A/QR/-X	TRANSISTOR		D2403	MA8100/M/-X	Z DIODE	
Q1964	2SC3928A/QR/-X	TRANSISTOR		D2404	MA8100/M/-X	Z DIODE	
Q1965	UN2213-X	DIGI TRANSISTOR		D2406	MA8100/M/-X	Z DIODE	
Q1966	UN2213-X	DIGI TRANSISTOR		D2421	MA8100/M/-X	Z DIODE	
Q1967	UN2213-X	DIGI TRANSISTOR		D2422	MA8100/M/-X	Z DIODE	
Q1981	2SC4682-T	TRANSISTOR		C1101	QETN1CM-477Z	E CAPACITOR	470uF 16V M
Q1984	2SC4682-T	TRANSISTOR		C1102	QETN1CM-107Z	E CAPACITOR	100uF 16V M
Q3001	2SC3928A/QR/-X	TRANSISTOR		C1103	QETN1HM-106Z	E CAPACITOR	10uF 50V M
Q3002	2SC3928A/QR/-X	TRANSISTOR		C1111	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
Q3003	2SA1530A/QR/-X	TRANSISTOR		C1140	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
Q3004	2SC3928A/QR/-X	TRANSISTOR		C1141	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
Q3005	2SC3928A/QR/-X	TRANSISTOR		C1144	QETN1HM-106Z	E CAPACITOR	10uF 50V M
Q3006	2SA1530A/QR/-X	TRANSISTOR		C1145	NCB31HK-223X	C CAPACITOR	0.022uF 50V K
Q3007	2SA1530A/QR/-X	TRANSISTOR		C1146	NCB31HK-472X	C CAPACITOR	4700pF 50V K
Q3501	2SA1530A/QR/-X	TRANSISTOR		C1147	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
Q3502	2SC3928A/QR/-X	TRANSISTOR		C1148	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
Q3505	2SA1530A/QR/-X	TRANSISTOR		C1149	NCB31HK-472X	C CAPACITOR	4700pF 50V K
Q3506	2SC3928A/QR/-X	TRANSISTOR		C1150	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
Q3509	2SA1530A/QR/-X	TRANSISTOR		C1151	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
Q3510	2SC3928A/QR/-X	TRANSISTOR		C1152	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
Q6001	2SC3928A/QR/-X	TRANSISTOR		C1153	NCB31HK-562X	C CAPACITOR	5600pF 50V K
Q6002	2SC3928A/QR/-X	TRANSISTOR		C1154	NCB31HK-123X	C CAPACITOR	0.012uF 50V K
				C1155	QETN1HM-105Z	E CAPACITOR	1uF 50V M
				C1156	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
D1093	MA8082/M/-X	Z DIODE		C1157	QETN1HM-106Z	E CAPACITOR	10uF 50V M
D1140	MA8100/M/-X	Z DIODE		C1158	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
D1141	MA8100/M/-X	Z DIODE		C1159	QETN1CM-107Z	E CAPACITOR	100uF 16V M
D1145	MA8082/M/-X	Z DIODE		C1160	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
D1146	MA8082/M/-X	Z DIODE		C1161	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
D1251	MA8100/M/-X	Z DIODE		C1162	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
D1252	MA8100/M/-X	Z DIODE		C1163	NCB31HK-272X	C CAPACITOR	2700pF 50V K
D1253	MA111-X	SI DIODE		C1164	NCB31HK-473X	C CAPACITOR	0.047uF 50V K
D1301	MA8100/M/-X	Z DIODE		C1165	QETN1HM-335Z	E CAPACITOR	3.3uF 50V M
D1302	MA8100/M/-X	Z DIODE		C1166	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
D1305	MA8100/M/-X	Z DIODE		C1167	QETN1HM-106Z	E CAPACITOR	10uF 50V M
D1306	MA8100/M/-X	Z DIODE		C1168	QETN1HM-105Z	E CAPACITOR	1uF 50V M

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
C1169	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	C1652	NCB31CK-153X	C CAPACITOR	0.015uF 16V K
C1170	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	C1653	NCB31CK-473X	C CAPACITOR	0.047uF 16V K
C1171	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C1667	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1172	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C1668	NDC31HJ-101X	C CAPACITOR	100pF 50V J
C1213	QETN1CM-107Z	E CAPACITOR	100uF 16V M	C1669	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1214	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	C1670	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1215	QFLC1HJ-103Z	M CAPACITOR	0.01uF 50V J	C1671	NDC31HJ-101X	C CAPACITOR	100pF 50V J
C1216	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	C1672	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1218	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1673	QETN1HM-477Z	E CAPACITOR	470uF 50V M
C1219	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	C1674	QETM1HM-108	E CAPACITOR	1000uF 50V M
C1233	NDC31HJ-180X	C CAPACITOR	18pF 50V J	C1675	QFV21HJ-124Z	MF CAPACITOR	0.12uF 50V J
C1257	QETN1HM-105Z	E CAPACITOR	1uF 50V M	C1676	QFV21HJ-124Z	MF CAPACITOR	0.12uF 50V J
C1258	QETN1HM-105Z	E CAPACITOR	1uF 50V M	C1677	QETN1EM-108Z	E CAPACITOR	1000uF 25V M
C1301	QETN1CM-107Z	E CAPACITOR	100uF 16V M	C1678	QETN1EM-108Z	E CAPACITOR	1000uF 25V M
C1302	QETN1CM-107Z	E CAPACITOR	100uF 16V M	C1679	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C1303	QETN1CM-107Z	E CAPACITOR	100uF 16V M	C1680	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M
C1304	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C1696	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1305	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C1697	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C1306	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C1702	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1307	QETN1CM-106Z	E CAPACITOR	10uF 16V M	C1712	QETN1AM-227Z	E CAPACITOR	220uF 10V M
C1308	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1806	QETN1VM-476Z	E CAPACITOR	47uF 35V M
C1309	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1807	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C1311	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1941	QETN1VM-477Z	E CAPACITOR	470uF 35V M
C1312	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1942	QETN1CM-108Z	E CAPACITOR	1000uF 16V M
C1313	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1943	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C1322	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1944	QETN1VM-477Z	E CAPACITOR	470uF 35V M
C1323	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1945	QEZO256-128	E CAPACITOR	1200uF 10V M
C1324	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1946	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C1325	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1947	QETN1CM-477Z	E CAPACITOR	470uF 16V M
C1326	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C1948	QETN1CM-477Z	E CAPACITOR	470uF 16V M
C1327	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C1949	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M
C1328	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C1950	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M
C1329	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1951	QETN1VM-477Z	E CAPACITOR	470uF 35V M
C1331	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1952	QEZO256-128	E CAPACITOR	1200uF 10V M
C1332	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1953	QETN0JM-228Z	E CAPACITOR	2200uF 6.3V M
C1333	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1955	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C1341	NCB21CK-105X	C CAPACITOR	1uF 16V K	C1961	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C1342	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1981	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C1343	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1984	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M
C1351	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1985	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M
C1352	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1991	QETN1EM-107Z	E CAPACITOR	100uF 25V M
C1353	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1992	QETN1CM-477Z	E CAPACITOR	470uF 16V M
C1354	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1994	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1355	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1995	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1371	QETN1CM-336Z	E CAPACITOR	33uF 16V M	C1996	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1372	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C2102	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1381	QETN1CM-336Z	E CAPACITOR	33uF 16V M	C2103	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1382	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C2104	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1391	QETN1CM-336Z	E CAPACITOR	33uF 16V M	C2105	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1392	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C2106	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1403	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	C2123	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1404	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	C2124	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1405	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	C2126	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1406	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	C2127	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1409	QETN1HM-106Z	E CAPACITOR	10uF 50V M	C2128	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1410	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C2144	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C2145	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1412	QETN1CM-107Z	E CAPACITOR	100uF 16V M	C2146	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C1415	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C2302	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1416	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C2303	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1417	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C2322	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1418	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C2323	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1421	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	C2341	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1423	QETN1HM-476Z	E CAPACITOR	47uF 50V M	C2342	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1442	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C2343	NCB21CK-105X	C CAPACITOR	1uF 16V K
C1501	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C3001	QENC1AM-336Z	BP E CAPACITOR	33uF 10V M
C1502	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C3002	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C1510	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M	C3003	NDC31HJ-121X	C CAPACITOR	120pF 50V J
C1519	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C3004	NDC31HJ-150X	C CAPACITOR	15pF 50V J
C1531	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C3005	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z
C1532	QETN1HM-226Z	E CAPACITOR	22uF 50V M	C3006	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1539	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	C3007	NCB31AK-334X	C CAPACITOR	0.33uF 10V K
C1540	QETN1AM-107Z	E CAPACITOR	100uF 10V M	C3008	NDC31HJ-151X	C CAPACITOR	150pF 50V J
C1553	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C3009	NDC31HJ-121X	C CAPACITOR	120pF 50V J
C1554	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C3010	NDC31HJ-150X	C CAPACITOR	15pF 50V J
C1555	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C3011	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z
C1556	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C3012	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1557	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C3013	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1579	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C3014	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C1641	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M	C3015	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1642	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	C3016	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1643	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	C3017	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M
C1645	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C3018	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C1646	QETN1EM-476Z	E CAPACITOR	47uF 25V M	C3019	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1647	QETN1HM-226Z	E CAPACITOR	22uF 50V M	C3020	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1648	QETN1HM-106Z	E CAPACITOR	10uF 50V M	C3021	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1651	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M	C3022	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
C3023	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R0705	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3024	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R0706	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3025	QETN1CM-106Z	E CAPACITOR	10uF 16V M	R1097	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C3026	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1104	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3027	NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	R1105	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3028	NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	R1107	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
C3029	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1110	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3030	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1111	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J
C3031	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1112	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3032	NDC31HJ-560X	C CAPACITOR	56pF 50V J	R1140	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J
C3033	NDC31HJ-330X	C CAPACITOR	33pF 50V J	R1141	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3034	NDC31HJ-560X	C CAPACITOR	56pF 50V J	R1142	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3035	NDC31HJ-330X	C CAPACITOR	33pF 50V J	R1143	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J
C3036	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1144	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
C3037	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1145	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
C3038	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1146	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
C3039	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1147	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J
C3041	QETN1CM-106Z	E CAPACITOR	10uF 16V M	R1149	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3042	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1151	NRSA63J-302X	MG RESISTOR	3kΩ 1/16W J
C3044	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1152	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
C3045	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1157	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3046	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1158	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3047	QETN1CM-106Z	E CAPACITOR	10uF 16V M	R1202	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3048	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1203	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3049	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1218	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J
C3050	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1219	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C3051	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1220	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3052	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1221	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3053	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1226	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3054	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1228	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C3055	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1229	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3056	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1230	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3057	QETN1CM-106Z	E CAPACITOR	10uF 16V M	R1231	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3058	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1232	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C3059	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1234	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C3060	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1236	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C3061	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1240	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3062	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1261	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C3063	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1262	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C3064	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1265	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3065	QETN1CM-106Z	E CAPACITOR	10uF 16V M	R1266	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3066	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1267	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
C3067	QETN1CM-476Z	E CAPACITOR	47uF 16V M	R1268	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C3068	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R1269	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3069	QETN1CM-476Z	E CAPACITOR	47uF 16V M	R1272	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C3070	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R1282	QRE141J-221Y	C RESISTOR	220Ω 1/4W J
C3071	QETN1CM-476Z	E CAPACITOR	47uF 16V M	R1283	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
C3072	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1284	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3077	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	R1285	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
C3078	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1286	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C3079	NDC31HJ-470X	C CAPACITOR	47pF 50V J	R1287	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J
C3080	QBTC1CK-106Z	TA E CAPACITOR	10uF 16V K	R1301	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3082	NDC31HJ-151X	C CAPACITOR	150pF 50V J	R1302	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3086	NCB31HK-152X	C CAPACITOR	1500pF 50V K	R1337	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
C3088	NDC31HJ-100X	C CAPACITOR	10pF 50V J	R1347	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
C3089	NDC31HJ-100X	C CAPACITOR	10pF 50V J	R1372	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3090	NDC31HJ-100X	C CAPACITOR	10pF 50V J	R1374	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C3099	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1375	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C3100	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1378	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3501	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1382	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3502	NDC31HJ-101X	C CAPACITOR	100pF 50V J	R1384	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C3503	NDC31HJ-121X	C CAPACITOR	120pF 50V J	R1385	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C3504	NDC31HJ-150X	C CAPACITOR	15pF 50V J	R1392	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3506	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	R1394	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C3507	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1395	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C3508	NDC31HJ-101X	C CAPACITOR	100pF 50V J	R1401	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3509	NDC31HJ-121X	C CAPACITOR	120pF 50V J	R1402	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3510	NDC31HJ-150X	C CAPACITOR	15pF 50V J	R1421	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J
C3512	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	R1422	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3513	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R1423	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3514	NDC31HJ-101X	C CAPACITOR	100pF 50V J	R1501	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
C3515	NDC31HJ-121X	C CAPACITOR	120pF 50V J	R1502	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
C3516	NDC31HJ-150X	C CAPACITOR	15pF 50V J	R1505	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C3518	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	R1511	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C3519	QENC1CM-336Z	BP E CAPACITOR	33uF 16V M	R1513	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3520	QENC1CM-336Z	BP E CAPACITOR	33uF 16V M	R1514	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C3521	QENC1CM-336Z	BP E CAPACITOR	33uF 16V M	R1515	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C6001	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M	R1516	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C6002	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M	R1517	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C6003	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1518	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C6004	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1519	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C6005	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1520	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C6006	NCB31CK-273X	C CAPACITOR	0.027uF 16V K	R1521	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C6007	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1522	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C6008	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1523	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
C6009	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R1524	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C6010	QETN1HM-106Z	E CAPACITOR	10uF 50V M				

△Ref No.	Part No.	Part Name	Description Local	△Ref No.	Part No.	Part Name	Description Local
R1525	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R1971	QRT039J-R68	MF RESISTOR	0.68Ω 3W J
R1526	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R1975	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1527	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R1978	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1528	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	△R1981	QRK126J-181X	UNF C RESISTOR	180Ω 1/2W J
R1529	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R1982	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D
R1530	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R1983	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D
R1533	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R1984	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J
R1534	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R1985	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R1535	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	△R1986	QRK126J-331X	UNF C RESISTOR	330Ω 1/2W J
R1536	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R1991	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R1537	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R1992	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R1538	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R2102	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1539	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R2103	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1560	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R2104	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1562	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R2105	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1571	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R2106	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1577	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R2122	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1578	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R2123	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1579	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R2125	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1611	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R2126	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1612	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R2127	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1613	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R2144	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1614	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	R2145	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1615	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R2146	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
R1616	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	R2305	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1641	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R2308	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1642	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R2325	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1643	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R2328	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R1649	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R3001	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R1651	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3002	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R1652	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R3003	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1653	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R3004	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R1658	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R3005	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J
R1659	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R3006	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R1665	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R3007	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1666	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R3009	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D
R1667	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R3010	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R1668	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R3012	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R1669	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R3013	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
R1670	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R3014	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1671	QRJ146J-2R2X	UNF C RESISTOR	2.2Ω 1/4W J	R3015	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R1672	QRJ146J-2R2X	UNF C RESISTOR	2.2Ω 1/4W J	R3016	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J
R1673	QRK126J-102X	UNF C RESISTOR	1kΩ 1/2W J	R3017	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R1674	QRK126J-102X	UNF C RESISTOR	1kΩ 1/2W J	R3018	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1680	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	R3020	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D
R1681	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R3021	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R1682	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R3023	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R1691	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	R3024	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R1694	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	R3025	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R1695	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R3026	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R1696	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R3027	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R1697	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R3028	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R1701	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R3029	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R1702	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R3030	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R1703	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R3039	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1712	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	R3040	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1713	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	R3042	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R1714	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	R3045	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1715	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R3047	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R1716	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3048	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R1718	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R3049	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R1895	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R3050	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
R1896	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R3051	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R1897	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R3052	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R1898	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R3053	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J
R1899	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R3054	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R1900	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R3055	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R1942	NRSA63D-122X	MG RESISTOR	1.2kΩ 1/16W D	R3058	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1943	NRSA63D-123X	MG RESISTOR	12kΩ 1/16W D	R3059	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
△R1944	QRK126J-220X	UNF C RESISTOR	22Ω 1/2W J	R3060	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R1945	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3065	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1946	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3066	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1949	NRSA63D-122X	MG RESISTOR	1.2kΩ 1/16W D	R3502	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1950	NRSA63D-822X	MG RESISTOR	8.2kΩ 1/16W D	R3503	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R1952	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	R3504	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J
R1953	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	R3505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R1957	NRSA63D-682X	MG RESISTOR	6.8kΩ 1/16W D	R3507	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1959	NRSA63D-182X	MG RESISTOR	1.8kΩ 1/16W D	R3508	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R1961	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3509	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R1962	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	R3511	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R1963	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	R3516	NRSA63J-680X	MG RESISTOR	68Ω 1/16W J
R1964	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R3518	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1965	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3519	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R1966	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	R3520	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J
R1967	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	R3521	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R1968	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3523	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1969	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R3525	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J

△Ref No.	Part No.	Part Name	Description	Local
R3532	NRSA63J-680X	MG RESISTOR	68Ω	1/16W J
R3534	NRSA63J-101X	MG RESISTOR	100Ω	1/16W J
R3535	NRSA63J-182X	MG RESISTOR	1.8kΩ	1/16W J
R3536	NRSA63J-181X	MG RESISTOR	180Ω	1/16W J
R3537	NRSA63J-103X	MG RESISTOR	10kΩ	1/16W J
R3539	NRSA63J-101X	MG RESISTOR	100Ω	1/16W J
R3541	NRSA63J-222X	MG RESISTOR	2.2kΩ	1/16W J
R3548	NRSA63J-680X	MG RESISTOR	68Ω	1/16W J
R3549	NRSA63J-223X	MG RESISTOR	22kΩ	1/16W J
R3550	NRSA63J-223X	MG RESISTOR	22kΩ	1/16W J
R3551	NRSA63J-0R0X	MG RESISTOR	0Ω	1/16W J
R3552	NRSA63J-223X	MG RESISTOR	22kΩ	1/16W J
R3553	NRSA63J-223X	MG RESISTOR	22kΩ	1/16W J
R3554	NRSA63J-223X	MG RESISTOR	22kΩ	1/16W J
R3555	NRSA63J-223X	MG RESISTOR	22kΩ	1/16W J
R6001	NRSA63J-103X	MG RESISTOR	10kΩ	1/16W J
R6002	NRSA63J-103X	MG RESISTOR	10kΩ	1/16W J
R6003	NRSA63J-102X	MG RESISTOR	1kΩ	1/16W J
R6004	NRSA63J-103X	MG RESISTOR	10kΩ	1/16W J
R6006	NRSA63J-102X	MG RESISTOR	1kΩ	1/16W J
R6007	NRSA63J-562X	MG RESISTOR	5.6kΩ	1/16W J
R6008	NRSA63J-473X	MG RESISTOR	47kΩ	1/16W J
R6009	NRSA63J-223X	MG RESISTOR	22kΩ	1/16W J
RA3001	NRZ0040-103X	NET RESISTOR	10kΩ	1/16W J
RA3002	NRZ0040-103X	NET RESISTOR	10kΩ	1/16W J
RA3003	NRZ0040-103X	NET RESISTOR	10kΩ	1/16W J
RA3004	NRZ0040-103X	NET RESISTOR	10kΩ	1/16W J
L1211	QQL244K-100Z	PEAKING COIL	10uH	K
L1401	QQL244K-100Z	PEAKING COIL	10uH	K
L1402	QQL26AK-100Z	CHOKE COIL	10uH	K
L1941	QQR1401-001	CHOKE COIL		
L1942	QQR1401-001	CHOKE COIL		
L1943	QQL26AK-330Z	CHOKE COIL	33uH	K
L1944	QQL26AK-330Z	CHOKE COIL	33uH	K
L1945	QQL26AK-220Z	CHOKE COIL	22uH	K
L1946	QQL26AK-220Z	CHOKE COIL	22uH	K
L1947	QQR1401-001	CHOKE COIL		
L1948	QQL26AK-100Z	CHOKE COIL	10uH	K
L1950	QQL26AK-470Z	CHOKE COIL	47uH	K
L1951	QQL26AK-470Z	CHOKE COIL	47uH	K
L1952	QQL26AK-470Z	CHOKE COIL	47uH	K
L1983	QRN143J-0R0X	C RESISTOR	0Ω	1/4W J
L3001	NQL092K-6R8X	COIL	6.8uH	K
L3002	NQL092K-6R8X	COIL	6.8uH	K
L3003	NQR0413-003X	FERRITE BEADS		
L3004	NQR0413-003X	FERRITE BEADS		
L3007	NRSA02J-0R0X	MG RESISTOR	0Ω	1/10W J
L3501	NQL092K-6R8X	COIL	6.8uH	K
L3502	NQL092K-6R8X	COIL	6.8uH	K
L3503	NQL092K-6R8X	COIL	6.8uH	K
CN1001	QGB1506L1-16	CONNECTOR	B-B	(1-16)
CN1002	QGB1506L1-16	CONNECTOR	B-B	(1-16)
CN1003	QGB1506L1-16	CONNECTOR	B-B	(1-16)
CN100Q	WJP0053-004A	E-SH C WIRE C-B		
CN10AU	WJP0052-002A	E-SH C WIRE C-B		
CN10DC	QJB003-043014	SIN ID C-B WIRE		
CN10SR	QJB003-052610	SIN ID C-B WIRE		
H1661	LC30145-003A	HEAT SINK/AL-F/		
H1802	CM42862-A0A	HEAT SINK ASSY		
J1091	QNS0242-001	3.5 JACK	AV COMPULINK	
J2101	QNN0628-001	PIN JACK	V/L IN	
J2102	QNN0629-001	PIN JACK	R IN/LR OUT/CENTER CH IN	
J2111	QND0121-001	S JACK	S IN	
J2121	QNN0638-001	PIN JACK	COMP-1/-2 IN	
K1943	QRN143J-0R0X	C RESISTOR	0Ω	1/4W J
K1944	QRN143J-0R0X	C RESISTOR	0Ω	1/4W J
LC1301	QQR1199-001	EMI FILTER		
LC1302	QQR1199-001	EMI FILTER		
LC1303	QQR1199-001	EMI FILTER		
LC2301	QQR1199-001	EMI FILTER		
LC2302	QQR1199-001	EMI FILTER		
LC2303	QQR1199-001	EMI FILTER		
LC2321	QQR1199-001	EMI FILTER		
LC2322	QQR1199-001	EMI FILTER		
LC2323	QQR1199-001	EMI FILTER		
LC2341	QQR1199-001	EMI FILTER		
LC2342	QQR1199-001	EMI FILTER		
LC2343	QQR1199-001	EMI FILTER		
LC3001	NQR0470-001X	EMI FILTER	22pF	50V +50%-20%
LC3002	NQR0470-001X	EMI FILTER	22pF	50V +50%-20%
LC3003	NQR0483-005X	EMI FILTER		
LC3004	NQR0470-003X	EMI FILTER	100pF	50V +50%-20%
LC3005	NQR0470-001X	EMI FILTER	22pF	50V +50%-20%
LC3006	NQR0470-003X	EMI FILTER	100pF	50V +50%-20%
LC3007	NQR0470-001X	EMI FILTER	22pF	50V +50%-20%

△Ref No.	Part No.	Part Name	Description	Local
LC3008	NQR0470-001X	EMI FILTER	22pF	50V +50%-20%
LC3501	NQR0470-003X	EMI FILTER	100pF	50V +50%-20%
LC3502	NQR0470-003X	EMI FILTER	100pF	50V +50%-20%
LC3503	NQR0470-003X	EMI FILTER	100pF	50V +50%-20%
SL1211	CSB503F30-T2	C RESONATOR		
△TU1101	QAU0352-001	TUNER		
X3001	NAX0570-001X	CRYSTAL	27.000MHz	

DEF / CONVERGENCE OUT P.W. BOARD ASS'Y (SRP-2002A-M2)

REFER TO PARTS LIST IN PAGE 3-11 FOR THIS P.W. BOARD.

R CRT SOCKET P.W. BOARD ASS'Y (SRP-3101A-M2)

REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD.

G CRT SOCKET P.W. BOARD ASS'Y (SRP-3201A-M2)

REFER TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD.

B CRT SOCKET P.W. BOARD ASS'Y (SRP-3301A-M2)

REFER TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD.

VM P.W. BOARD ASS'Y (SRP-7201A-M2)

REFER TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD.

REMOCON SENSOR P.W. BOARD ASS'Y (SRP-8001A-M2)

REFER TO PARTS LIST IN PAGE 3-15 FOR THIS P.W. BOARD.

POWER P.W. BOARD ASS'Y (SRP-9001A-M2)

REFER TO PARTS LIST IN PAGE 3-15 FOR THIS P.W. BOARD.

FRONT CONTROL P.W. BOARD ASS'Y (SRP0L001A-M2)

REFER TO PARTS LIST IN PAGE 3-16 FOR THIS P.W. BOARD.

DIGITAL INPUT MODULE P.W. BOARD ASS'Y (SRP-7802A-M2)

△Ref No.	Part No.	Part Name	Description	Local
	SRP-7802A-M2	DIGITAL INPUT MODULE PWB		

DIGITAL CONVERGENCE MODULE P.W. BOARD ASS'Y (SRP0K002A-M2)

REFER TO PARTS LIST IN PAGE 3-21 FOR THIS P.W. BOARD.


MI-CON & DIST MODULE P.W. BOARD ASS'Y (SRP0D001A-M2)

REFER TO PARTS LIST IN PAGE 3-16 FOR THIS P.W. BOARD.

REMOTE CONTROL UNIT PARTS LIST (RM-C1257G-1H)

△ Ref.No.	Part No.	Part Name	Description	Local
	UR77EC0603	BATTERY COVER		

PACKING

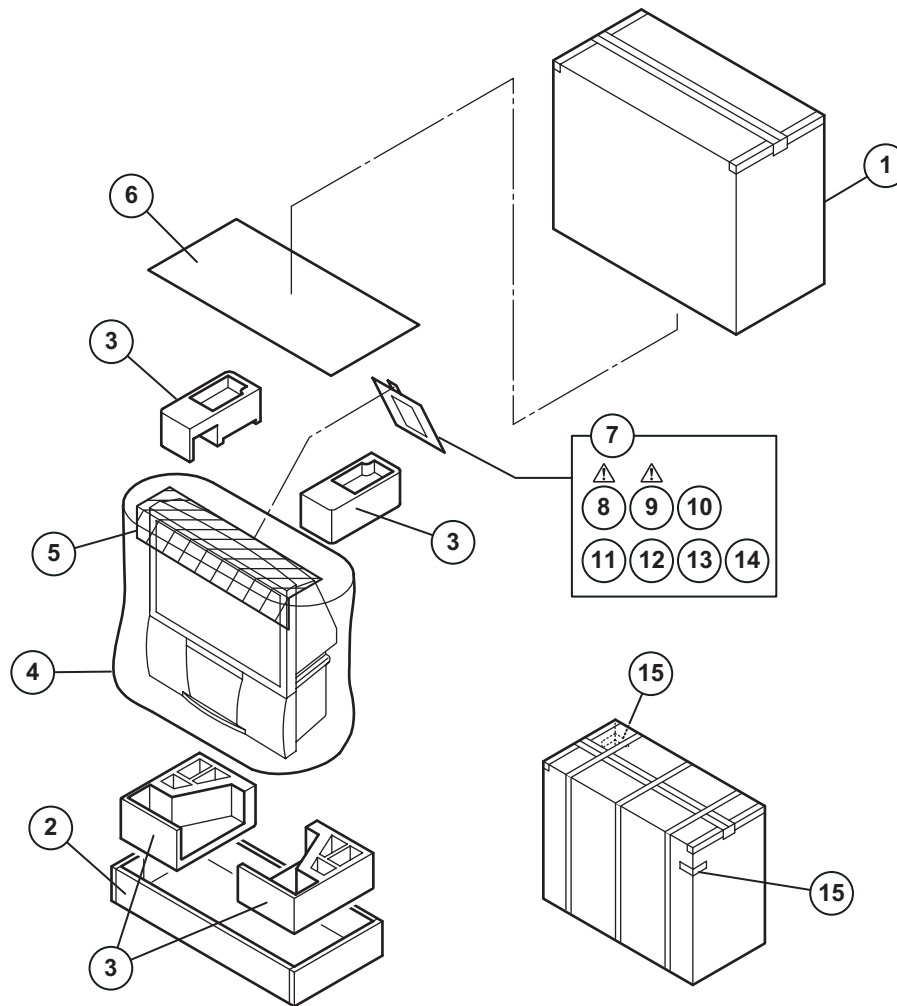

PACKING PARTS LIST

△ Ref.No.	Part No.	Part Name	Description	Local
1	LC11253-004A-A	PACKING CASE (TOP)		AV-48P575/H
1	LC11253-005A-A	PACKING CASE (TOP)		AV-56P575/H, AV-56P585/H
2	LC31759-001C-A	PACKING CASE (BOTTOM)		AV-48P575/H
2	LC31759-002B-A	PACKING CASE (BOTTOM)		AV-56P575/H, AV-56P585/H
3	LC11790-002B-A	CUSHION ASSY	4pcs in 1set	AV-48P575/H
3	LC11811-002B-A	CUSHION ASSY	4pcs in 1set	AV-56P575/H, AV-56P585/H
4	CP30056-010-A	POLY BAG		AV-48P575/H
4	CP30056-011-A	POLY BAG		AV-56P575/H, AV-56P585/H
5	CP30055-007-A	TOP COVER		
6	GQ30053-001A-A	TOP SHEET		AV-48P575/H
7	QPA02503505	POLY BAG	25cm x 35cm	
△ 8	LCT1609-001A-A	INST BOOK	English	
△ 9	LCT1610-001A-A	INST BOOK	French	
10	GQ40028-001A-A	INSERT SHEET		
11	BT-51034-1Q	REGIST. CARD		
12	BT-52006-2Q	WARRANTY CARD		
13	RM-C1257G-1H	REMOCON		
14	-----	BATTERY	R6P/AA	
15	GQ30037-001A-A	CORNER LABEL	2pcs in 1set	