

# PARTS LIST

## CAUTION

- The parts identified by the  $\Delta$  symbol are important for the safety . Whenever replacing these parts, be sure to use specified ones to secure the safety.
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied.
- P. W. Board Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied.

### ABBREVIATIONS OF RESISTORS, CAPACITORS AND TOLERANCES

RESISTORS		CAPACITORS	
CR	Carbon Resistor	C CAP.	Ceramic Capacitor
FR	Fusible Resistor	E CAP.	Electrolytic Capacitor
PR	Plate Resistor	M CAP.	Mylar Capacitor
VR	Variable Resistor	CH CAP.	Chip Capacitor
HV R	High Voltage Resistor	HV CAP.	High Voltage Capacitor
MF R	Metal Film Resistor	MF CAP.	Metalized Film Capacitor
MG R	Metal Glazed Resistor	MM CAP.	Metalized Mylar Capacitor
MP R	Metal Plate Resistor	MP CAP.	Metalized Polystyrol Capacitor
OM R	Metal Oxide Film Resistor	PP CAP.	Polypropylene Capacitor
CMF R	Coating Metal Film Resistor	PS CAP.	Polystyrol Capacitor
UNF R	Non-Flammable Resistor	TF CAP.	Thin Film Capacitor
CH V R	Chip Variable Resistor	MPP CAP.	Metalized Polypropylene Capacitor
CH MG R	Chip Metal Glazed Resistor	TAN. CAP.	Tantalum Capacitor
COMP. R	Composition Resistor	CH C CAP.	Chip Ceramic Capacitor
LPTC R	Linear Positive Temperature Coefficient Resistor	BP E CAP.	Bi-Polar Electrolytic Capacitor
		CH AL E CAP.	Chip Aluminum Electrolytic Capacitor
		CH AL BP CAP.	Chip Aluminum Bi-Polar Capacitor
		CH TAN. E CAP.	Chip Tantalum Electrolytic Capacitor
		CH AL BP E CAP.	Chip Tantalum Bi-Polar Electrolytic Capacitor

RESISTORS									
F	G	J	K	M	N	R	H	Z	P
$\pm 1\%$	$\pm 2\%$	$\pm 5\%$	$\pm 10\%$	$\pm 20\%$	$\pm 30\%$	+30% -10%	+50% -10%	+80% -20%	+100% -0%

CONTENTS

EXPLODED VIEW PARTS LIST - 1 ..... 3-2

EXPLODED VIEW - 1 ..... 3-3

EXPLODED VIEW PARTS LIST - 2 ..... 3-4

EXPLODED VIEW - 2 ..... 3-4

PRINTED WIRING BOARD PARTS LIST ..... 3-6

MAIN PW BOARD ASS'Y (SSB-1070A-M2) [AV-48WP74] (SSB-1069A-M2) [AV-56WP74] ..... 3-6

POWER & DEF PW BOARD ASS'Y (SSB-2070A-M2) [AV-48WP74] (SSB-2069A-M2) [AV-56WP74] ..... 3-10

R CRT SOCKET PW BOARD ASS'Y (SSB-3168A-M2) ..... 3-12

G CRT SOCKET PW BOARD ASS'Y (SSB-3268A-M2) ..... 3-12

B CRT SOCKET PW BOARD ASS'Y (SSB-3368A-M2) ..... 3-13

CONVERGENCE OUT PW BOARD ASS'Y (SSB-5068A-M2) ..... 3-13

VM PW BOARD ASS'Y (SSB-7268A-M2) ..... 3-14

REMOCON SENSOR PW BOARD ASS'Y (SSB-8068A-M2) ..... 3-14

LINE FILTER PW BOARD ASS'Y (SSB-9068A-M2) ..... 3-14

DEF OSC PW BOARD ASS'Y (SSB0H068A-M2) ..... 3-14

RECEIVER PW BOARD ASS'Y (SSB0R368A-M2) ..... 3-16

FRONT CONTROL PW BOARD ASS'Y (SSB0L068A-M2) ..... 3-17

FRONT RELAY PW BOARD ASS'Y (SSB0L268A-M2) ..... 3-18

DIGITAL INPUT MODULE PW BOARD ASS'Y (48WP74CP-S) [AV-48WP74] (56WP74CP-S) [AV-56WP74] ..... 3-18

DIGITAL CONVERGENCE MODULE PW BOARD ASS'Y (SSB0K070A-M2) [AV-48WP74] (SSB0K069A-M2) [AV-56WP74] ..... 3-18

MI-COM & DIST MODULE PW BOARD ASS'Y (SSB0D070A-M2) [AV-48WP74] (SSB0D069A-M2) [AV-56WP74] ..... 3-18

REMOTE CONTROL UNIT PARTS LIST (RM-C1200G-1H) ..... 3-18


PACKING ..... 3-19

PACKING PARTS LIST ..... 3-19

EXPLODED VIEW PARTS LIST - 1

△	Ref.No.	Part No.	Part Name	Description	Local
△	1	48WP74SCSAM2	SCREEN ASSY		AV-48WP74
△	1	56WP74SCSAM2	SCREEN ASSY		AV-56WP74
△	2	LC11247-001C-A	BACK COVER		AV-48WP74
△	2	LC11407-001C-A	BACK COVER		AV-56WP74
	4	QYSBSF4012Z	TAP SCREW	4mm x 12mm(x2)	
	5	LC31752-001A-A	MIRROR BRACKET	(x2)	AV-48WP74
	5	LC41419-001A-A	MIRROR BRACKET	(x2)	AV-56WP74
	6	QYSBSF4012Z	TAP SCREW	4mm x 12mm(x2)	AV-56WP74
	8	QYSBSAG4018M	TAP SCREW	4mm x 18mm(x2)	
	16	LC41237-001A	RUBBER CATCH	(x4)	AV-48WP74
	16	LC41237-001A	RUBBER CATCH	(x6)	AV-56WP74
	17	QYSBSFG4016M	TAP SCREW	4mm x 16mm(x10)	
	18	QYSBSFG4016M	TAP SCREW	4mm x 16mm(x3)	
	19	QYSBSF4012Z	TAP SCREW	4mm x 12mm(x2)	
	20	QYSBSA4012M	TAP SCREW	4mm x 12mm(x2)	
	21	QYSBSAG4018M	TAP SCREW	4mm x 18mm(x2)	
	23	LC31733-001A-A	MIRROR		AV-48WP74
	23	LC31954-001A-A	MIRROR		AV-56WP74
△	24	LC11251-001D-A	SPEAKER GRILL		AV-48WP74
△	24	LC11406-002A-A	SPEAKER GRILL		AV-56WP74
△	25	LC11248-001C-A	BODY		AV-48WP74
△	25	LC11408-001A-A	BODY		AV-56WP74
△	26	LC20982-003A-A	BACK BOARD		
△	27	LC31757-002A-A	FRONT BOARD		
	28	QAS0104-001	SPEAKER	SP01 SP02(x2)	AV-48WP74
	28	QAS0134-001	SPEAKER	SP01 SP02(x2)	AV-56WP74
	29	QAS0105-001	SPEAKER	SP03 SP04(x2)	AV-48WP74
	29	QAS0133-001	SPEAKER	SP03 SP04(x2)	AV-56WP74
	30	QYSBSA4012M	TAP SCREW	4mm x 12mm(x12)	
	31	LC31756-001A-A	BC FITTING	(x2)	
	32	CM22765-001-A	COOLANT PAN		
△	33	LC31139-001A-A	RATING LABEL		
	34	LC41424-001A-A	HDCP WARNING		
	35	QYSBSFG4020M	TAP SCREW	4mm x 20mm(x4)	
	36	QYSBSAG4018M	TAP SCREW	4mm x 18mm(x4)	
	37	QYSBSFG4016M	TAP SCREW	4mm x 16mm(x4)	
	39	QYSDSA4015Z	SCREW	4mm x 15mm(x4)	
	40	QYSBSAG4018M	TAP SCREW	4mm x 18mm(x4)	
	41	CM47752-006	BRAND MARK		AV-48WP74
	41	CM47752-004	BRAND MARK		AV-56WP74
	42	QYSPSPD4020Z	SCREW	4mm x 20mm(x2)	
	43	QYSBSF4012Z	TAP SCREW	4mm x 12mm(x2)	
△	44	LC11245-001D-A	FRONT PANEL		AV-48WP74
△	44	LC11405-003A-A	FRONT PANEL		AV-56WP74
△	45	LC31737-001A-A	SC SHIELD 48		AV-48WP74
△	45	LC31949-001A-A	SC SHIELD 56		AV-56WP74
△	46	LC31744-001A-A	SCREEN LENTI		AV-48WP74
△	46	LC31950-001A-A	SCREEN LENTI		AV-56WP74
△	47	LC31745-001A-A	SCREEN FRESNEL		AV-48WP74
△	47	LC31951-001A-A	SCREEN FRESNEL		AV-56WP74


## EXPLODED VIEW - 1

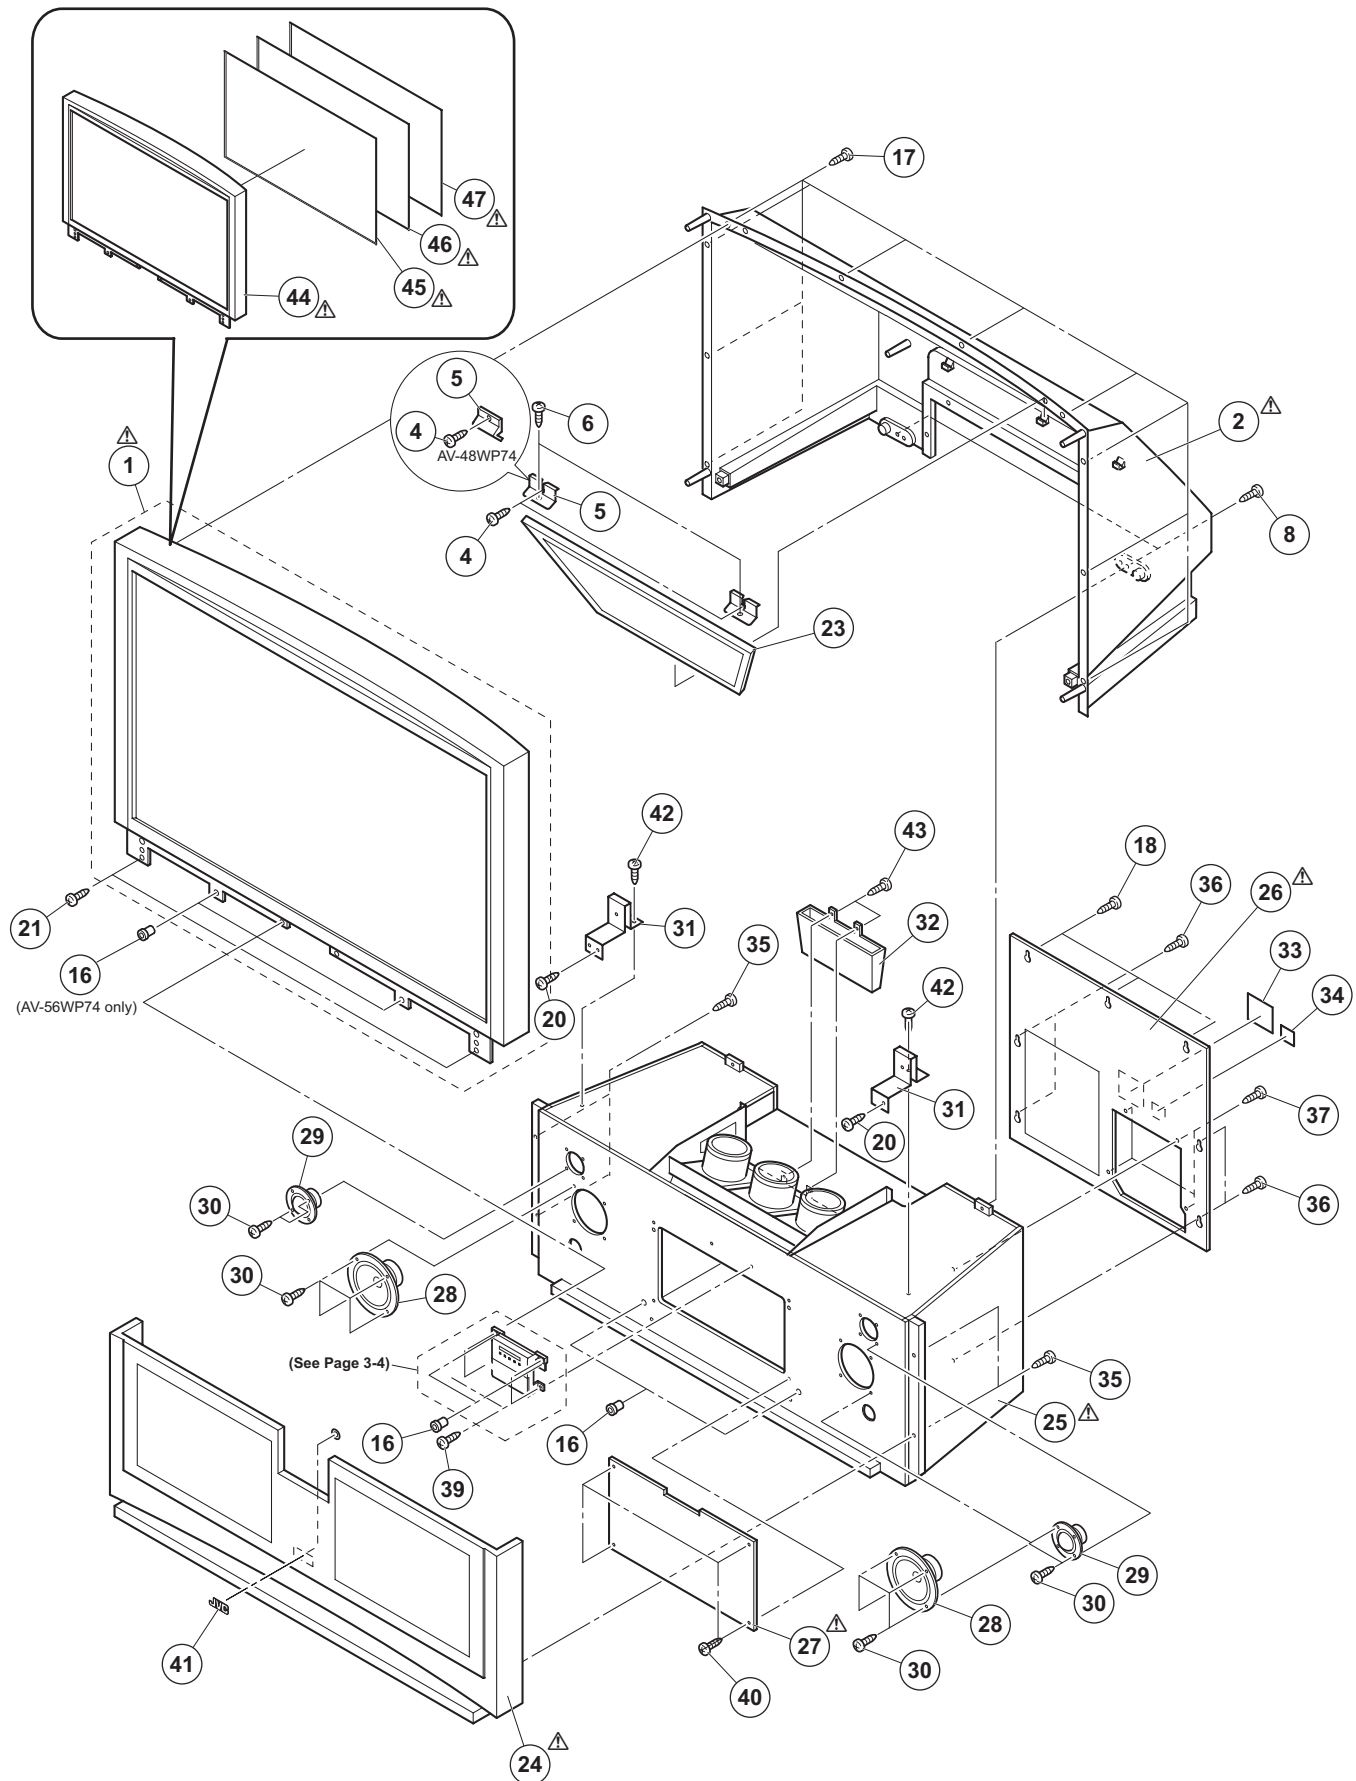


EXPLODED VIEW PARTS LIST - 2

△	Ref.No.	Part No.	Part Name	Description	Local
	9	LC31829-001C-A	DOOR		
	10	QYSBSF3012M	TAP SCREW	3mm x 12mm(x2)	
	11	QYSBSF3012M	TAP SCREW	3mm x 12mm(x3)	
	12	LC31883-003A-A	CONTROL PANEL		
	13	LC31749-001A-A	LED LENS		
	14	LC31751-001B-A	KNOB		AV-48WP74
	14	LC31751-002B-A	KNOB		AV-56WP74
	15	PU60109	CATCHER		
△	48	QAE0005-001	HV DIVIDER		
	49	QYSBSBG3008Z	TAP SCREW	3mm x 8mm	
△	50	QAE0006-001	FOCUS PACK		
	51	LC20977-002A-A	UNIT BRACKET R		
	52	LC20977-001A-A	UNIT BRACKET L		
	53	LC31735-001A-A	PJ LENS	(x3)	AV-48WP74
	53	LC31736-001A-A	PJ LENS	(x3)	AV-56WP74
	54	QUQ212-1708CG	FFC WIRE		
	55	QUQ212-1306CF	FFC WIRE		
	56	QYSBSF4012Z	TAP SCREW	4mm x 12mm(x3)	
	57	QYSBSF3012M	TAP SCREW	3mm x 12mm(x2)	
	58	LC11249-001B-A	CHASSIS BASE		
△	59	LC11511-001A-A	AV BOARD		
	60	QYSBSF3012M	TAP SCREW	3mm x 12mm(x5)	
△	61	QNZ0563-001	ANODE WIRE ASSY		
△	62	LC20106-001D-A	POWER CORD CLAMP		
	63	QAM0468-001	F CABLE		
	64	WJX0014-001A	E-COAXIAL ASSY		
△	65	R CRT BC SA	R CRT ASSY		
△	66	G CRT BC SA	G CRT ASSY		
△	67	B CRT BC SA	B CRT ASSY		
△	69	QMPD200-200-JC	POWER CORD(US/CA)	2m BLACK	
△	T502	QQH0113-002	FB TRANSF		

EXPLODED VIEW - 2

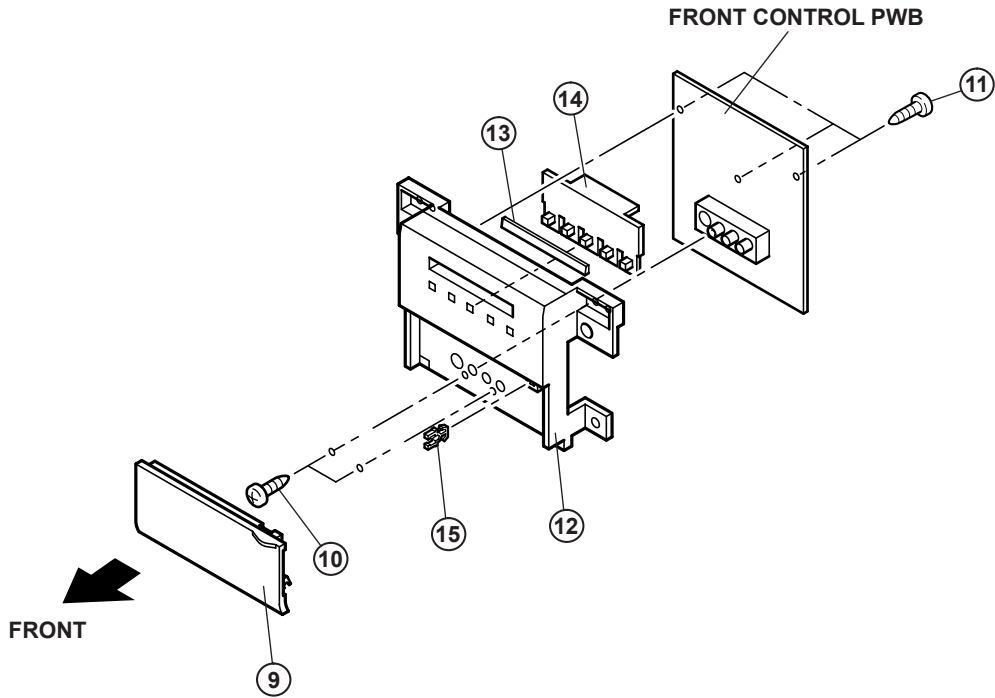

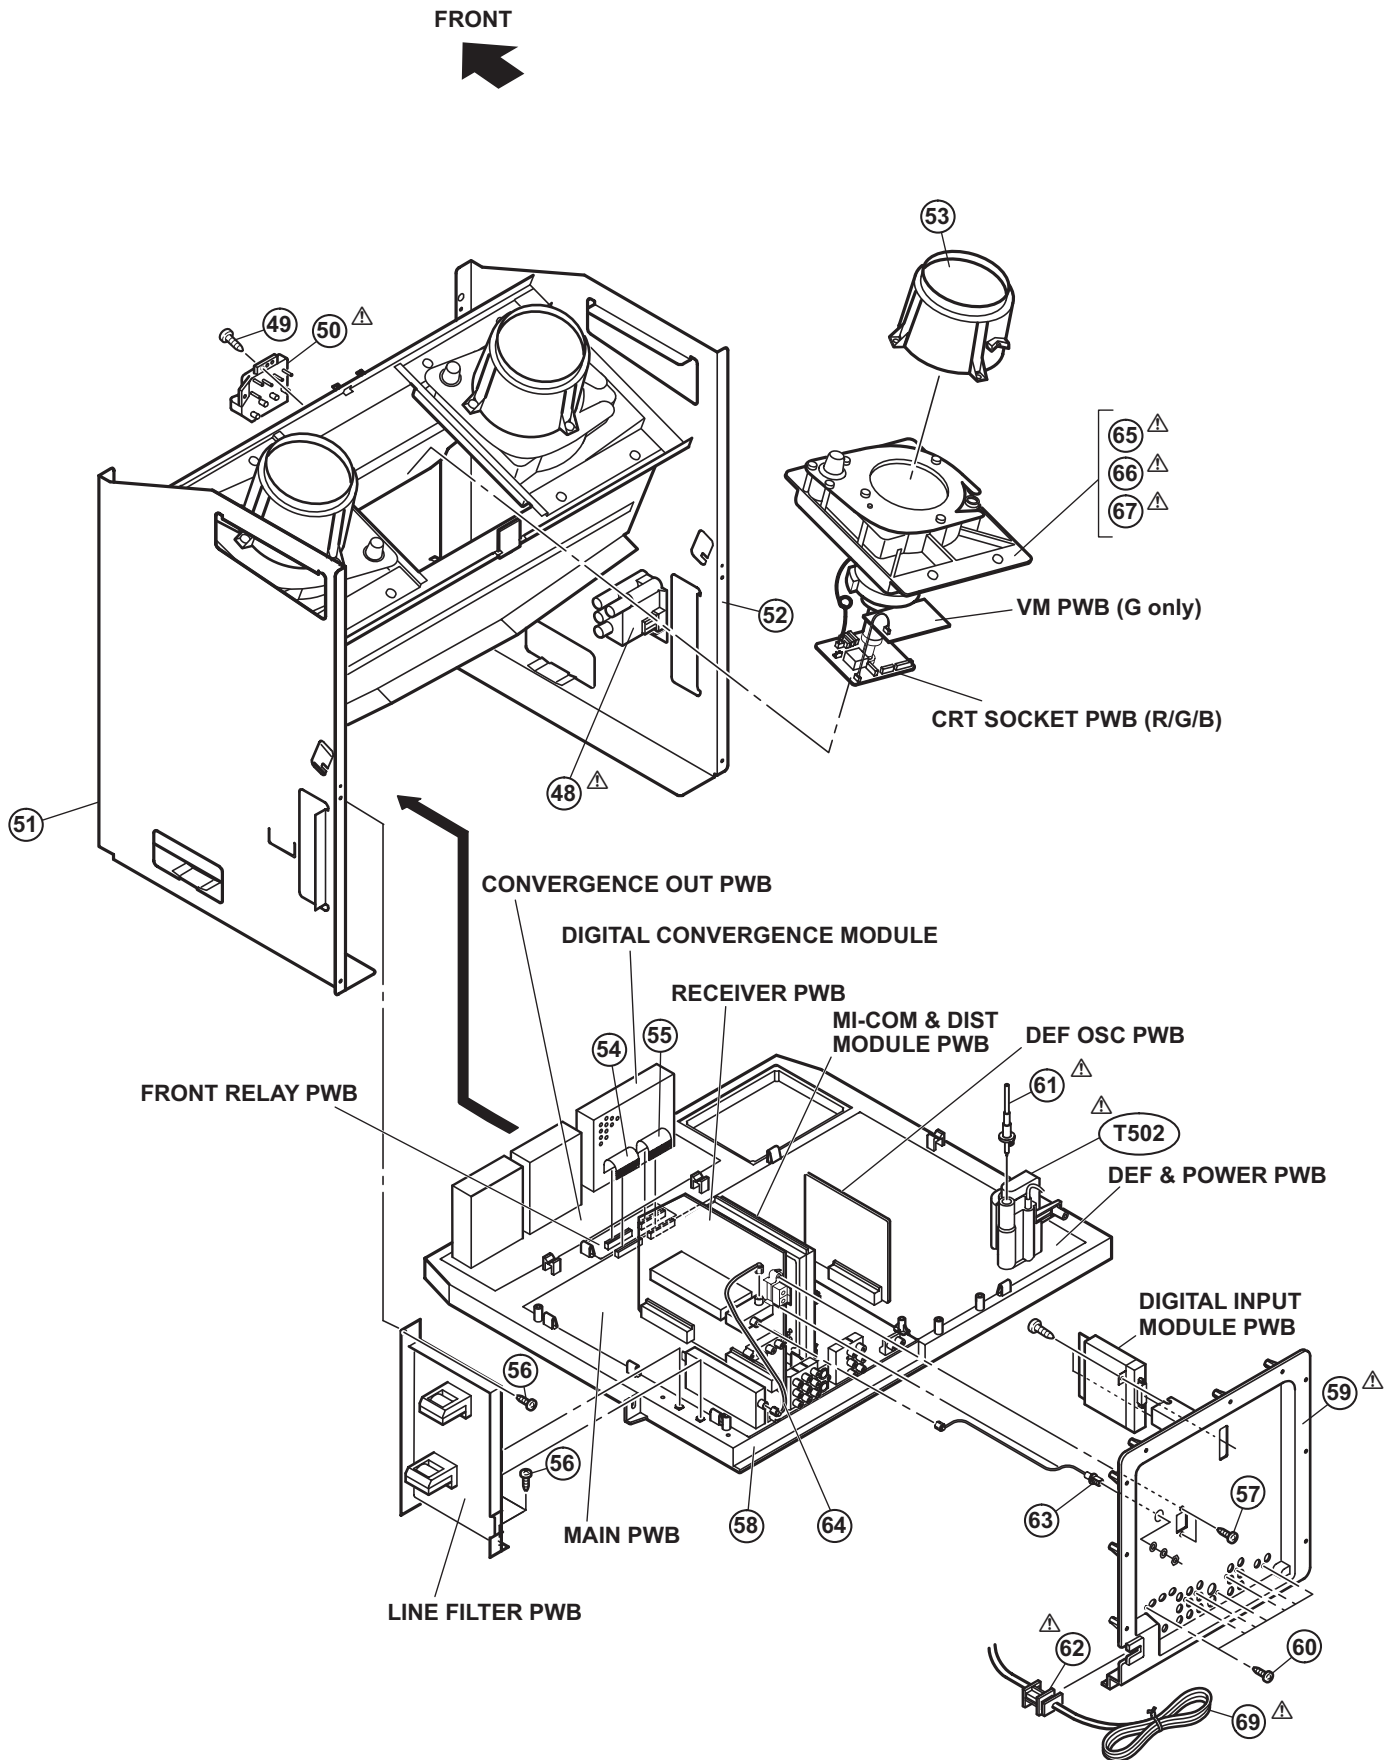

PRINTED WIRING BOARD PARTS LIST

MAIN PW BOARD ASS'Y  
(SSB-1070A-M2) [AV-48WP74]  
(SSB-1069A-M2) [AV-56WP74]

△Ref No.	Part No.	Part Name	Description	Local
IC1211	TA1318N	IC		
IC1212	TC7W08F-X	IC		
IC1301	AN15852A	IC		
IC1501	CXA2069Q	IC		
IC1502	M62320FP-X	IC		
IC1511	PQ3RD13	IC		
IC1641	NJM2150AM-X	IC		
△IC1661	AN5277	IC	(SERVICE)	
IC1703	AT24LC32-48WP74	IC		
IC1801	TA48M033F-X	IC		
IC1941	SI-8090S	IC		
IC1942	SI-8050S	IC		
IC1943	PQ1CG21H2FZ	IC		
IC1981	PQ1CG21H2FZ	IC		
IC1991	PQ12RD11	IC		
IC1993	MM1565AF-X	IC		
IC3001	MN82832	IC		
IC3002	R1170H331B-X	IC		
IC6001	NJM2701M-X	IC		
Q0701	2SK1374-X	MOS FET		
Q0702	2SK1374-X	MOS FET		
Q1101	2SD601A/QR/-X	TRANSISTOR		
Q1102	2SB709A/QR/-X	TRANSISTOR		
Q1103	2SD601A/QR/-X	TRANSISTOR		
Q1232	2SB709A/QR/-X	TRANSISTOR		
Q1301	2SC3837K/NP/-X	TRANSISTOR		
Q1302	2SC3837K/NP/-X	TRANSISTOR		
Q1303	2SC3837K/NP/-X	TRANSISTOR		
Q1401	2SD601A/QR/-X	TRANSISTOR		
Q1668	UN2213-X	DIGI TRANSISTOR		
Q1669	2SD601A/QR/-X	TRANSISTOR		
Q1672	2SD601A/QR/-X	TRANSISTOR		
Q1673	2SB709A/QR/-X	TRANSISTOR		
Q1911	2SA966/OY/-T	TRANSISTOR		
Q1912	2SD601A/QR/-X	TRANSISTOR		
Q1961	2SD601A/QR/-X	TRANSISTOR		
Q1962	2SD601A/QR/-X	TRANSISTOR		
Q1964	2SD601A/QR/-X	TRANSISTOR		
Q1965	UN2213-X	DIGI TRANSISTOR		
Q1981	2SC4685	TRANSISTOR		
Q1982	UN2213-X	DIGI TRANSISTOR		
Q1983	2SD601A/QR/-X	TRANSISTOR		
Q1984	2SC4682-T	TRANSISTOR		
Q3001	2SD601A/QR/-X	TRANSISTOR		
Q3002	2SD601A/QR/-X	TRANSISTOR		
Q3003	2SB709A/QR/-X	TRANSISTOR		
Q3004	2SD601A/QR/-X	TRANSISTOR		
Q3005	2SD601A/QR/-X	TRANSISTOR		
Q3006	2SB709A/QR/-X	TRANSISTOR		
Q3007	2SB709A/QR/-X	TRANSISTOR		
Q3501	2SB709A/QR/-X	TRANSISTOR		
Q3502	2SD601A/QR/-X	TRANSISTOR		
Q3505	2SB709A/QR/-X	TRANSISTOR		
Q3506	2SD601A/QR/-X	TRANSISTOR		
Q3509	2SB709A/QR/-X	TRANSISTOR		
Q3510	2SD601A/QR/-X	TRANSISTOR		
Q6001	2SD601A/QR/-X	TRANSISTOR		
Q6002	2SD601A/QR/-X	TRANSISTOR		
D1093	MA8082/M/-X	Z DIODE		
D1301	MA8100/M/-X	Z DIODE		
D1302	MA8100/M/-X	Z DIODE		
D1303	MA8100/M/-X	Z DIODE		
D1401	MA111-X	SI DIODE		
D1402	UDZS5.1B-X	Z DIODE		
D1403	MA111-X	SI DIODE		
D1595	MA8100/M/-X	Z DIODE		
D1596	MA8100/M/-X	Z DIODE		
D1598	MA8100/M/-X	Z DIODE		
D1599	MA8100/M/-X	Z DIODE		
D1662	MA3330/L/-X	Z DIODE		
D1663	MA3330/L/-X	Z DIODE		
D1667	MA111-X	SI DIODE		
D1668	MA111-X	SI DIODE		
D1669	MA111-X	SI DIODE		
D1702	MA111-X	SI DIODE		
D1703	MA111-X	SI DIODE		
D1704	MA8100/M/-X	Z DIODE		

△Ref No.	Part No.	Part Name	Description	Local
D1705	MA8100/M/-X	Z DIODE		
D1801	1SR35-400A-T2	SI DIODE		
D1802	MA111-X	SI DIODE		
D1803	MA111-X	SI DIODE		
D1891	MA8082/M/-X	Z DIODE		
D1892	MA8082/M/-X	Z DIODE		
D1893	MA8051/M/-X	Z DIODE		
D1894	MA8051/M/-X	Z DIODE		
D1941	RK34-LFC4	SB DIODE		
D1942	D3S4M-F1P20	SB DIODE		
D1943	RK34-LFC4	SB DIODE		
D1945	MA111-X	SI DIODE		
D1946	MA111-X	SI DIODE		
D1962	MA3030/H/-X	Z DIODE		
D1964	MA111-X	SI DIODE		
D1965	MA111-X	SI DIODE		
D1967	PTZ6.8B-X	Z DIODE		
D1968	PTZ6.8B-X	Z DIODE		
D1969	PTZ11B-X	Z DIODE		
D1981	RK34-LFC4	SB DIODE		
D1982	PTZ6.8B-X	Z DIODE		
D1991	MA111-X	SI DIODE		
D1993	MA111-X	SI DIODE		
D2101	MA8100/M/-X	Z DIODE		
D2121	MA8100/M/-X	Z DIODE		
D2201	MA8100/M/-X	Z DIODE		
D2204	MA8100/M/-X	Z DIODE		
D2205	MA8100/M/-X	Z DIODE		
D2206	MA8100/M/-X	Z DIODE		
D2207	MA8100/M/-X	Z DIODE		
D2209	MA8100/M/-X	Z DIODE		
D2210	MA8100/M/-X	Z DIODE		
D2212	MA8100/M/-X	Z DIODE		
D2213	MA8100/M/-X	Z DIODE		
D2214	MA8100/M/-X	Z DIODE		
D2215	MA8100/M/-X	Z DIODE		
D2216	MA8100/M/-X	Z DIODE		
D2217	MA8100/M/-X	Z DIODE		
D2218	MA8100/M/-X	Z DIODE		
D2219	MA8100/M/-X	Z DIODE		
D2220	MA8100/M/-X	Z DIODE		
D2402	MA8100/M/-X	Z DIODE		
D2403	MA8100/M/-X	Z DIODE		
D2404	MA8100/M/-X	Z DIODE		
D2406	MA8100/M/-X	Z DIODE		
D2421	MA8100/M/-X	Z DIODE		
D2422	MA8100/M/-X	Z DIODE		
C1102	QETN1CM-477Z	E CAPACITOR	470uF 16V M	
C1103	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C1111	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C1112	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C1113	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C1213	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C1214	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
C1215	QFLC1HJ-103Z	M CAPACITOR	0.01uF 50V J	
C1216	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C1218	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1219	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C1233	NDC31HJ-180X	C CAPACITOR	18pF 50V J	
C1301	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C1302	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C1303	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C1304	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1305	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1306	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C1307	QETN1CM-106Z	E CAPACITOR	10uF 16V M	
C1311	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1312	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1313	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1314	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1315	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1318	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1321	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1322	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C1323	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C1324	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1325	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1326	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C1327	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C1328	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
C1329	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C1331	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1332	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	

△Ref No.	Part No.	Part Name	Description	Local	△Ref No.	Part No.	Part Name	Description	Local
C1333	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		C1948	QETN1CM-477Z	E CAPACITOR	470uF 16V M	
C1341	NCB11CK-105X	C CAPACITOR	1uF 16V K		C1949	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M	
C1342	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		C1950	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M	
C1343	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		C1951	QETN1VM-108Z	E CAPACITOR	1000uF 35V M	
C1351	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		C1952	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	
C1352	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		C1953	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M	
C1353	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		C1954	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M	
C1354	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		C1955	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C1355	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		C1961	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C1356	NCB11CK-105X	C CAPACITOR	1uF 16V K		C1981	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C1366	NCB11CK-105X	C CAPACITOR	1uF 16V K		C1984	QETN1VM-477Z	E CAPACITOR	470uF 35V M	
C1367	NCB11CK-105X	C CAPACITOR	1uF 16V K		C1985	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M	
C1368	NCB11CK-105X	C CAPACITOR	1uF 16V K		C1989	QETN1AM-108Z	E CAPACITOR	1000uF 10V M	
C1371	QETN1CM-336Z	E CAPACITOR	33uF 16V M		C1991	QETN1EM-107Z	E CAPACITOR	100uF 25V M	
C1372	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1992	QETN1CM-477Z	E CAPACITOR	470uF 16V M	
C1381	QETN1CM-336Z	E CAPACITOR	33uF 16V M		C1994	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C1382	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C1995	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C1391	QETN1CM-336Z	E CAPACITOR	33uF 16V M		C1996	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C1392	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2101	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1403	QETN1AM-108Z	E CAPACITOR	1000uF 10V M		C2102	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C1404	QETN1AM-108Z	E CAPACITOR	1000uF 10V M		C2103	QETN1HM-106Z	E CAPACITOR	100uF 50V M	
C1405	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M		C2104	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C1406	QETN1AM-108Z	E CAPACITOR	1000uF 10V M		C2105	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C1409	QETN1HM-106Z	E CAPACITOR	100uF 50V M		C2106	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C1410	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2121	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C2123	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C1412	QETN1CM-107Z	E CAPACITOR	100uF 16V M		C2124	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C1415	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		C2126	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C1416	QETN1EM-476Z	E CAPACITOR	47uF 25V M		C2127	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C1417	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		C2128	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C1418	QETN1EM-476Z	E CAPACITOR	47uF 25V M		C2144	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C1421	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M		C2145	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C1423	QETN1HM-476Z	E CAPACITOR	47uF 50V M		C2146	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C1430	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		C2302	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1431	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		C2303	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1432	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		C2322	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1433	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		C2323	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1442	QETN1EM-476Z	E CAPACITOR	47uF 25V M		C2342	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1505	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M		C2343	NCB11CK-105X	C CAPACITOR	1uF 16V K	
C1510	QENC1CM-106Z	BP E CAPACITOR	10uF 16V M		C3001	QENC1AM-336Z	BP E CAPACITOR	33uF 10V M	
C1519	QETN1EM-476Z	E CAPACITOR	47uF 25V M		C3002	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C1532	QETN1HM-226Z	E CAPACITOR	22uF 50V M		C3003	NDC31HJ-121X	C CAPACITOR	120pF 50V J	
C1539	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M		C3004	NDC31HJ-150X	C CAPACITOR	15pF 50V J	
C1540	QETN1AM-107Z	E CAPACITOR	100uF 10V M		C3005	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C1579	QETN1EM-476Z	E CAPACITOR	47uF 25V M		C3006	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1598	NCB11CK-225X	C CAPACITOR	2.2uF 16V K		C3007	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	
C1599	NCB11CK-225X	C CAPACITOR	2.2uF 16V K		C3008	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C1641	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M		C3009	NDC31HJ-121X	C CAPACITOR	120pF 50V J	
C1642	NCB31HK-153X	C CAPACITOR	0.015uF 50V K 48WP74		C3010	NDC31HJ-150X	C CAPACITOR	15pF 50V J	
C1642	NCB31CK-473X	C CAPACITOR	0.047uF 16V K 56WP74		C3011	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	
C1643	NCB31CK-473X	C CAPACITOR	0.047uF 16V K 48WP74		C3012	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1643	NCB31CK-333X	C CAPACITOR	0.033uF 16V K 56WP74		C3013	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1645	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C3014	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C1646	QETN1EM-476Z	E CAPACITOR	47uF 25V M		C3015	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1647	QETN1HM-226Z	E CAPACITOR	22uF 50V M		C3016	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1648	QETN1HM-106Z	E CAPACITOR	10uF 50V M		C3017	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	
C1651	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M		C3018	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1652	NCB31HK-153X	C CAPACITOR	0.015uF 50V K 48WP74		C3019	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C1652	NCB31CK-473X	C CAPACITOR	0.047uF 16V K 56WP74		C3020	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C1653	NCB31CK-473X	C CAPACITOR	0.047uF 16V K 48WP74		C3021	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C1653	NCB31CK-333X	C CAPACITOR	0.033uF 16V K 56WP74		C3022	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1663	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C3023	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1665	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		C3024	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1667	QETN1HM-106Z	E CAPACITOR	10uF 50V M		C3025	QETN1CM-106Z	E CAPACITOR	10uF 16V M	
C1668	NDC31HJ-101X	C CAPACITOR	100pF 50V J		C3026	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1669	NCB11CK-105X	C CAPACITOR	1uF 16V K		C3027	NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	
C1670	QETN1HM-106Z	E CAPACITOR	10uF 50V M		C3028	NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	
C1671	NDC31HJ-101X	C CAPACITOR	100pF 50V J		C3029	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1672	NCB11CK-105X	C CAPACITOR	1uF 16V K		C3030	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1673	QETN1HM-107Z	E CAPACITOR	100uF 50V M		C3031	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1674	QETM1HM-108	E CAPACITOR	1000uF 50V M		C3032	NDC31HJ-560X	C CAPACITOR	56pF 50V J	
C1675	QFV21HJ-124Z	MF CAPACITOR	0.12uF 50V J		C3033	NDC31HJ-330X	C CAPACITOR	33pF 50V J	
C1676	QFV21HJ-124Z	MF CAPACITOR	0.12uF 50V J		C3034	NDC31HJ-560X	C CAPACITOR	56pF 50V J	
C1677	QETN1EM-108Z	E CAPACITOR	1000uF 25V M		C3035	NDC31HJ-330X	C CAPACITOR	33pF 50V J	
C1678	QETN1EM-108Z	E CAPACITOR	1000uF 25V M		C3036	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1679	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		C3037	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1680	QETN1HM-106Z	E CAPACITOR	10uF 50V M		C3038	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1696	QETN1HM-106Z	E CAPACITOR	10uF 50V M		C3039	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C1697	QETN1EM-476Z	E CAPACITOR	47uF 25V M		C3041	QETN1CM-106Z	E CAPACITOR	10uF 16V M	
C1702	NCB11CK-105X	C CAPACITOR	1uF 16V K		C3042	NCB31HK-472X	C CAPACITOR	4700pF 50V K	
C1802	QETN1HM-106Z	E CAPACITOR	10uF 50V M		C3044	NCB31HK-472X	C CAPACITOR	4700pF 50V K	
C1803	QETN1EM-476Z	E CAPACITOR	47uF 25V M		C3045	NCB31HK-472X	C CAPACITOR	4700pF 50V K	
C1941	QETN1VM-108Z	E CAPACITOR	1000uF 35V M		C3046	NCB31HK-472X	C CAPACITOR	4700pF 50V K	
C1942	QETN1CM-108Z	E CAPACITOR	1000uF 16V M		C3047	QETN1CM-106Z	E CAPACITOR	10uF 16V M	
C1944	QETN1VM-108Z	E CAPACITOR	1000uF 35V M		C3048	NCB31HK-472X	C CAPACITOR	4700pF 50V K	
C1945	QE2056-128	E CAPACITOR	1200uF 10V M		C3049	NCB31HK-472X	C CAPACITOR	4700pF 50V K	
C1947	QETN1CM-477Z	E CAPACITOR	470uF 16V M		C3050	NCB31HK-472X	C CAPACITOR	4700pF 50V K	

△Ref No.	Part No.	Part Name	Description	Local	△Ref No.	Part No.	Part Name	Description	Local
C3051	NCB31HK-472X	C CAPACITOR	4700pF 50V K		R1220	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C3052	NCB31HK-472X	C CAPACITOR	4700pF 50V K		R1221	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C3053	NCB31HK-472X	C CAPACITOR	4700pF 50V K		R1226	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C3054	NCB31HK-472X	C CAPACITOR	4700pF 50V K		R1228	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C3055	NCB31HK-472X	C CAPACITOR	4700pF 50V K		R1229	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
C3056	NCB31HK-472X	C CAPACITOR	4700pF 50V K		R1230	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C3057	QETN1CM-106Z	E CAPACITOR	10uF 16V M		R1231	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
C3058	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R1232	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
C3059	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R1234	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
C3060	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R1236	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
C3061	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R1240	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C3062	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R1301	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C3063	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R1302	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C3064	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R1337	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
C3065	QETN1CM-106Z	E CAPACITOR	10uF 16V M		R1347	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
C3066	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R1372	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C3067	QETN1CM-476Z	E CAPACITOR	47uF 16V M		R1374	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
C3068	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R1375	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C3069	QETN1CM-476Z	E CAPACITOR	47uF 16V M		R1379	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
C3070	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R1382	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C3071	QETN1CM-476Z	E CAPACITOR	47uF 16V M		R1384	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
C3072	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R1385	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C3077	NCB31AK-334X	C CAPACITOR	0.33uF 10V K		R1392	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C3078	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R1394	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
C3079	NDC31HJ-470X	C CAPACITOR	47pF 50V J		R1395	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C3080	QBTC1CK-106Z	TA E CAPACITOR	10uF 16V K		R1401	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C3082	NDC31HJ-151X	C CAPACITOR	150pF 50V J		R1402	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C3086	NCB31HK-152X	C CAPACITOR	1500pF 50V K		R1407	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C3088	NDC31HJ-100X	C CAPACITOR	10pF 50V J		R1409	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C3089	NDC31HJ-100X	C CAPACITOR	10pF 50V J		R1421	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J	
C3090	NDC31HJ-100X	C CAPACITOR	10pF 50V J		R1422	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C3099	NCB31HK-472X	C CAPACITOR	4700pF 50V K		R1423	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
C3100	NCB31HK-472X	C CAPACITOR	4700pF 50V K		R1501	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
C3501	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R1502	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
C3502	NDC31HJ-101X	C CAPACITOR	100pF 50V J		R1504	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
C3503	NDC31HJ-121X	C CAPACITOR	120pF 50V J		R1507	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
C3504	NDC31HJ-150X	C CAPACITOR	15pF 50V J		R1508	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
C3506	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z		R1509	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
C3507	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R1514	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C3508	NDC31HJ-101X	C CAPACITOR	100pF 50V J		R1515	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C3509	NDC31HJ-121X	C CAPACITOR	120pF 50V J		R1516	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
C3510	NDC31HJ-150X	C CAPACITOR	15pF 50V J		R1517	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C3512	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z		R1518	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
C3513	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R1519	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C3514	NDC31HJ-101X	C CAPACITOR	100pF 50V J		R1520	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
C3515	NDC31HJ-121X	C CAPACITOR	120pF 50V J		R1521	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
C3516	NDC31HJ-150X	C CAPACITOR	15pF 50V J		R1522	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
C3518	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z		R1523	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
C3519	QENC1CM-336Z	BP E CAPACITOR	33uF 16V M		R1524	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
C3520	QENC1CM-336Z	BP E CAPACITOR	33uF 16V M		R1525	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
C3521	QENC1CM-336Z	BP E CAPACITOR	33uF 16V M		R1526	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
C6001	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M		R1527	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
C6002	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M		R1528	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
C6003	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R1529	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
C6004	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R1530	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C6005	NCB31HK-472X	C CAPACITOR	4700pF 50V K		R1533	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
C6006	NCB31CK-273X	C CAPACITOR	0.027uF 16V K		R1534	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
C6007	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R1535	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
C6008	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R1536	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
C6009	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R1537	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
C6010	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R1538	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
					R1539	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R0511	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R1543	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R0606	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R1547	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0705	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R1548	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0706	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R1549	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1097	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R1550	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R1102	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J		R1551	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1103	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J		R1552	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R1105	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R1571	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1119	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R1577	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R1120	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R1578	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R1121	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R1579	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R1125	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R1582	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1126	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R1598	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R1127	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R1599	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R1128	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R1611	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
R1132	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R1612	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
R1133	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R1613	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R1134	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R1614	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R1135	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J		R1615	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
R1202	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R1616	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
R1203	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R1619	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1213	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R1641	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R1214	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R1642	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R1218	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J		R1643	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R1219	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J		R1646	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	



△Ref No.	Part No.	Part Name	Description	Local	△Ref No.	Part No.	Part Name	Description	Local
R1647	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R2325	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R1649	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R2328	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R1651	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R2330	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1652	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R2345	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R1653	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R2348	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R1656	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R2350	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1658	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R3001	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
R1659	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R3002	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R1661	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3003	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R1663	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3004	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R1665	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		R3005	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	
R1666	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J		R3006	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
R1667	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		R3007	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R1668	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		R3008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1669	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J		R3009	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R1670	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		R3010	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
R1671	QRJ146J-2R2X	UNF C RESISTOR	2.2Ω 1/4W J		R3011	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1672	QRJ146J-2R2X	UNF C RESISTOR	2.2Ω 1/4W J		R3012	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
R1673	QRK126J-102X	UNF C RESISTOR	1kΩ 1/2W J		R3013	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R1674	QRK126J-102X	UNF C RESISTOR	1kΩ 1/2W J		R3014	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R1680	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J		R3015	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R1681	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J		R3016	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	
R1682	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R3017	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
R1691	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J		R3018	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R1693	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1702	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R3020	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R1703	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R3021	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
R1891	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J		R3022	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1892	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J		R3023	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R1894	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J		R3024	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R1895	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J		R3025	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R1896	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J		R3026	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R1897	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J		R3027	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R1910	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J		R3028	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R1911	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R3029	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R1912	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J		R3030	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R1913	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J		R3031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1914	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J		R3032	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
△R1941	QRK126J-5R6X	UNF C RESISTOR	5.6Ω 1/2W J		R3033	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1942	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J		R3035	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1943	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J		R3036	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
△R1944	QRK126J-220X	UNF C RESISTOR	22Ω 1/2W J		R3037	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1945	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3039	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R1946	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3040	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R1947	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J		R3042	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R1949	NRSA63D-122X	MG RESISTOR	1.2kΩ 1/16W D		R3043	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1950	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J		R3044	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1952	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J		R3045	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R1953	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J		R3047	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R1954	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3048	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R1959	NRSA63D-182X	MG RESISTOR	1.8kΩ 1/16W D		R3049	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R1961	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3050	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
R1962	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J		R3051	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
R1963	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J		R3052	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R1964	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R3053	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
R1965	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3054	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R1966	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J		R3055	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R1967	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J		R3056	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R1968	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3057	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R1969	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R3058	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R1972	QRT039J-8R2	MF RESISTOR	8.2Ω 3W J		R3059	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R1973	QRL039J-100	OMF RESISTOR	10Ω 3W J		R3060	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	
R1981	QRK126J-181X	UNF C RESISTOR	180Ω 1/2W J		R3061	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1982	NRSA63D-122X	MG RESISTOR	1.2kΩ 1/16W D		R3062	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1983	NRSA63D-122X	MG RESISTOR	1.2kΩ 1/16W D		R3063	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1984	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J		R3064	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1985	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3065	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R1986	QRK126J-331X	UNF C RESISTOR	330Ω 1/2W J		R3066	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R1987	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J		R3071	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1991	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J		R3072	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R1992	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J		R3073	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2102	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J		R3074	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2103	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J		R3075	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2104	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J		R3076	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2105	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J		R3077	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2106	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J		R3078	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2122	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J		R3079	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2123	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J		R3080	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2125	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J		R3081	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2126	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J		R3082	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2127	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J		R3501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R2144	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J		R3502	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R2145	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J		R3503	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	
R2146	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J		R3504	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	
R2305	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J		R3505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R2308	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J		R3507	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R2310	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R3508	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

△Ref No.	Part No.	Part Name	Description	Local	△Ref No.	Part No.	Part Name	Description	Local
R3509	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		K1305	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3511	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		K1306	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3516	NRSA63J-680X	MG RESISTOR	68Ω 1/16W J		K1307	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3517	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		K1943	CE42050-001Z	BEADS CORE		
R3518	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		K1944	CE42050-001Z	BEADS CORE		
R3519	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J		K3001	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R3520	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J		LC1301	QQR1199-001	EMI FILTER		
R3521	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		LC1302	QQR1199-001	EMI FILTER		
R3523	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		LC1303	QQR1199-001	EMI FILTER		
R3525	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		LC2301	QQR1199-001	EMI FILTER		
R3532	NRSA63J-680X	MG RESISTOR	68Ω 1/16W J		LC2302	QQR1199-001	EMI FILTER		
R3533	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		LC2303	QQR1199-001	EMI FILTER		
R3534	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		LC2321	QQR1199-001	EMI FILTER		
R3535	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J		LC2322	QQR1199-001	EMI FILTER		
R3536	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J		LC2323	QQR1199-001	EMI FILTER		
R3537	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		LC2341	QQR1199-001	EMI FILTER		
R3539	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		LC2342	QQR1199-001	EMI FILTER		
R3541	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		LC2343	QQR1199-001	EMI FILTER		
R3548	NRSA63J-680X	MG RESISTOR	68Ω 1/16W J		LC3001	NQR0450-002X	EMI FILTER	22pF 50V M	
R3549	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		LC3002	NQR0450-002X	EMI FILTER	22pF 50V M	
R3550	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		LC3003	NQR0415-005X	EMI FILTER	0.1uF 25V M	
R3551	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		LC3004	NQR0450-004X	EMI FILTER	100pF 50V M	
R3552	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		LC3005	NQR0450-002X	EMI FILTER	22pF 50V M	
R3553	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		LC3006	NQR0450-004X	EMI FILTER	100pF 50V M	
R3554	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		LC3007	NQR0450-002X	EMI FILTER	22pF 50V M	
R3555	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		LC3008	NQR0450-002X	EMI FILTER	22pF 50V M	
R6001	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		LC3501	NQR0450-004X	EMI FILTER	100pF 50V M	
R6002	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		LC3502	NQR0450-004X	EMI FILTER	100pF 50V M	
R6003	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		LC3503	NQR0450-004X	EMI FILTER	100pF 50V M	
R6004	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		SL1211	CSB503F30-T2	C RESONATOR		
R6006	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		TU1101	QAU0303-001	TUNER	MAIN	
R6007	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J		X3001	NAX0570-001X	CRYSTAL	27.000MHz	
R6008	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J		Y1502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6009	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		Y1504	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6011	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Y1661	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R6012	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		Y1662	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
RA3001	NRZ0040-103X	NET RESISTOR	10kΩ 1/16W J x4		Y1663	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
RA3002	NRZ0040-103X	NET RESISTOR	10kΩ 1/16W J x4		Y1664	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
RA3003	NRZ0040-103X	NET RESISTOR	10kΩ 1/16W J x4		Y1821	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
RA3004	NRZ0040-103X	NET RESISTOR	10kΩ 1/16W J x4		Y1914	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
					Y1916	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L1102	QRN143J-0R0X	C RESISTOR	0Ω 1/4W J		Y1917	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L1211	QQL25CK-100Z	COIL	10uH K		Y1952	QRN143J-0R0X	C RESISTOR	0Ω 1/4W J	
L1301	QRN143J-0R0X	C RESISTOR	0Ω 1/4W J		Y1954	QRN143J-0R0X	C RESISTOR	0Ω 1/4W J	
L1302	QRN143J-0R0X	C RESISTOR	0Ω 1/4W J		Y1991	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L1401	QQL25CK-100Z	COIL	10uH K		Y1992	QRN143J-0R0X	C RESISTOR	0Ω 1/4W J	
L1402	QQL26AK-100Z	COIL	10uH K		Y1994	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L1941	QQR1129-003	CHOKE COIL			Y1995	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L1942	QQR1129-003	CHOKE COIL							
L1943	QQL26AK-330Z	COIL	33uH K						
L1944	QQL26AK-330Z	COIL	33uH K						
L1945	QQL26AK-220Z	COIL	22uH K						
L1946	QQL26AK-220Z	COIL	22uH K						
L1947	QQR1129-003	CHOKE COIL							
L1948	QQL26AK-100Z	COIL	10uH K						
L1949	QQL26AK-220Z	COIL	22uH K						
L1950	QRN143J-0R0X	C RESISTOR	0Ω 1/4W J						
L1981	QQR1129-003	CHOKE COIL							
L1982	QQL26AK-220Z	C RESISTOR	22uH K						
L1983	QRN143J-0R0X	C RESISTOR	0Ω 1/4W J						
L3001	NQL092K-6R8X	P COIL	6.8uH K						
L3002	NQL092K-6R8X	P COIL	6.8uH K						
L3003	NQR0413-003X	FERRITE BEADS			Q401	2SC3311A/QR/-T	TRANSISTOR		
L3004	NQR0413-003X	FERRITE BEADS			Q402	2SC3311A/QR/-T	TRANSISTOR		
L3005	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J		Q501	BSN304-T	MOS FET		
L3006	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J		△Q503	2SC5904-RL	POW TRANSISTOR		
L3007	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J		Q521	2SC3311A/QR/-T	TRANSISTOR		
L3501	NQL092K-6R8X	P COIL	6.8uH K		Q531	IRFI620G	POWER MOS FET		
L3502	NQL092K-6R8X	P COIL	6.8uH K		Q532	2SC1959/Y/-T	TRANSISTOR		
L3503	NQL092K-6R8X	P COIL	6.8uH K		Q533	2SA562TM/Y/-T	TRANSISTOR		
					Q951	2SC1627A/Y/-T	TRANSISTOR		
CN1001	QGB1506L1-16	CONNECTOR	B-B (1-16)		Q952	2SC3311A/QR/-T	TRANSISTOR		
CN1002	QGB1506L1-16	CONNECTOR	B-B (1-16)		Q953	2SC3311A/QR/-T	TRANSISTOR		
CN1003	QGB1506L1-16	CONNECTOR	B-B (1-16)		Q954	2SC3311A/QR/-T	TRANSISTOR		
CN1004	QGC2508C1-C0	CONNECTOR	(1-120)		Q971	2SA1208/ST/Z1-T	TRANSISTOR		
CN1005	QGB1505J1-15	CONNECTOR	B-B (1-15)						
CN1006	QGB1505J1-35	CONNECTOR	B-B (1-35)		D201	1SR35-400A-T2	SI DIODE		
CN100G	QGF1201C2-17	CONNECTOR	FFC/FPC (1-17)		D401	MTZJ75-T2	Z DIODE		
CN100H	QGF1201C2-13	CONNECTOR	FFC/FPC (1-13)		D402	1SR35-400A-T2	SI DIODE		
J1091	QNS0001-001	3.5 JACK	COMPULINK		D403	1SS133-T2	SI DIODE		
J2101	QNN0521-001	PIN JACK	V/L/R		D404	MTZJ9.1B-T2	Z DIODE		
J2111	QND0104-001	S JACK	S-VIDEO IN		D405	1SS133-T2	SI DIODE		
J2121	QNN0535-001	PIN JACK	COMPONENT IN		D406	MTZJ6.8C-T2	Z DIODE		
J2141	QNN0536-001	PIN JACK	DIGITAL IN		D407	1SR35-400A-T2	SI DIODE		
K1301	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		D501	1SS81-T5	SI DIODE		
K1303	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		D504	RG2A-LFC4	SI DIODE		
K1304	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		D505	V11CA-C1	SI DIODE		

POWER & DEF PW BOARD ASS'Y  
(SSB-2070A-M2) [AV-48WP74]  
(SSB-2069A-M2) [AV-56WP74]

△Ref No.	Part No.	Part Name	Description	Local
△IC401	LA7876NZ	IC		
△IC911	STR-F6629B/F7	IC		
IC921	SE140N	IC		
Q401	2SC3311A/QR/-T	TRANSISTOR		
Q402	2SC3311A/QR/-T	TRANSISTOR		
Q501	BSN304-T	MOS FET		
△Q503	2SC5904-RL	POW TRANSISTOR		
Q521	2SC3311A/QR/-T	TRANSISTOR		
Q531	IRFI620G	POWER MOS FET		
Q532	2SC1959/Y/-T	TRANSISTOR		
Q533	2SA562TM/Y/-T	TRANSISTOR		
Q951	2SC1627A/Y/-T	TRANSISTOR		
Q952	2SC3311A/QR/-T	TRANSISTOR		
Q953	2SC3311A/QR/-T	TRANSISTOR		
Q954	2SC3311A/QR/-T	TRANSISTOR		
Q971	2SA1208/ST/Z1-T	TRANSISTOR		
D201	1SR35-400A-T2	SI DIODE		
D401	MTZJ75-T2	Z DIODE		
D402	1SR35-400A-T2	SI DIODE		
D403	1SS133-T2	SI DIODE		
D404	MTZJ9.1B-T2	Z DIODE		
D405	1SS133-T2	SI DIODE		
D406	MTZJ6.8C-T2	Z DIODE		
D407	1SR35-400A-T2	SI DIODE		
D501	1SS81-T5	SI DIODE		
D504	RG2A-LFC4	SI DIODE		
D505	V11CA-C1	SI DIODE		

△Ref No.	Part No.	Part Name	Description	Local	△Ref No.	Part No.	Part Name	Description	Local
D506	FMV-3FU-F1	SI DIODE			C907	QE20572-128	E CAPACITOR	1200uF 200V M	
D521	MTZJ12C-T2	Z DIODE			△C908	QCZ9054-102	C CAPACITOR	1000pF AC250V Z	
D522	1SS81-T5	SI DIODE			C912	QCZ0340-332	C CAPACITOR	3300pF 2kV K	
D531	RGP10J-5025-T3	SI DIODE			C913	QFLC1HJ-471Z	M CAPACITOR	470pF 50V J	
D561	MTZJ7.5S-T2	Z DIODE			C914	QETN1HM-227Z	E CAPACITOR	220uF 50V M	
D562	MTZJ7.5S-T2	Z DIODE			C916	QCS31HJ-331Z	C CAPACITOR	330pF 50V J	
D583	1SS133-T2	SI DIODE			C917	QFN31HJ-182Z	M CAPACITOR	1800pF 50V J	
D801	EU2-T3	SI DIODE			C918	QFV41HJ-104Z	MF CAPACITOR	0.1uF 50V J	
D802	EU2-T3	SI DIODE			C919	QFP32GJ-103	PP CAPACITOR	0.01uF 400V J	
D803	RU30A-F1	SI DIODE			C920	QCZ0115-151Z	C CAPACITOR	150pF 2kV K	
D811	1SR124-400A-T2	SI DIODE			C930	QCS31HJ-181Z	C CAPACITOR	180pF 50V J	
△D901	RBV-606	BRIDGE DIODE			C931	QE20203-227	E CAPACITOR	220uF 160V M	
D910	MA700A-T2	SB DIODE			C932	QETM1EM-228	E CAPACITOR	2200uF 25V M	
△D911	RGP10J-5025-T3	SI DIODE			C934	QETM1VM-228	E CAPACITOR	2200uF 35V M	
D912	AU01Z-T2	FR DIODE			C935	QETM1VM-228	E CAPACITOR	2200uF 35V M	
D913	AU01Z-T2	FR DIODE			C937	QCZ0340-152	C CAPACITOR	1500pF 2kV K	
D914	1SS133-T2	SI DIODE			C942	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
D915	SARS01-T2	SI DIODE			C943	QETN1CM-477Z	E CAPACITOR	470uF 16V M	
D916	1SS133-T2	SI DIODE			C944	QETN1CM-227Z	E CAPACITOR	220uF 16V M	
D917	MTZJ27B-T2	Z DIODE			C945	QETM1VM-228	E CAPACITOR	2200uF 35V M	
D918	MTZJ5.1B-T2	Z DIODE			C946	QETN1VM-108Z	E CAPACITOR	1000uF 35V M	
D920	1SS133-T2	SI DIODE			C954	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
D931	RU4AM-F1	SI DIODE			C971	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
D932	RU30A-F1	SI DIODE			C972	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
D934	RU4AM-F1	SI DIODE			C973	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
D935	RU3YX-LFC4	SI DIODE			△C993	QCZ9074-472	C CAPACITOR	4700pF AC250 M	
D936	FMX-G12S	SI DIODE			△C994	QCZ9074-472	C CAPACITOR	4700pF AC250 M	
D937	EU2-T3	SI DIODE			△C995	QCZ9074-472	C CAPACITOR	4700pF AC250 M	
D938	FMX-G12S	SI DIODE			△C997	QCZ9074-472	C CAPACITOR	4700pF AC250 M	
D941	MTZJ33B-T2	Z DIODE			△C998	QCZ9074-472	C CAPACITOR	4700pF AC250 M	
D952	MTZJ12C-T2	Z DIODE			△C999	QCZ9074-472	C CAPACITOR	4700pF AC250 M	
D953	1SS244-T2	SI DIODE							
D954	1SS133-T2	SI DIODE			R201	QRA14CF-1803Y	CMF RESISTOR	180kΩ 1/4W F	
D956	1SS133-T2	SI DIODE			R202	QRA14CF-2703Y	CMF RESISTOR	270kΩ 1/4W F	
D958	MTZJ6.8C-T2	Z DIODE			R203	QRA14CF-2703Y	CMF RESISTOR	270kΩ 1/4W F	
D959	1SS133-T2	SI DIODE			R401	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J	
D972	MTZJ15B-T2	Z DIODE			R402	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
D973	1SS133-T2	SI DIODE			R403	QRE121J-180Y	C RESISTOR	18Ω 1/2W J	
△PC921	PC123FY2	PHOTO COUPLER			R404	QRA14CF-6801Y	CMF RESISTOR	6.8kΩ 1/4W F	
C201	QFV21HJ-334Z	MF CAPACITOR	0.33uF 50V J		R405	QRA14CF-6801Y	CMF RESISTOR	6.8kΩ 1/4W F	
C401	QETN1VM-108Z	E CAPACITOR	1000uF 35V M		R406	QRA14CF-1002Y	CMF RESISTOR	10kΩ 1/4W F	
C402	QFN31HJ-152Z	M CAPACITOR	1500pF 50V J		R407	QRA14CF-8200Y	CMF RESISTOR	820Ω 1/4W F	
C403	QCS32HJ-180Z	C CAPACITOR	18pF 500V J		R408	QRA14CF-8200Y	CMF RESISTOR	820Ω 1/4W F	
C404	QFLC2AJ-104Z	M CAPACITOR	0.1uF 100V J		R409	QRL029J-221	OMF RESISTOR	220Ω 2W J	
C405	QFV21HJ-104Z	MF CAPACITOR	0.1uF 50V J		R410	QRT029J-2R2	MF RESISTOR	2.2Ω 2W J	
C406	QETN1VM-107Z	E CAPACITOR	100uF 35V M		R411	QRE121J-8R2Y	C RESISTOR	8.2Ω 1/2W J	
C407	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R412	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
C408	QFLC2AJ-104Z	M CAPACITOR	0.1uF 100V J		R413	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
C409	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R415	QRE141J-154Y	C RESISTOR	150kΩ 1/4W J	
C411	QCB31HK-222Z	C CAPACITOR	2200pF 50V K		R416	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
C412	QENC1CM-226Z	BP E CAPACITOR	22uF 16V M		R418	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C413	QENC1CM-226Z	BP E CAPACITOR	22uF 16V M		R420	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
C416	QCB31HK-682Z	C CAPACITOR	6800pF 50V K		R421	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J	
C417	QETN1VM-107Z	E CAPACITOR	100uF 35V M		R430	QRE121J-101Y	C RESISTOR	100Ω 1/2W J	
C501	QCB32HK-331Z	C CAPACITOR	330pF 500V K		R431	QRE121J-101Y	C RESISTOR	100Ω 1/2W J	
C502	QFN32DK-103	M CAPACITOR	0.01uF 200V K		R432	QRE121J-101Y	C RESISTOR	100Ω 1/2W J	
C503	QFV21HJ-224Z	MF CAPACITOR	0.22uF 50V J		R501	QRE141J-471Y	C RESISTOR	470Ω 1/4W J	
△C506	QFZ0122-452	MPP CAPACITOR	4500pF 1.8kV H		R502	QRE121J-123Y	C RESISTOR	12kΩ 1/2W J	
△C507	QFZ0122-392	MPP CAPACITOR	3900pF 1.8kV H		R503	QRE121J-152Y	C RESISTOR	1.5kΩ 1/2W J	
C508	QFP32JJ-153	PP CAPACITOR	0.015uF 630V J		R504	QRL039J-272	OMF RESISTOR	2.7kΩ 3W J	
△C509	QFZ0128-154	MPP CAPACITOR	0.15uF DC400V H		R505	QRL039J-272	OMF RESISTOR	2.7kΩ 3W J	
△C510	QFZ0197-154	MPP CAPACITOR	0.15uF 250V J		R506	QRE121J-5R6Y	C RESISTOR	5.6Ω 1/2W J	
△C511	QFZ0128-254	MPP CAPACITOR	0.25uF DC400V H		R512	QRL029J-331	OMF RESISTOR	330Ω 2W J	
C513	QE20414-226	BP E CAPACITOR	22uF		R521	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
C514	QCS32HJ-561	C CAPACITOR	560pF 500V J		R522	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
C521	QCZ0122-681	C CAPACITOR	680pF 2kV K		R523	QRE141J-822Y	C RESISTOR	8.2kΩ 1/4W J	
C522	QCZ0122-681	C CAPACITOR	680pF 2kV K		R524	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J	
C523	QFN32AJ-682Z	M CAPACITOR	6800pF 100V J		R525	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C524	QCS31HJ-470Z	C CAPACITOR	47pF 50V J		R526	QRE141J-470Y	C RESISTOR	47Ω 1/4W J	
C525	QCB31HK-682Z	C CAPACITOR	6800pF 50V K		R531	QRL029J-102	OMF RESISTOR	1kΩ 2W J	
C527	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R532	QRL029J-820	OMF RESISTOR	82Ω 2W J	
C533	QCS32HJ-561	C CAPACITOR	560pF 500V J		R533	QRL029J-820	OMF RESISTOR	82Ω 2W J	
C534	QFN32DK-222Z	M CAPACITOR	2200pF 200V K		R534	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C536	QFN32DK-222Z	M CAPACITOR	2200pF 200V K		R535	QRE141J-470Y	C RESISTOR	47Ω 1/4W J	
C562	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		R561	QRA14CF-4701Y	CMF RESISTOR	4.7kΩ 1/4W F	
C591	QE20203-107	E CAPACITOR	100uF 160V M		R562	QRA14CF-5601Y	CMF RESISTOR	5.6kΩ 1/4W F	
C701	QFLC2AJ-273Z	M CAPACITOR	0.027uF 100V J		R565	QRE141J-223Y	C RESISTOR	22kΩ 1/4W J	
C801	QETN1EM-108Z	E CAPACITOR	1000uF 25V M		R591	QRF154K-3R3	UNF WW RESISTOR	3.3Ω 15W K	
C802	QETN1EM-108Z	E CAPACITOR	1000uF 25V M		R701	QRG01GJ-220	OMF RESISTOR	22Ω 1W J	
C803	QETM2EM-336	E CAPACITOR	33uF 250V M		R702	QRE121J-123Y	C RESISTOR	12kΩ 1/2W J	
C811	QETN1VM-107Z	E CAPACITOR	100uF 35V M		R703	QRZ0056-103Z	COMP RESISTOR	10kΩ 1/2W K	
△C902	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K		R901	QRF154K-R51	UNF WW RESISTOR	0.51Ω 15W K	
△C904	QCZ9054-102	C CAPACITOR	1000pF AC250V Z		R902	QRG01GJ-470	OMF RESISTOR	47Ω 1W J	
△C905	QCZ9054-102	C CAPACITOR	1000pF AC250V Z		R903	QRF154K-R51	UNF WW RESISTOR	0.51Ω 15W K	
△C906	QCZ9054-102	C CAPACITOR	1000pF AC250V Z		R910	QRE121J-152Y	C RESISTOR	1.5kΩ 1/2W J	
					R911	QRL029J-183	OMF RESISTOR	18kΩ 2W J	

△Ref No.	Part No.	Part Name	Description	Local
R912	QRT029J-R18	MF RESISTOR	0.18Ω 2W J	
R913	QRT029J-R18	MF RESISTOR	0.18Ω 2W J	
R914	QRK126J-681X	UNF C RESISTOR	680Ω 1/2W J	
R916	QRT029J-R22	MF RESISTOR	0.22Ω 2W J	
R917	QRK126J-332X	UNF C RESISTOR	3.3kΩ 1/2W J	
R918	QRE121J-152Y	C RESISTOR	1.5kΩ 1/2W J	
R920	QRE121J-684Y	C RESISTOR	680kΩ 1/2W J	
R941	QRL039J-333	OMF RESISTOR	33kΩ 3W J	
R944	QRE121J-222Y	C RESISTOR	2.2kΩ 1/2W J	
R951	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
R952	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R953	QRE121J-181Y	C RESISTOR	180Ω 1/2W J	
R954	QRE121J-221Y	C RESISTOR	220Ω 1/2W J	
R955	QRT039J-1R0	MF RESISTOR	1Ω 3W J	
R959	QRE121J-121Y	C RESISTOR	120Ω 1/2W J	
R960	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
R961	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R962	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R963	QRA14CF-4701Y	CMF RESISTOR	4.7kΩ 1/4W F	
R964	QRA14CF-4701Y	CMF RESISTOR	4.7kΩ 1/4W F	
R965	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J	
R966	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
R967	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
R968	QRA14CF-1802Y	CMF RESISTOR	18kΩ 1/4W F	
R972	QRA14CF-1101Y	CMF RESISTOR	1.1kΩ 1/4W F	
R973	QRA14CF-7501Y	CMF RESISTOR	7.5kΩ 1/4W F	
R975	QRE121J-223Y	C RESISTOR	22kΩ 1/2W J	
R977	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
R978	QRE141J-333Y	C RESISTOR	33kΩ 1/4W J	
△R999	QRZ0111-685	C RESISTOR	6.8MΩ 1/2W K	
L501	QQLZ025-180	COIL	18uH	
L502	QQR1230-001	CHOKE COIL		
L504	QQR0915-003	LINEARITY COIL		
L531	QQLZ036-222	COIL	2.2mH J	
L701	QQLZ036-222	COIL	2.2mH J	
L801	QQLZ026-140	COIL	14uH ±7%	
L931	QQL26AK-470Z	COIL	47uH K	
L933	QQL26AK-470Z	COIL	47uH K	
L934	QQLZ018-220	COIL	22uH	
L935	QQL60AK-220	COIL	22uH K	
L936	QQL26AK-220Z	COIL	22uH K	
T501	QQR1111-001	DRIVE TRANSF		
T701	QQR1096-001	DEF TRANSF		
△T921	QQS0133-001	SW TRANSF		
CN001	QGB1506M1-16	CONNECTOR	B-B (1-16)	
CN002	QGB1506M1-16	CONNECTOR	B-B (1-16)	
CN003	QGB1506M1-16	CONNECTOR	B-B (1-16)	
CN010	QGB1505J1-35	CONNECTOR	B-B (1-35)	
△CP934	ICP-N70-T	IC PROTECTOR	2.5A	
△CP936	ICP-N38-Y	IC PROTECTOR	1.5A	
△CP941	ICP-N70-T	IC PROTECTOR	2.5A	
△CP942	ICP-N70-T	IC PROTECTOR	2.5A	
△CP943	ICP-N20-Y	IC PROTECTOR	800mA	
△F905	QMFZ034-5R0Z-J1	FUSE	5A 125V	
△FR801	QRZ9011-1R0	FUSI RESISTOR	1Ω 1/2W J	
△FR802	QRZ9011-1R0	FUSI RESISTOR	1Ω 1/2W J	
△FR811	QRZ9011-4R7	FUSI RESISTOR	4.7Ω 1/2W J	
△FR915	QRZ9017-330	FUSI RESISTOR	33Ω 1/4W J	
H936	CM42862-00J-H	HEAT SINK ASSY		
K401	QQR0621-002Z	FERRITE BEADS		
K501	QQR1139-001	FERRITE BEADS		
K502	QQR1139-001	FERRITE BEADS		
K503	QQR1139-001	FERRITE BEADS		
K504	QQR1139-001	FERRITE BEADS		
K505	QQR1139-001	FERRITE BEADS		
K912	QQR0582-001Z	FERRITE BEADS		
K914	QQR0582-001Z	FERRITE BEADS		
K930	QQR0621-002Z	FERRITE BEADS		
K931	QQR0621-002Z	FERRITE BEADS		
K935	QQR0621-002Z	FERRITE BEADS		
K937	QQR0621-002Z	FERRITE BEADS		
K938	QQR0621-002Z	FERRITE BEADS		
△RY951	QSK0118-001	RELAY		
△RY952	QSK0083-001	RELAY		

R CRT SOCKET PW BOARD ASS'Y (SSB-3168A-M2)

△Ref No.	Part No.	Part Name	Description	Local
△IC3101	TDA6111Q	IC		
D3001	RM2C-LFA1	SI DIODE		
D3101	EU01N-T2	SI DIODE		

△Ref No.	Part No.	Part Name	Description	Local
D3102	1SR124-400A-T2	SI DIODE		
C3002	QETN2EM-106Z	E CAPACITOR	10uF 250V M	
C3006	QFZ9027-472	MM CAPACITOR	4700pF 1000V K	
C3007	QETN2EM-106Z	E CAPACITOR	10uF 250V M	
C3101	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C3102	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C3103	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C3106	QFK62EK-104Z	MM CAPACITOR	0.1uF 250V K	
C3107	NDC31HJ-561X	C CAPACITOR	560pF 50V J	
C3108	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
R3005	QRE121J-105Y	C RESISTOR	1MΩ 1/2W J	
R3006	QRC121K-102Z	COMP RESISTOR	1kΩ 1/2W K	
R3008	QRC121K-152Z	COMP RESISTOR	1.5kΩ 1/2W K	
R3101	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
R3103	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R3104	QRL039J-473	OMF RESISTOR	47kΩ 3W J	
R3106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3107	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3108	QRC121K-561Z	COMP RESISTOR	560Ω 1/2W K	
R3110	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L3002	QQL26AJ-102Z	COIL	1mH J	
CN30RE	QGGZ5004C1-02	CONNECTOR	(1-2)	
CN3RGR	QGA2501C5-06Z	CONNECTOR	W-B (1-6)	
CN3RGN	QJB003-042624	SIN ID C-B WIRE		
CN3RSC	QGGZ0017C1-01Z	CONNECTOR	(1-1)	
H3101	LC31150-002A	HEAT SINK/AL-F/		
SG3001	QAF0056-501Z	SURGE ABSORBER	500V M	
△SK3001	CE42535-001J1	C R T SOCKET		

G CRT SOCKET PW BOARD ASS'Y (SSB-3268A-M2)

△Ref No.	Part No.	Part Name	Description	Local
△IC3101	TDA6111Q	IC		
D3001	RM2C-LFA1	SI DIODE		
D3101	EU01N-T2	SI DIODE		
D3102	1SR124-400A-T2	SI DIODE		
C3001	QETN2EM-106Z	E CAPACITOR	10uF 250V M	
C3002	QETN2EM-106Z	E CAPACITOR	10uF 250V M	
C3003	QFLC1HJ-223Z	M CAPACITOR	0.022uF 50V J	
C3006	QFZ9027-472	MM CAPACITOR	4700pF 1000V K	
C3007	QETN2EM-106Z	E CAPACITOR	10uF 250V M	
C3101	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C3102	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C3103	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C3105	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C3106	QFK62EK-104Z	MM CAPACITOR	0.1uF 250V K	
C3107	NDC31HJ-561X	C CAPACITOR	560pF 50V J	
C3108	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
R3001	NRSA63D-123X	MG RESISTOR	12kΩ 1/16W D	
R3002	NRSA63D-223X	MG RESISTOR	22kΩ 1/16W D	
R3003	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D	
R3005	QRE121J-105Y	C RESISTOR	1MΩ 1/2W J	
R3006	QRC121K-102Z	COMP RESISTOR	1kΩ 1/2W K	
R3008	QRC121K-152Z	COMP RESISTOR	1.5kΩ 1/2W K	
R3101	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
R3102	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	
R3103	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R3104	QRL039J-473	OMF RESISTOR	47kΩ 3W J	
R3106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3107	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3108	QRC121K-561Z	COMP RESISTOR	560Ω 1/2W K	
R3110	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L3001	QQL26AJ-102Z	COIL	1mH J	
L3002	QQL26AJ-102Z	COIL	1mH J	
L3101	QQL244K-5R6Z	COIL	5.6uH K	
CN300A	QGA2501C5-04Z	CONNECTOR	W-B (1-4)	
CN300E	QGA2501C1-10	CONNECTOR	W-B (1-10)	
CN300V	QGA2501C5-03Z	CONNECTOR	W-B (1-3)	
CN30GE	QGGZ5004C1-02	CONNECTOR	(1-2)	
CN3GBK	QGA2501C5-06Z	CONNECTOR	W-B (1-6)	
CN3GBN	QGA2501C5-04Z	CONNECTOR	W-B (1-4)	
CN3GSC	QGGZ0017C1-01Z	CONNECTOR	(1-1)	
CN3RGR	QJB003-062211	SIN ID C-B WIRE		
CN3RGN	QGA2501C5-04Z	CONNECTOR	W-B (1-4)	
H3101	LC31150-002A	HEAT SINK/AL-F/		

△Ref No.	Part No.	Part Name	Description	Local
SG3001	QAF0056-501Z	SURGE ABSORBER	500V M	
△SK3001	CE42535-001J1	C R T SOCKET		

## B CRT SOCKET PW BOARD ASS'Y (SSB-3368A-M2)

△Ref No.	Part No.	Part Name	Description	Local
△IC3101	TDA6111Q	IC		
Q3031	2SA1037AK/QR/-X	TRANSISTOR		
D3001	RM2C-LFA1	SI DIODE		
D3101	EU01N-T2	SI DIODE		
D3102	1SR124-400A-T2	SI DIODE		
D3103	MA111-X	SI DIODE		
C3002	QETN2EM-106Z	E CAPACITOR	10uF 250V M	
C3006	QFZ9027-472	MM CAPACITOR	4700pF 1000V K	
C3007	QETN2EM-106Z	E CAPACITOR	10uF 250V M	
C3101	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C3102	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C3103	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C3105	NDC31HJ-270X	C CAPACITOR	27pF 50V J	
C3106	QFK62EK-104Z	MM CAPACITOR	0.1uF 250V K	
C3107	NDC31HJ-561X	C CAPACITOR	560pF 50V J	
C3108	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C3109	NDC31HJ-270X	C CAPACITOR	27pF 50V J	
R3005	QRE121J-105Y	C RESISTOR	1MΩ 1/2W J	
R3006	QRC121K-102Z	COMP RESISTOR	1kΩ 1/2W K	
R3008	QRC121K-152Z	COMP RESISTOR	1.5kΩ 1/2W K	
R3031	NRSA63D-123X	MG RESISTOR	12kΩ 1/16W D	
R3032	NRSA63D-562X	MG RESISTOR	5.6kΩ 1/16W D	
R3033	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R3101	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
R3102	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R3103	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R3104	QRL039J-473	OMF RESISTOR	47kΩ 3W J	
R3105	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
R3106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3107	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3108	QRC121K-561Z	COMP RESISTOR	560Ω 1/2W K	
R3110	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
L3002	QQL26AJ-102Z	COIL	1mH J	
L3101	QQL244K-5R6Z	COIL	5.6uH K	
CN30BE	QGZ5004C1-02	CONNECTOR	(1-2)	
CN3BSC	QGZ0017C1-01Z	CONNECTOR	(1-1)	
CN3GBK	QJB003-062211	SIN ID C-B WIRE		
CN3GBN	QJB003-042624	SIN ID C-B WIRE		
H3101	LC31150-002A	HEAT SINK/AL-F/		
SG3001	QAF0056-501Z	SURGE ABSORBER	500V M	
△SK3001	CE42535-001J1	C R T SOCKET		

## CONVERGENCE OUT PW BOARD ASS'Y (SSB-5068A-M2)

△Ref No.	Part No.	Part Name	Description	Local
IC801	L7805CP	IC		
IC803	L7805CP	IC		
IC804	STK392-110	IC		
IC805	STK392-110	IC		
Q801	2SC3852A	POW TRANSISTOR		
Q802	2SA673/C/-T	TRANSISTOR		
Q803	2SA673/C/-T	TRANSISTOR		
Q806	2SD601A/QR/-X	TRANSISTOR		
Q807	2SD601A/QR/-X	TRANSISTOR		
Q808	2SD601A/QR/-X	TRANSISTOR		
Q809	2SD601A/QR/-X	TRANSISTOR		
Q810	2SD601A/QR/-X	TRANSISTOR		
D804	1SR153-400-T2	FR DIODE		
D805	1SR153-400-T2	FR DIODE		
D816	RD33E/B2/-T2	Z DIODE		
D817	RD33E/B2/-T2	Z DIODE		
D818	RD33E/B2/-T2	Z DIODE		
D819	RD33E/B2/-T2	Z DIODE		
D820	RD33E/B2/-T2	Z DIODE		
D821	RD33E/B2/-T2	Z DIODE		
D822	RD33E/B2/-T2	Z DIODE		

△Ref No.	Part No.	Part Name	Description	Local
D823	RD33E/B2/-T2	Z DIODE		
D824	RD33E/B2/-T2	Z DIODE		
D825	RD33E/B2/-T2	Z DIODE		
D826	RD33E/B2/-T2	Z DIODE		
D827	RD33E/B2/-T2	Z DIODE		
D828	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
D839	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
D841	PTZ6.8B-X	Z DIODE		
D842	PTZ6.8B-X	Z DIODE		
D843	PTZ6.8B-X	Z DIODE		
C801	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C802	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C803	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C804	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C805	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C806	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C807	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C808	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C809	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C810	QETN1EM-107Z	E CAPACITOR	100uF 25V M	
C812	NDC31HJ-181X	C CAPACITOR	180pF 50V J	
C813	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C814	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C818	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C819	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C820	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C821	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C822	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C823	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C824	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C825	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C827	QETN1HM-477Z	E CAPACITOR	470uF 50V M	
C828	QETN1HM-477Z	E CAPACITOR	470uF 50V M	
C829	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C830	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C831	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C832	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C833	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C834	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C838	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C843	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
R801	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
R802	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
R803	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
R804	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
R805	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
R806	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
R807	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
R808	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
R809	QRE121J-471Y	C RESISTOR	470Ω 1/2W J	
R810	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
R812	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R813	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R818	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R828	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R829	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R830	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R831	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R832	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R833	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R834	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R835	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R836	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R837	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R838	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R839	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R840	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R842	QRX01GJ-2R2	MF RESISTOR	2.2Ω 1W J	
R843	QRL029J-221	OMF RESISTOR	220Ω 2W J	
R844	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R846	QRX01GJ-1R5	MF RESISTOR	1.5Ω 1W J	
R847	QRL029J-151	OMF RESISTOR	150Ω 2W J	
R848	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R850	QRX01GJ-2R2	MF RESISTOR	2.2Ω 1W J	
R851	QRL029J-221	OMF RESISTOR	220Ω 2W J	
R852	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R854	QRX01GJ-1R5	MF RESISTOR	1.5Ω 1W J	
R855	QRL029J-151	OMF RESISTOR	150Ω 2W J	
R856	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R858	QRX01GJ-3R3	MF RESISTOR	3.3Ω 1W J	
R859	QRL029J-221	OMF RESISTOR	220Ω 2W J	
R860	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R862	QRX01GJ-1R8	MF RESISTOR	1.8Ω 1W J	
R863	QRL029J-151	OMF RESISTOR	150Ω 2W J	
R864	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	

△Ref No.	Part No.	Part Name	Description	Local
R866	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R867	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
L802	QQL521J-470	COIL	47uH J	
CN011	QGB2501J1-15	CONNECTOR	B-B (1-15)	
CN012	QGB2501J1-15	CONNECTOR	B-B (1-15)	
K801	QQR0621-002Z	FERRITE BEADS		
K802	QQR0621-002Z	FERRITE BEADS		
K803	QQR0621-002Z	FERRITE BEADS		
K804	QQR0621-002Z	FERRITE BEADS		
K805	QQR0621-002Z	FERRITE BEADS		
K806	QQR0621-002Z	FERRITE BEADS		
K807	QQR0621-002Z	FERRITE BEADS		
K808	QQR0621-002Z	FERRITE BEADS		
K809	QQR0621-002Z	FERRITE BEADS		
K810	QQR0621-002Z	FERRITE BEADS		
K811	QQR0621-002Z	FERRITE BEADS		

VM PW BOARD ASS'Y (SSB-7268A-M2)

△Ref No.	Part No.	Part Name	Description	Local
Q7101	2SD601A/QR/-X	TRANSISTOR		
Q7102	2SC1627A/OY/-T	TRANSISTOR		
Q7105	2SA1837	POW TRANSISTOR		
Q7106	2SC4793	POW TRANSISTOR		
D7101	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
D7102	RH1S-T3	SI DIODE		
D7103	RH1S-T3	SI DIODE		
C7001	QETN2CM-106Z	E CAPACITOR	10uF 160V M	
C7101	QCB31HK-103Z	C CAPACITOR	0.01uF 50V K	
C7102	NDC31HJ-821X	C CAPACITOR	820pF 50V J	
C7103	QETN1HM-335Z	E CAPACITOR	3.3uF 50V M	
C7105	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C7112	QCB32HK-472Z	C CAPACITOR	4700pF 500V K	
C7113	QCB32HK-472Z	C CAPACITOR	4700pF 500V K	
C7114	QETN1AM-107Z	E CAPACITOR	100uF 10V M	
C7115	QETN1AM-107Z	E CAPACITOR	100uF 10V M	
C7116	QETN1AM-337Z	E CAPACITOR	330uF 10V M	
C7117	QETN2CM-106Z	E CAPACITOR	10uF 160V M	
R7101	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
R7102	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
R7103	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R7104	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	
R7105	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J	
R7106	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
R7107	QRG01GJ-101	OMF RESISTOR	100Ω 1W J	
R7112	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R7113	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R7114	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
R7115	QRE121J-563Y	C RESISTOR	56kΩ 1/2W J	
R7116	QRE121J-563Y	C RESISTOR	56kΩ 1/2W J	
R7117	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
R7118	NRSA63J-390X	MG RESISTOR	39Ω 1/16W J	
R7119	QRE121J-2R7Y	C RESISTOR	2.7Ω 1/2W J	
R7120	QRE121J-2R7Y	C RESISTOR	2.7Ω 1/2W J	
R7121	NRSA63J-390X	MG RESISTOR	39Ω 1/16W J	
R7122	NRSA63J-121X	MG RESISTOR	120Ω 1/16W J	
R7123	QRL029J-681	OMF RESISTOR	680Ω 2W J	
CN700V	QJB003-031413	SIN ID C-B WIRE		
CN70VB	QGA2501C5-03Z	CONNECTOR	W-B (1-3)	
CN70VG	QGA2501C5-03Z	CONNECTOR	W-B (1-3)	
CN70VR	QGA2501C5-03Z	CONNECTOR	W-B (1-3)	
△FR7001	QRZ9021-561	FUSI RESISTOR	560Ω 1W J	
K7101	CE41492-001Z	CHOKE COIL		
K7103	CE41492-001Z	CHOKE COIL		
K7104	CE41492-001Z	CHOKE COIL		
Y7101	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
Y7102	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

REMOCON SENSOR PW BOARD ASS'Y (SSB-8068A-M2)

△Ref No.	Part No.	Part Name	Description	Local
IC8001	GP1U281Q	IR DETECT UNIT	38kHz	
D8001	MA3068/M/-X	Z DIODE		
C8001	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C8002	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
R8001	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8003	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R8004	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	

LINE FILTER PW BOARD ASS'Y (SSB-9068A-M2)

△Ref No.	Part No.	Part Name	Description	Local
D9911	1SR35-400A-T2	SI DIODE		
D9912	1SR35-400A-T2	SI DIODE		
D9913	1SR35-400A-T2	SI DIODE		
D9914	1SR35-400A-T2	SI DIODE		
D9921	1SR35-400A-T2	SI DIODE		
△C9901	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	
△C9902	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	
△C9903	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	
C9911	QETN1CM-108Z	E CAPACITOR	1000uF 16V M	
C9921	QETM1HM-108	E CAPACITOR	1000uF 50V M	
△R9901	QRZ9041-275	C RESISTOR	2.7MΩ 1/2W K	
R9911	QRE121J-5R6Y	C RESISTOR	5.6Ω 1/2W J	
△T9911	QQT0382-001	POWER TRANSF		
△F9901	QMF61U1-7R0-S	FUSE	7A AC125V	
△LF9901	QQR0972-002	LINE FILTER		
△LF9902	QQR0972-002	LINE FILTER		
△LF9903	QQR1281-001	LINE FILTER		
△VA9901	ERZV10V621CS	ZNR		

DEF OSC PW BOARD ASS'Y (SSB0H068A-M2)

△Ref No.	Part No.	Part Name	Description	Local
IC101	LA7860M-X	IC		
IC102	BA12FP-X	IC		
IC161	AN5441SA-W	IC		
IC162	BA10393F-XE	IC		
IC212	CXA1875AM-X	IC		
Q101	2SD601A/QR/-X	TRANSISTOR		
Q102	2SD601A/QR/-X	TRANSISTOR		
Q131	2SD601A/QR/-X	TRANSISTOR		
Q132	2SD601A/QR/-X	TRANSISTOR		
Q162	2SD601A/QR/-X	TRANSISTOR		
Q167	2SD601A/QR/-X	TRANSISTOR		
Q168	2SD601A/QR/-X	TRANSISTOR		
Q751	2SD601A/QR/-X	TRANSISTOR		
Q752	2SD601A/QR/-X	TRANSISTOR		
Q753	2SC4632	POW TRANSISTOR		
D164	1SS355-X	SI DIODE		
D165	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
D221	1SS355-X	SI DIODE		
D321	1SS355-X	SI DIODE		
D751	ES1F-LFG2	SI DIODE		
D752	ES1F-LFG2	SI DIODE		
C102	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C103	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C104	NDC31HJ-561X	C CAPACITOR	560pF 50V J	
C106	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C107	NDC21HJ-122X	C CAPACITOR	1200pF 50V J	
C108	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C109	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C110	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C111	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
C112	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
C113	NDC21HJ-122X	C CAPACITOR	1200pF 50V J	
C114	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C115	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C116	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	

△Ref No.	Part No.	Part Name	Description	Local	△Ref No.	Part No.	Part Name	Description	Local
C117	QTMN1CM-477Z	E CAPACITOR	470uF 16V M		R174	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C118	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R175	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C119	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R176	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C120	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R177	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
C121	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R178	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
C122	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R179	NRVA63D-562X	CMF RESISTOR	5.6kΩ 1/16W D	
C123	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R180	NRSA63D-152X	MG RESISTOR	1.5kΩ 1/16W D	
C124	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R182	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C131	NDC31HJ-101X	C CAPACITOR	100pF 50V J		R183	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C132	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R184	NRSA63D-473X	MG RESISTOR	47kΩ 1/16W D	
C133	NCB21EK-124X	C CAPACITOR	0.12uF 25V K		R185	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	
C134	NCB31EK-273X	C CAPACITOR	0.027uF 25V K		R186	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C135	NDC31HJ-102X	C CAPACITOR	1000pF 50V J		R187	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
C136	NDC31HJ-102X	C CAPACITOR	1000pF 50V J		R188	NRSA63D-101X	MG RESISTOR	100Ω 1/16W D	
C137	NDC31HJ-102X	C CAPACITOR	1000pF 50V J		R189	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C138	NDC31HJ-151X	C CAPACITOR	150pF 50V J		R190	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	
C161	QETN1CM-108Z	E CAPACITOR	1000uF 16V M		R216	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
C162	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R217	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
C163	QETN1AM-477Z	E CAPACITOR	470uF 10V M		R223	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C164	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R224	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C182	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R226	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C212	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R227	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C221	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R230	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
C321	NCB31HK-102X	C CAPACITOR	1000pF 50V K		R321	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C751	QFLC1HJ-563Z	M CAPACITOR	0.056uF 50V J		R326	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
C752	QETN1VM-476Z	E CAPACITOR	47uF 35V M		R327	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
C753	QFZ0200-153	MPP CAPACITOR	0.015uF 1.5kV H		R328	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
C761	QFZ0122-682	MPP CAPACITOR	6800pF 1.8kV H		R329	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
C762	QCZ0122-471	C CAPACITOR	470pF 2kV K		R330	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J	
C763	QCZ0122-471	C CAPACITOR	470pF 2kV K		R751	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
C0165	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R752	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C0166	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R753	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	
C0167	NCB31HK-332X	C CAPACITOR	3300pF 50V K		R754	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
C0168	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R755	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
C0169	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R756	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	
C0170	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R757	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
C0171	QFV21HJ-184AZ	MF CAPACITOR	1.84F 50V J		R761	QRE121J-184Y	C RESISTOR	180kΩ 1/2W J	
C0172	QFV21HJ-394AZ	MF CAPACITOR	3.94F 50V J		R762	QRE121J-184Y	C RESISTOR	180kΩ 1/2W J	
C0173	NCB31HK-153X	C CAPACITOR	0.015uF 50V K		R763	QRE121J-184Y	C RESISTOR	180kΩ 1/2W J	
C0174	NCB31HK-272X	C CAPACITOR	2700pF 50V K		R764	QRE121J-184Y	C RESISTOR	180kΩ 1/2W J	
C0175	NCB31HK-152X	C CAPACITOR	1500pF 50V K		R765	QRE121J-184Y	C RESISTOR	180kΩ 1/2W J	
C0176	QFV21HJ-184AZ	MF CAPACITOR	1.84F 50V J		L101	QQL01BK-470Z	P COIL	47uH K	
C0178	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		L103	NQL092K-100X	P COIL	10uH K	
C0179	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		L104	NQL092K-100X	P COIL	10uH K	
C0180	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		L105	QQL01BK-101Z	P COIL	100uH K	
C0181	NCB31CK-104X	C CAPACITOR	0.1uF 16V K						
R101	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		CN010	QGB1505K1-35	CONNECTOR	B-B (1-35)	
R103	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J		W001	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R104	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		W002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R105	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J		W003	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R106	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J		W004	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R107	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		W005	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R109	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J		W006	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R110	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		W007	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R111	NRSA63D-153X	MG RESISTOR	15kΩ 1/16W D		W008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R112	NRSA63D-182X	MG RESISTOR	1.8kΩ 1/16W D		W009	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R113	NRSA63D-123X	MG RESISTOR	12kΩ 1/16W D		W010	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R114	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		W012	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R116	NRSA63D-182X	MG RESISTOR	1.8kΩ 1/16W D		W013	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R117	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J		W014	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R120	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J		W015	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R121	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J		W016	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R122	QRG01GJ-470	OMF RESISTOR	47Ω 1W J		W017	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R123	QRK126J-101X	UNF C RESISTOR	100Ω 1/2W J		W018	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R126	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		W019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R127	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		W020	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R129	NRSA63D-183X	MG RESISTOR	18kΩ 1/16W D		W021	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R131	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		W022	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R133	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J		W023	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R134	NRSA63J-334X	MG RESISTOR	330kΩ 1/16W J		W024	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R137	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		Y001	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R139	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		Y002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R140	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		Y003	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R141	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		Y004	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R142	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		Y007	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R143	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J		Y008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R161	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J						
R162	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J						
R163	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J						
R164	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J						
R167	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J						
R168	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J						
R169	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J						
R170	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J						
R171	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J						
R172	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J						

RECEIVER PW BOARD ASS'Y (SSB0R368A-M2)

△Ref No.	Part No.	Part Name	Description	Local
IC0201	CXA2134Q-X	IC		
IC0501	BA4558F-X	IC		
IC0531	BA4558F-X	IC		
IC0561	TC4066BP/N/	IC(DIGITAL)		
IC0701	M62320FP-X	IC		
Q0101	2SD601A/QR/-X	TRANSISTOR		
Q0531	2SD601A/QR/-X	TRANSISTOR		
Q0532	2SB709A/QR/-X	TRANSISTOR		
Q0561	2SB709A/QR/-X	TRANSISTOR		
Q0562	2SD601A/QR/-X	TRANSISTOR		
Q0563	2SB709A/QR/-X	TRANSISTOR		
Q0564	2SD601A/QR/-X	TRANSISTOR		
Q0565	DTC124EKA-X	DIGI TRANSISTOR		
Q0566	DTC124EKA-X	DIGI TRANSISTOR		
Q0601	2SC3311A/QR/-T	TRANSISTOR		
Q0602	2SC3311A/QR/-T	TRANSISTOR		
Q0701	2SD601A/QR/-X	TRANSISTOR		
Q0702	2SB709A/QR/-X	TRANSISTOR		
D0201	UDZS8.2B-X	Z DIODE		
D0202	UDZS8.2B-X	Z DIODE		
D0531	UDZS10B-X	Z DIODE		
D0561	UDZS10B-X	Z DIODE		
D0562	UDZS10B-X	Z DIODE		
D0563	1SS355-X	SI DIODE		
D0601	1SS355-X	SI DIODE		
D0602	1SS355-X	SI DIODE		
D0701	1SS355-X	SI DIODE		
C0102	QETN1CM-477Z	E CAPACITOR	470uF 16V M	
C0103	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C0201	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	
C0202	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C0203	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	
C0204	NCB31HK-562X	C CAPACITOR	5600pF 50V K	
C0205	NCB31HK-123X	C CAPACITOR	0.012uF 50V K	
C0206	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C0207	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C0208	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C0209	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C0210	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C0211	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	
C0212	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C0213	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	
C0214	NCB31HK-272X	C CAPACITOR	2700pF 50V K	
C0215	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	
C0216	QETN1HM-335Z	E CAPACITOR	3.3uF 50V M	
C0217	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	
C0218	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C0219	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C0220	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C0221	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	
C0222	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	
C0223	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C0224	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	
C0225	NCB31HK-472X	C CAPACITOR	4700pF 50V K	
C0226	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	
C0227	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	
C0228	NCB31HK-472X	C CAPACITOR	4700pF 50V K	
C0501	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C0502	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C0503	QENC1HM-105Z	BP E CAPACITOR	1uF 50V M	
C0504	QENC1HM-105Z	BP E CAPACITOR	1uF 50V M	
C0531	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C0532	NCB31EK-393X	C CAPACITOR	0.039uF 25V K	
C0533	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C0534	NCB31HK-183X	C CAPACITOR	0.018uF 50V K	
C0535	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C0536	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M	
C0537	QENC1HM-106Z	BP E CAPACITOR	10uF 50V M	
C0561	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M	
C0562	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M	
C0563	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C0601	QEZO206-335Z	BP E CAPACITOR	3.3uF 50V M	
C0602	QEZO206-335Z	BP E CAPACITOR	3.3uF 50V M	
C0701	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C0702	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C0703	NDC31HJ-820X	C CAPACITOR	82pF 50V J	
C0704	NDC31HJ-820X	C CAPACITOR	82pF 50V J	
R0102	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0106	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0107	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0108	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

△Ref No.	Part No.	Part Name	Description	Local
R0109	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R0110	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0111	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0112	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R0113	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0114	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0201	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R0202	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R0203	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R0204	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R0205	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R0206	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R0208	NRSA63F-623X	MG RESISTOR	62kΩ 1/16W F	
R0209	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R0210	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R0211	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R0213	NRSA63J-302X	MG RESISTOR	3kΩ 1/16W J	
R0214	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	
R0501	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R0502	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R0503	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
R0504	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
R0505	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
R0506	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0507	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
R0508	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0531	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R0532	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R0533	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R0534	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R0535	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R0536	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0537	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0538	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0539	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0540	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R0541	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R0542	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0543	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0544	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0561	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R0562	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R0563	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	
R0564	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	
R0565	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R0566	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R0567	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0568	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R0569	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0570	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R0573	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R0574	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R0575	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R0577	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0579	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0580	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R0601	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R0602	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R0603	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R0604	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R0605	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0606	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0608	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0609	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0701	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R0702	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R0703	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R0704	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0705	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0706	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R0707	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0708	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R0709	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R0710	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R0711	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
L0102	QRN143J-0R0X	C RESISTOR	0Ω 1/4W J	
CN0005	QGB1505K1-15	CONNECTOR	B-B (1-15)	
CN0006	QGB1505K1-35	CONNECTOR	B-B (1-35)	
CN000M	QJB003-042834	SIN ID C-B WIRE		
J0501	QNN0550-001	PIN JACK	VARI/FIX OUT	
J0601	CEMT019-001	SP TERMINAL	SUB WOOFER OUT	
RY0601	QSK0133-001	RELAY		
RY0602	QSK0133-001	RELAY		
△TU0102	QAU0303-001	TUNER	SUB	
UD0102	QAU0283-001	RF SPLITTER	75Ω 44MHz-872MHz	




△Ref No.	Part No.	Part Name	Description	Local
Y0001	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
Y0002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

# **FRONT CONTROL PW BOARD ASS'Y (SSB0L068A-M2)**


△Ref No.	Part No.	Part Name	Description	Local
IC0702	MM1437AF-X	IC		
Q0701	2SC2412K/QR/-X	TRANSISTOR		
Q0702	2SC2412K/QR/-X	TRANSISTOR		
D0402	UDZS10B-X	Z DIODE		
D0403	UDZS10B-X	Z DIODE		
D0404	UDZS10B-X	Z DIODE		
D0405	UDZS10B-X	Z DIODE		
D0406	UDZS10B-X	Z DIODE		
D0701	SELU5E20C	LED		
D0735	UDZS10B-X	Z DIODE		
C0442	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C0443	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C0444	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C0445	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C0446	QFLC1HJ-103Z	M CAPACITOR	0.01uF 50V J	
C0711	QETN1CM-336Z	E CAPACITOR	33uF 16V M	
C0712	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C0713	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
R0401	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R0402	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R0403	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
R0404	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R0405	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	
R0406	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0411	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0412	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0413	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0414	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0415	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0416	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0417	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0418	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0419	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0420	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0702	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0703	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R0706	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R0707	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R0708	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R0711	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R0712	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R0732	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
R0748	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R0749	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
R0750	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R0751	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
J0401	QNZ0438-001	AV JACK	S VIDEO	
S0701	QSW0619-003Z	TACT SWITCH	POWER	
S0702	QSW0619-003Z	TACT SWITCH	MENU	
S0703	QSW0619-003Z	TACT SWITCH	CH -	
S0704	QSW0619-003Z	TACT SWITCH	CH +	
S0705	QSW0619-003Z	TACT SWITCH	VOL -	
S0706	QSW0619-003Z	TACT SWITCH	VOL +	
S0707	QSW0619-003Z	TACT SWITCH	POWER	
W0010	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0011	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0012	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0013	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0014	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0015	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0016	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0017	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0018	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0020	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0021	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0022	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0023	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0024	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0025	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0026	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0026	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

△Ref No.	Part No.	Part Name	Description	Local
W0027	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0028	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0029	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0030	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0032	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0033	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0035	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
W0036	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
Y0401	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
Y0402	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
Y0410	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
Y0411	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

FRONT RELAY PW BOARD ASS'Y (SSB0L268A-M2)

 Ref.No.	Part No.	Part Name	Description	Local
CN000G CN000H	QGF1201C2-17 QGF1201C2-13	CONNECTOR CONNECTOR	FFC/FPC (1-17) FFC/FPC (1-13)	

DIGITAL INPUT MODULE PW BOARD ASS'Y  
(48WP74CP-S) [AV-48WP74]  
(56WP74CP-S) [AV-56WP74]

 Ref.No.	Part No.	Part Name	Description	Local
	48WP74CP-S 56WP74CP-S	DIGITAL INPUT MODULE PWB DIGITAL INPUT MODULE PWB		AV-48WP74 AV-56WP74


DIGITAL CONVERGENCE MODULE PW BOARD ASS'Y  
(SSB0K070A-M2) [AV-48WP74]  
(SSB0K069A-M2) [AV-56WP74]


 Ref.No.	Part No.	Part Name	Description	Local
	SSB0K069A-M2 SSB0K070A-M2	DIGITAL CONVERGENCE MODULE PWB DIGITAL CONVERGENCE MODULE PWB		AV-48WP74 AV-56WP74

MI-COM & DIST MODULE PW BOARD ASS'Y  
(SSB0D070A-M2) [AV-48WP74]  
(SSB0D069A-M2) [AV-56WP74]


 Ref.No.	Part No.	Part Name	Description	Local
	SSB0D069A-M2 SSB0D070A-M2	MI-COM & DIST MODULE PWB MI-COM & DIST MODULE PWB		AV-48WP74 AV-56WP74

REMOTE CONTROL UNIT PARTS LIST (RM-C1200G-1H)

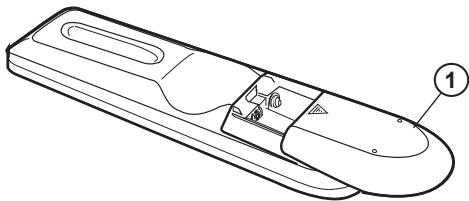

 Ref.No.	Part No.	Part Name	Description	Local
1	UR77EC1403A	BATTERY COVER		

# PACKING

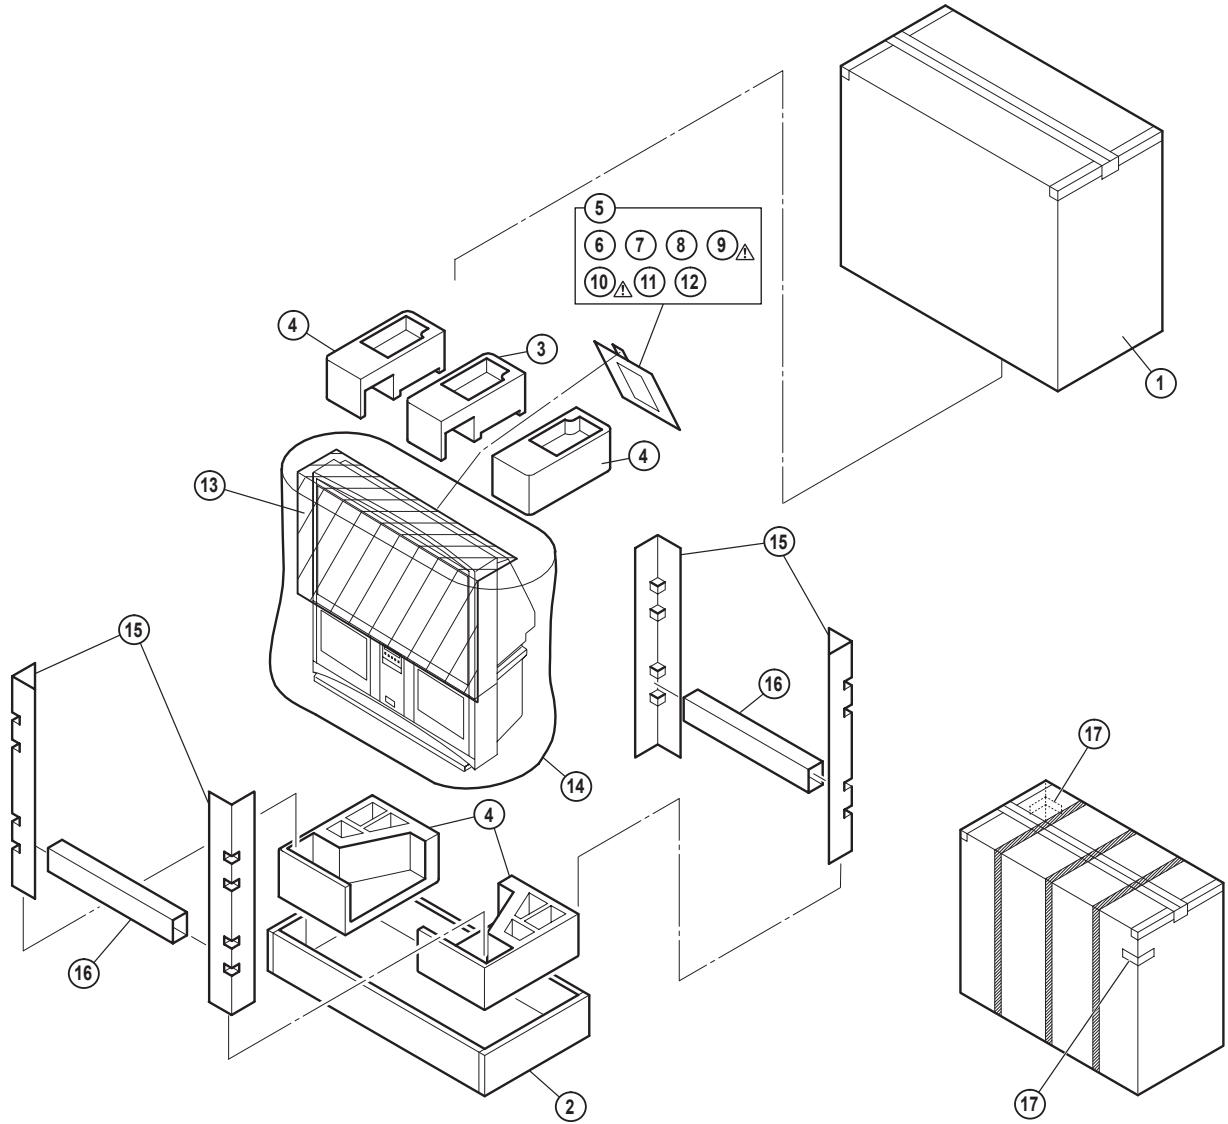

## PACKING PARTS LIST

△	Ref.No.	Part No.	Part Name	Description	Local
	1	LC11252-004A-A	PACKING CASE		AV-48WP74
	1	LC11252-005A-A	PACKING CASE		AV-56WP74
	2	LC31759-001B-A	BOTTOM CASE		AV-48WP74
	2	LC31759-002A-A	BOTTOM CASE		AV-56WP74
	3	GQ10057-001A-A	TOP CUSHION		AV-48WP74
	3	GQ10054-001A-A	TOP CUSHION		AV-56WP74
	4	LC11254-002B-A	CUSHION ASSY	4pcs in 1set	AV-48WP74
	4	LC11410-002B-A	CUSHION ASSY	4pcs in 1set	AV-56WP74
	5	QPA02503505	POLY BAG	25cm x 35cm	
	6	GQ40028-001A-A	INSERT SHEET		
	7		BATTERY	AA(x2)	
	8	RM-C1200G-1H	REMOCON UNIT		
△	9	LCT1282-001A-A	INST BOOK	English	
△	10	LCT1283-001A-A	INST BOOK	French	
	11	BT-51028-2Q	REGISTRATION CARD		
	12	BT-52006-1Q	WARRANTY CARD		
	13	CP30055-007-A	TOP COVER		
	14	CP30056-010-A	POLY BAG		AV-48WP74
	14	CP30056-011-A	POLY BAG		AV-56WP74
	15	LC31761-001B-A	PAD	(x4)	AV-48WP74
	15	LC31956-001B-A	PAD	(x4)	AV-56WP74
	16	LC32083-001B-A	PROTECT PAD	(x2)	AV-56WP74
	17	GQ30037-001A-A	CORNER LABEL	2pcs in 1set	