


3. Exploded View & Parts List

3-1 SPP4231KX/XAA

Yon can search for the updated part code through ITSELF web site.
URL:<http://itself.sec.samsung.co.kr>

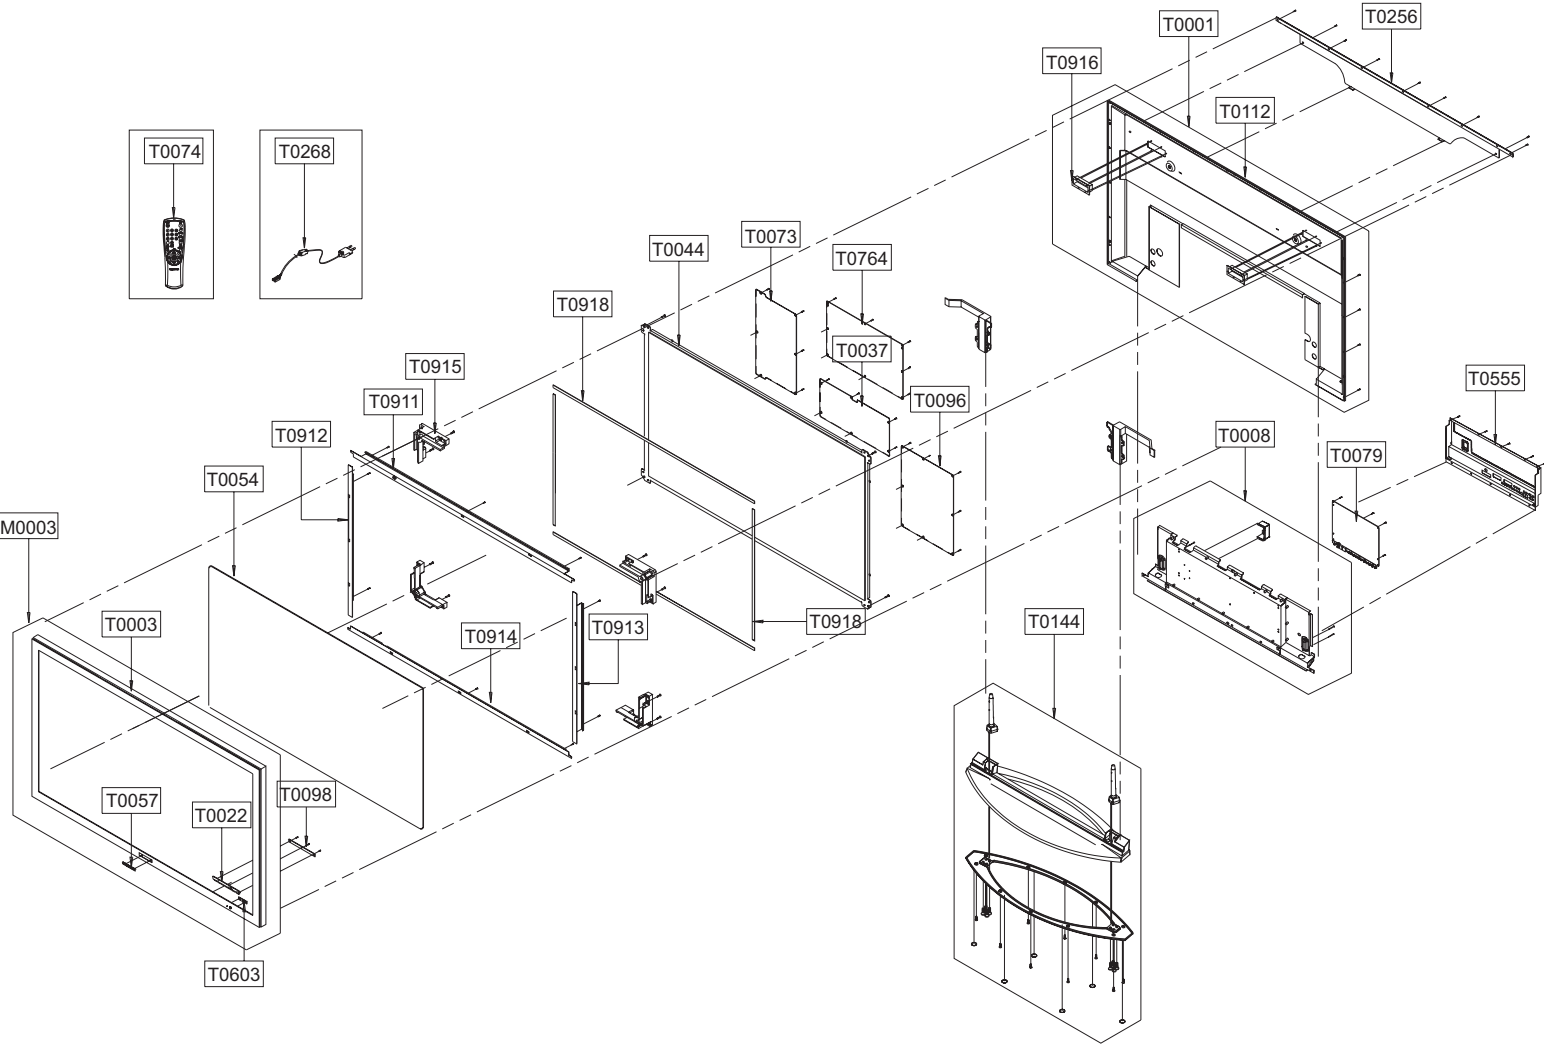

| Loc.No. | Code No | Description;Specification | Q'ty | S.N.A |
|---------|-------------|---|------|-------|
| M0003 | BN96-01207A | ASSY COVER P-FRONT;42D4,SEA,HIPS V0,BLK | 1 | |
| T0003 | BN64-00280A | CABINET FRONT;42D4,HIPS,V0,BKM1326+SV012 | 1 | S.N.A |
| T0057 | BP64-00177A | BADGE-BRAND;ALL,AL,T1.5,70,11.3,BLK,SILI | 1 | S.N.A |
| T0022 | BN64-00281A | KNOB CONTROL;42D4,ABS,HB,BLK | 1 | S.N.A |
| T0603 | BN64-00282A | WINDOW-RMC;;PMMA CLEAR | 1 | S.N.A |
| T0098 | BN94-00607A | ASSY PCB MISC-CONTROL;PS42D4/42V4,D65C,N | 1 | |
| T0456 | BN67-00128A | GLASS-FILTER EMI;42V3,Sputter,44%,984*58 | 1 | S.N.A |
| T0911 | BN61-00244G | BRACKET-FILTER TOP ASSY;BRACKET-FILTER-TO | 1 | S.N.A |
| T0912 | BN61-00245J | BRACKET-FILTER SIDE L;BRKT-FILTER SIDE L | 1 | S.N.A |
| T0913 | BN61-00309F | BRACKET-FILTER SIDE R;BRKT-FILTER SIDE R | 1 | S.N.A |
| T0914 | BN61-00246F | BRACKET-FILTER BOTTOM ASSY;BRKT FILER BO | 1 | S.N.A |
| T0915 | BN61-00141A | HOLDER-MODULE;42P3,AL,DIECASTING | 4 | S.N.A |
| T0918 | AA60-00110G | SPACER-FILTER;42P3,P/U FROM,560,5,6 | 1 | S.N.A |
| T0918 | AA60-00110H | SPACER-FILTER;42P3,P/U FROM,960,5,6 | 1 | S.N.A |
| T0044 | BN96-01502A | ASSY PDP P-MODULE;M3,S42SD-YD,PPS GUIDE | 1 | S.N.A |
| T0144 | BN96-01208B | ASSY COVER P-STAND BASE;42D4,AL5052,T1.2 | 1 | |
| T0764 | BN96-01217A | ASSY MISC P-SMPS;SPP4231,PS42D4S,110~240 | 1 | |
| T0073 | BN96-00870A | ASSY PDP P-X MAIN BOARD;M3,S42SD-YD,D65A | 1 | |
| T0096 | BN96-01211A | ASSY PDP P-Y MAIN BOARD;M3,S42SD-YD,V3,4 | 1 | |
| T0037 | BN96-01212A | ASSY PDP P-L MAIN BOARD;M3,S42SD-YD,V3,4 | 1 | |
| T0008 | BN96-00313E | ASSY COVER P-BACK SUB;SPP4231,ASSY C/BAC | 1 | S.N.A |
| T0079 | BN94-00521C | ASSY PCB MISC-MAIN;;SP-P4231,D65C,BN41-0 | 1 | S.N.A |
| T0001 | BN96-00314E | ASSY COVER P-BACK;42D4,ASSY C/BACK | 1 | S.N.A |
| T0112 | BN63-00529A | COVER-BACK;42P3H,AL 3031,T1.2 | 1 | S.N.A |
| T0916 | BN61-00202A | BRACKET-HANDLE;42P3S,AL5052,T1.5,DGM-S81 | 2 | S.N.A |
| T0555 | BN96-01280A | ASSY MISC P-BRKT TERMINAL;42D4,SHIELD FO | 1 | S.N.A |
| T0256 | BN64-00143B | DECORATION-BACK;SPD-42P3H,PC+ABS,5V | 1 | S.N.A |
| T0074 | BN59-00376B | REMOCON;TM-75,MUSE_UO,S3C1860XNOSMB1,36, | 1 | |
| T0268 | 3903-000144 | CBF-POWER CORD;DT,US,BP3/Y,U(IEC C13-RA) | 1 | |