


TO ADM3
BK202

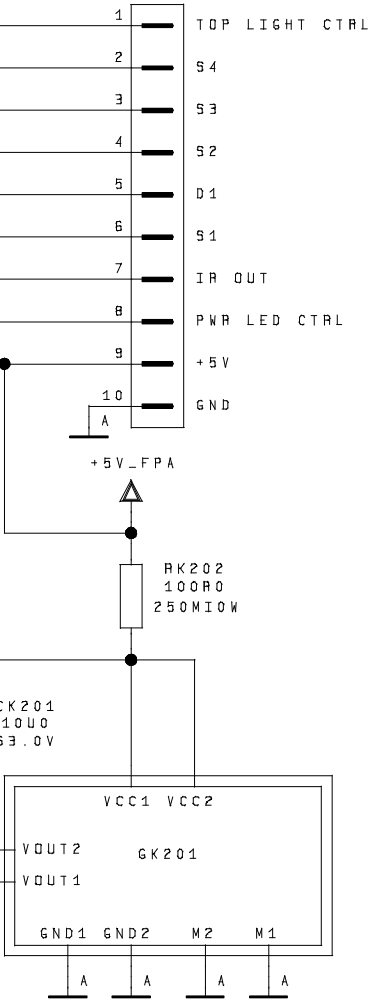

- SCHEMATIC NOTES
1. RESISTANCE VALUES ARE IN OHMS; K=X1000, Meg=X1,000,000.
RESISTORS ARE 0.250W OR LESS 5%, EXCEPT WHERE INDICATED.
[] INDICATES FLAT MAXI-CHIP COMPONENT, 1/8W EXCEPT WHERE INDICATED.
/ \ INDICATES FLAT MINI-CHIP COMPONENT, 1/16W EXCEPT WHERE INDICATED.
 2. CAPACITANCE VALUES 1.0 AND ABOVE ARE IN pF, VALUES BELOW 1.0 ARE IN pF EXCEPT WHERE INDICATED. VOLTAGE RATING IS 50V EXCEPT WHERE INDICATED.
[] INDICATES FLAT MAXI-CHIP COMPONENT.
/ \ INDICATES FLAT MINI-CHIP COMPONENT.
 3. \ / INDICATES FLAT MINI-CHIP COMPONENT.
↓ DENOTES CHASSIS GROUND. @ INDICATES CONNECTION VIA POINT-TO-POINT WIRE.
↑ DENOTES ISOLATED GROUND.
—○— INDICATES JUMPER WIRE.
—○— INDICATES ZERO OHM CHIP COMPONENT.
- VOLTAGES IN () MEASURED IN ECO OR STANDBY MODE

ALL INTEGRATED CIRCUITS
AND MANY OTHER SEMICON-
DUCTORS ARE ELECTROSTATI-
CALLY SENSITIVE AND REQUIRE
SPECIAL HANDLING TECHNIQUES
DESCRIBED UNDER "ELECTROSTATI-
CALLY SENSITIVE (ES) DEVICES" IN THE
SAFETY AND SERVICING PRECAUTIONS
PUBLICATION.

PRODUCT SAFETY NOTE

COMPONENTS WITH A ⚠ HAVE SPE-
CIAL CHARACTERISTICS IMPORTANT TO
SAFETY. BEFORE REPLACING ANY OF
THESE COMPONENTS READ CAREFULLY
THE PRODUCT SAFETY NOTICE IN THIS
SERVICE DATA. DO NOT DEGRADE THE
SAFETY OF THE SET THROUGH
IMPROPER SERVICING.